

AD-A102 119

ARMY ENGINEER DISTRICT PHILADELPHIA PA

F/G 8/8

FLOOD PLAIN INFORMATION, TOMS RIVER, UNION BRANCH RIDGEWAY BRAN--ETC(U)


JUN 72

UNCLASSIFIED

DAEN/NAP-82040/FPI41-72/0

NL

1 OF 1
AD A
102 119

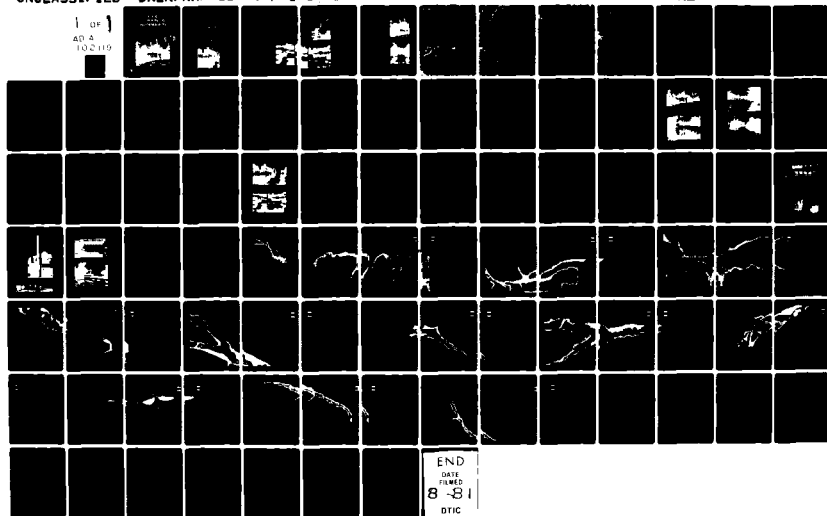

REPT. NO: DAEN/NAP-82040/FA41-72/06

FLOOD PLAIN LEVEL II INFORMATION

ADAMS RIVER
TOMS RIVER UNION BRANCH RIDGEWAY
BRANCH AND LONG SWAMP CREEK
OCEAN COUNTY, NEW JERSEY



DTIC
ELECTE
JUL 28 1981
S D


*Original contains color
plates: All DTIC reproductions
will be in black and
white.

DTIC FILE COPY

PREPARED FOR THE OCEAN COUNTY PLANNING BOARD BY THE DEPT. OF THE ARMY,
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS, PHILADELPHIA, PA.


2.5-28-75
JUNE 1972

APPROVED FOR PUBLIC RELEASE
DISTRIBUTION UNLIMITED.

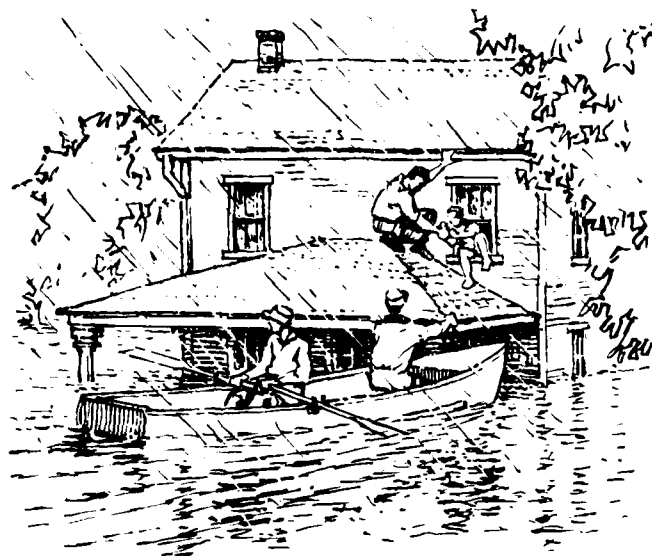

FLOODS

in TOMS RIVER
NEW JERSEY

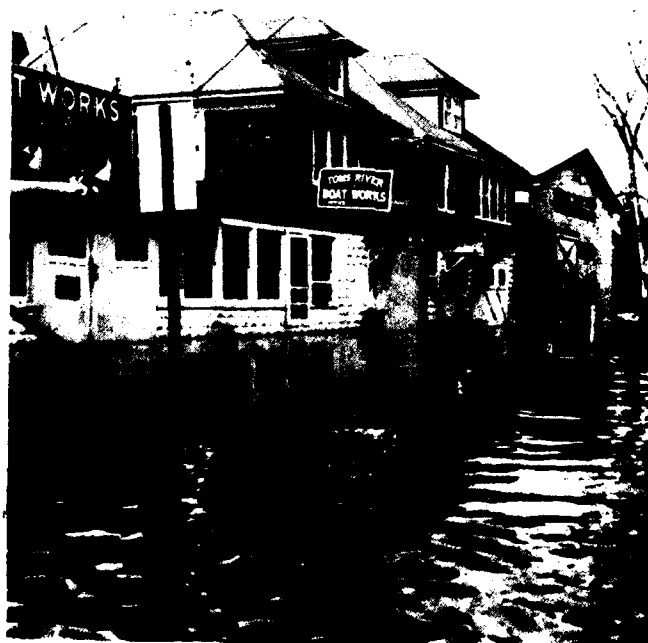

FLOODS

IN TOMS RIVER, NEW JERSEY

This folder is an announcement of and supplement to the "Flood Plain Information (FPI) Report, Toms River, Ocean County, New Jersey." The report has been prepared to emphasize the importance of flood potential and flood hazards in land use planning and to aid in management decisions concerning flood plain utilization.

Although the City of Toms River and other communities along Toms River, Union Branch, Ridgeway Branch, and Long Swamp Creek have not suffered extensive damage from past floods, studies indicate that larger floods may occur. Emphasis is given to future floods in the FPI Report. Maps, profiles and cross sections have been included to illustrate the possible extent and severity of future floods.

Included in this folder is a photograph showing possible future flood heights at the Toms River Boat Works. The flood height shown for a large flood, the New Jersey Floodway Design Flood (NJFDF), is one that occurs once in 100 years on the average, although it could occur in any year. Also indicated is the flood height that would be reached if a very large, Standard Project Flood (SPF), should occur. The SPF represents a reasonable upper limit of expected flooding in the study area.

HIGHEST FLOODS RECORDED ON TOMS RIVER (At U.S.G.S. Gage #4085, Located 1 Mi. Downstream of Union Branch)

| <u>Date of Crest</u> | <u>Elevation</u> Ft.-m.s.l.d. |
|----------------------|----------------------------------|
| May 31, 1968 | 19.40 |
| August 29, 1971 | 19.35 |
| June 14, 1968 | 19.25 |
| July 31, 1969 | 19.13 |
| Overbank | 16.1 |

POSSIBLE FUTURE FLOODS FOR PLANNING

| | |
|---|------|
| Large (100 Year)—New Jersey Floodway Design Flood (NJFDF) | 20.8 |
| Very Large—Standard Project Flood (SPF) | 26.7 |

Inside are sketches illustrating the horizontal and vertical relationships of flooded areas and a flood map from the FPI Report showing the extent of the Floodway Design and Standard Project Floods.



D ON TOMS RIVER

85, Located
 ion Branch)

| Elevation |
|--------------|
| Ft.-m.s.l.d. |
| 19.40 |
| 19.35 |
| 19.25 |
| 19.13 |
| 16.1 |

FOR PLANNING

| | |
|---------------|------|
| y Floodway | 20.8 |
| od (NJFDF) | |
| y Flood (SPF) | 26.7 |

ating the horizon-
 ships of flooded
 om the FPI Report
 Floodway Design
 ods.



Possible future flood heights at Toms River Boat Works

Flooded Boat Works - March 1962



ACTION IS NEEDED

The flood plain of Toms River is moderately developed from Barnegat Bay past the Town of Toms River. With new economic growth and industrial and residential expansion in Ocean County, the flood plains upstream of Toms River will come under pressure for development. Now is the proper time to take actions which will prevent devastation from large floods.

Effective regulatory measures such as zoning ordinances, subdivision regulations, and building codes can be designed to prevent increased flood damages. Flood proofing can reduce potential damages to properties already subject to flooding. Works to modify flooding can also be a part of the long-run solution.

The communities along Toms River are not the only ones with flooding problems. Flood plain information has already been provided for many of several thousand flood-plagued communities. Nearly 400 of those having FPI Reports by mid 1971 have adopted or strengthened regulations, while 700 others have them under study. An additional 600 communities have used the FPI Reports to establish interim land use control.

This folder has been prepared for the Ocean County Planning Commission by the U. S. Army Corps of Engineers from data in the Report "Flood Plain Information, Toms River, Ocean County, New Jersey." Copies of the report and this folder are available upon request from the Ocean County Planning Board.




Brook Road over Union Branch




Union Branch Downstream of Dam

**BUILDING
in the
FLOOD PLAIN
can make
FLOODS
WIDER
and
DEEPER**

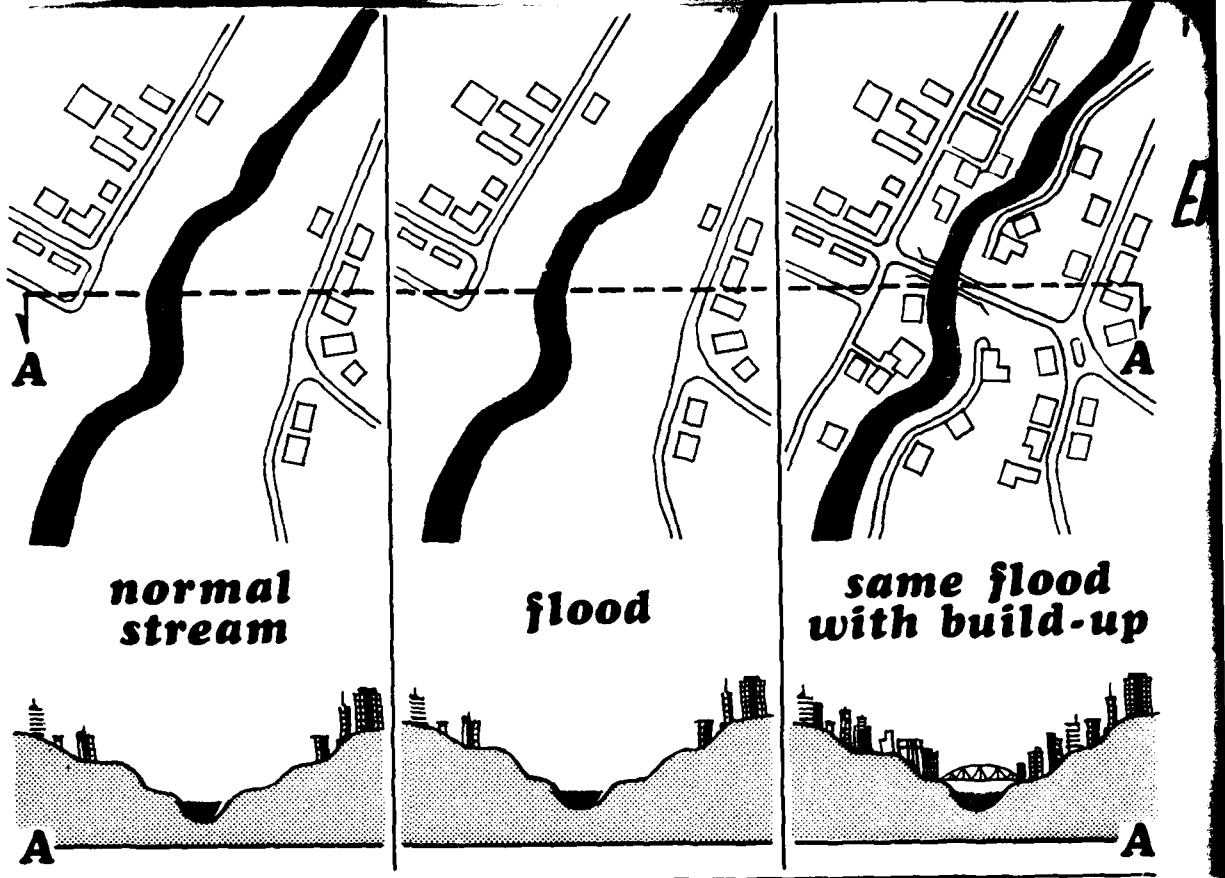

TOOLS of FLOOD PLAIN MANAGEMENT for the reduction of Flood Damage and

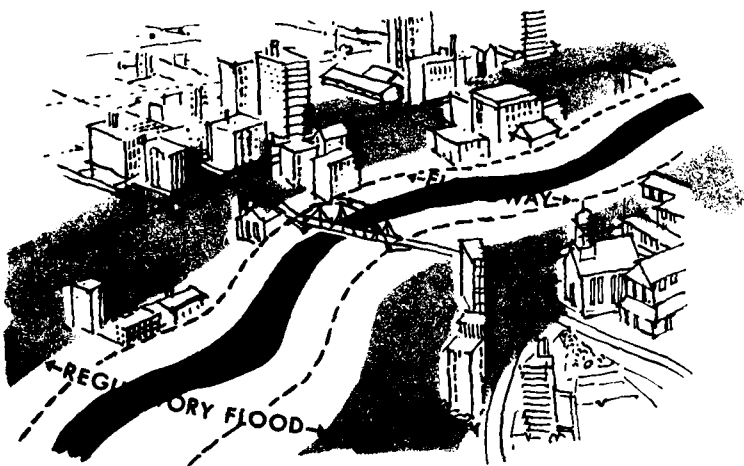


MEASURES TO REDUCE VULNERABILITY TO FLOODS provide for a future with more freedom from flood damage, often at minor cost and with little adverse effect on the environment


REGULATIONS

- (ZONING, BUILDING CODES, SUBDIVISION)
- FLOOD PROOFING • RELOCATIONS •
- URBAN RENEWAL •


MEASURES TO MODIFY FLOODS are often required to alleviate existing problems and sometimes to forestall future problems . . .




DAMS & RESERVOIRS

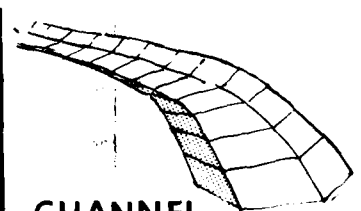


CHANNEL ENLARGEMENT



HIGH FLOW DIVERSION

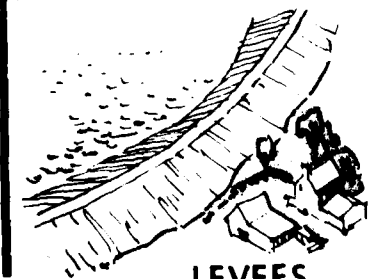


LEVEES

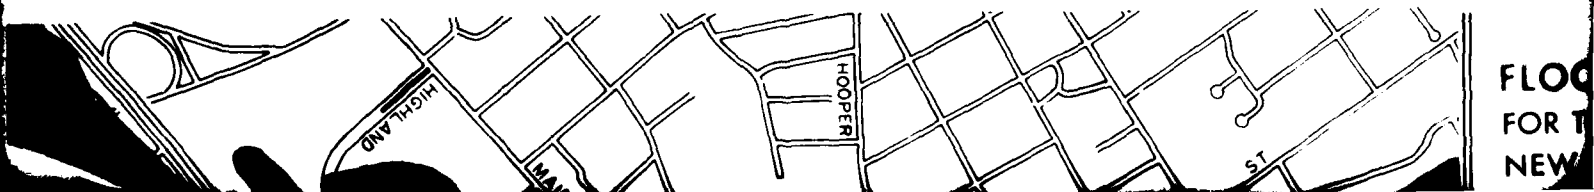

**FLOOD
FOR THE
NEW**


this
ENCROACHMENT
can change
a
Small Flood
into a
MAJOR FLOOD

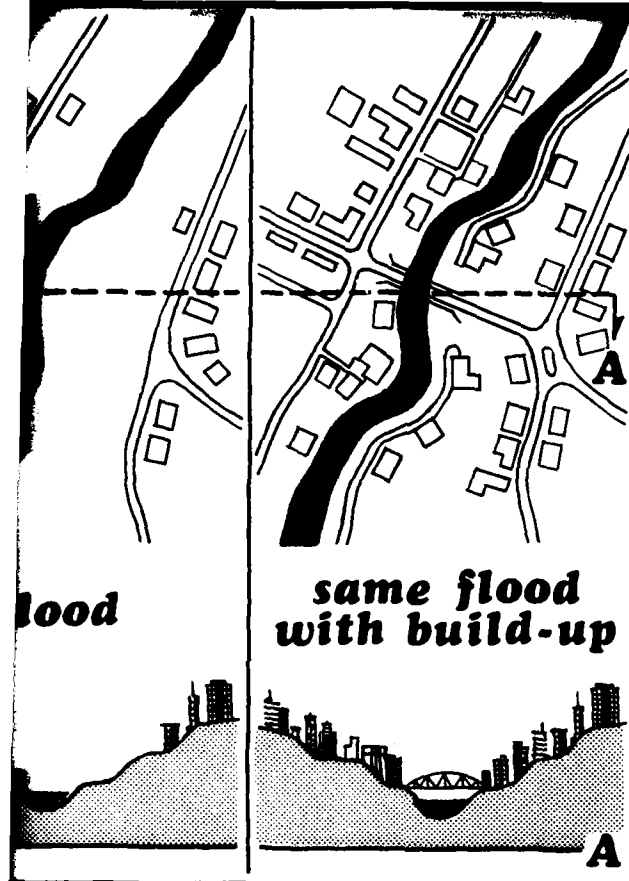


the reduction of Flood Damage and Human Suffering

MEASURES TO MODIFY FLOODS


are required to alleviate existing problems and
measures to forestall future problems . . .




DAMS & RESERVOIRS

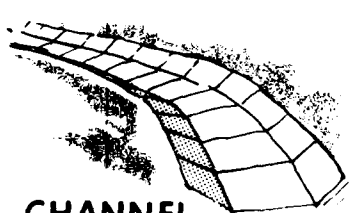

CHANNEL ENLARGEMENT



FLOOD FLOW DIVERSION

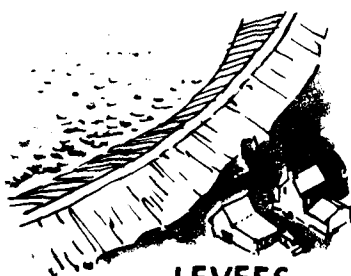

LEVEES


OTHER MEASURES
aid the Flood Plain
occupant in coping
with floods . . .

EDUCATION

TAX ADJUSTMENTS

FLOOD INSURANCE

WARNING & EMERGENCY PLANS

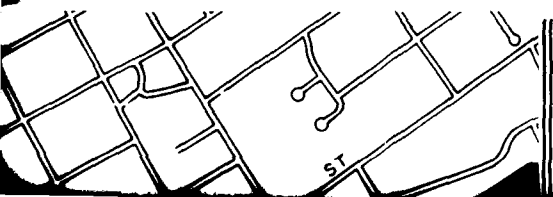

**FLOOD PATTERNS
FOR TOMS RIVER
NEW JERSEY**

adverse effect on the environment
 REGULATIONS
 (ZONING, BUILDING CODES, SUBDIVISION)
 • FLOOD PROOFING • RELOCATIONS •
 • URBAN RENEWAL •

HIGH FLOW
 DIVERSION

LEVEES



FLOOD
 FOR TOM
 NEW JER

LEGE

approx
 of over


NORM

N. J. F
 DESIG

STAND
 FLOOD

PROFILES
 Flood Plain
 show ele
 these flo
 for the e

**CHANNEL
ENLARGEMENT**

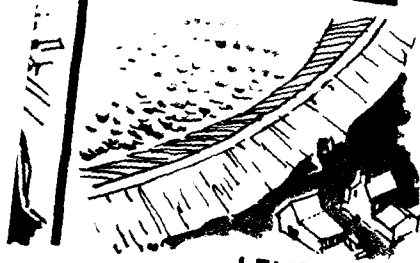

LEVEES

ADJUSTMENTS

**FLOOD
INSURANCE**

**WARNING &
EMERGENCY
PLANS**

**FLOOD PATTERNS
FOR TOMS RIVER
NEW JERSEY**

LEGEND

approximate limits
of overflow




NORMAL STREAM

**N. J. FLOODWAY
DESIGN FLOOD (NJFDF)**

**STANDARD PROJECT
FLOOD (SPF)**

**PROFILES in the
Flood Plain Information Report
show elevations of
these floods
for the entire study area**

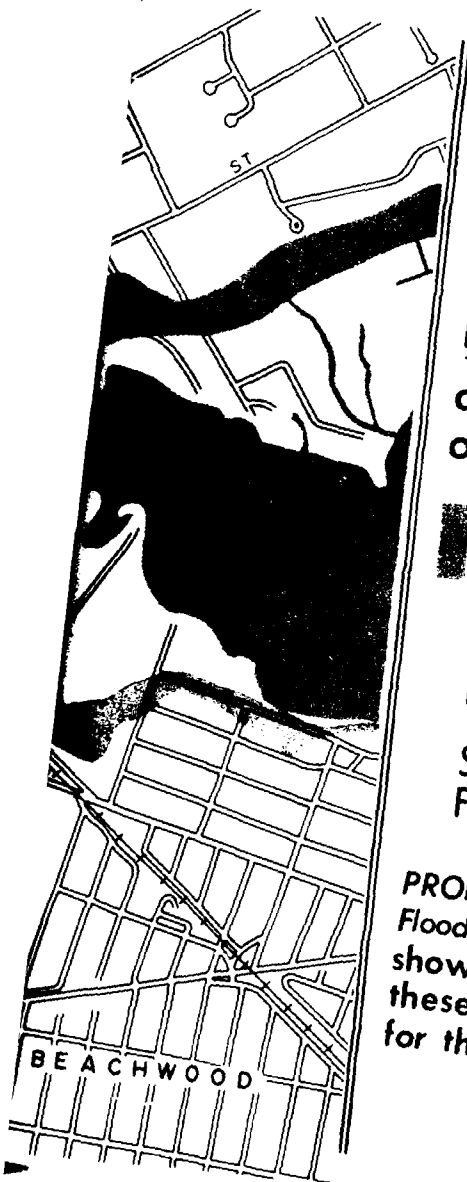

TO THE REQUESTOR:

This Flood Plain Information (FPI) Report was prepared by the Philadelphia District office of the U.S. Army Corps of Engineers, under the continuing authority of the 1960 Flood Control Act, as amended. The report contains valuable background information, discussion of flood characteristics and historical flood data for the study area. The report also presents through tables, profiles, maps and text, the results of engineering studies to determine the possible magnitude and extent of future floods, because knowledge of flood potential and flood hazards is important in land use planning and for management decisions concerning floodplain utilization. These projections of possible flood events and their frequency of occurrence were based on conditions in the study area at the time the report was prepared.

Since the publication of this FPI Report, other engineering studies or reports may have been published for the area. Among these are Flood Insurance Studies prepared by the Federal Insurance Administration of the Federal Emergency Management Agency, Flood Insurance Studies generally provide different types of flood hazard data (including information pertinent to setting flood insurance rates) and different types of floodplain mapping for regulatory purposes and in some cases provide updated technical data based on recent flood events or changes in the study area that may have occurred since the publication of this report.

It is strongly suggested that, where available, Flood Insurance Studies and other sources of flood hazard data be sought out for the additional, and, in some cases, updated flood plain information which they might provide. Should you have any questions concerning the preparation of, or data contained in this FPI Report, please contact:

U.S. Army Corps of Engineers
Philadelphia District
Custom House, 2nd and Chestnut Streets
Philadelphia, PA 19106

ATTN: Flood Plain Mgt. Services Branch, NAPEN-M

Telephone number: (215) 597-4807

| REPORT DOCUMENTATION PAGE | | READ INSTRUCTIONS BEFORE COMPLETING FORM |
|---|---|---|
| 1. REPORT NUMBER DAEN/NAP-82040/FPI41-72/06 | 2. GOVT ACCESSION NO. AD-A202 779 | 3. RECIPIENT'S CATALOG NUMBER |
| 4. TITLE (and Subtitle) Flood plain information Toms River, Union Branch, Ridgeway Branch, and Long Swamp Creek, Ocean County, New Jersey | 5. TYPE OF REPORT & PERIOD COVERED | |
| 7. AUTHOR(s) | 6. PERFORMING ORG. REPORT NUMBER DAEN/NAP-82040/FPI41-72/06 | |
| 9. PERFORMING ORGANIZATION NAME AND ADDRESS U.S. Army Engineer District Philadelphia 2nd & Chestnut Sts. Philadelphia, PA 19106 | 8. CONTRACT OR GRANT NUMBER(s) | |
| 11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Engineer District Philadelphia 2nd & Chestnut Sts. Philadelphia, PA 19106 | 10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS 12 87 | |
| 14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office) | 12. REPORT DATE June, 1972 | |
| | 13. NUMBER OF PAGES 40 | |
| | 15. SECURITY CLASS. (of this report) UNCLASSIFIED | |
| | 15a. DECLASSIFICATION/DOWNGRADING SCHEDULE | |
| 16. DISTRIBUTION STATEMENT (of this Report) <div style="border: 1px solid black; padding: 5px; text-align: center;"> DISTRIBUTION STATEMENT A Approved for public release; Distribution Unlimited </div> | | |
| 17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report) | | |
| 18. SUPPLEMENTARY NOTES | | |
| 19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Toms River, NJ Ocean County Planning Board Union Branch, NJ Floods Ridgeway Branch, NJ Flood forecasting Long Swamp Creek, NJ Flood plains | | |
| 20. ABSTRACT (Continue on reverse side if necessary and identify by block number) The portions of Ocean County covered by this report were subject to flooding from Tom's River and its tributaries, Union Branch, Ridgeway Branch, and Long Swamp Creek. These areas were moderately damaged by floods of 1950, 1962 and 1968. Included within the scope of this study was a history of flooding in Ocean County near Toms River. Special emphasis was given to these floods thru maps, photographs, profiles and cross sections. | | |

Under authority of Section 206 of the 1960 Flood Control Act as amended the flood plain information was prepared by the U.S. Army Corps of Engineers Philadelphia District at the request of the Ocean County Planning Board. The information should be considered for its historical nature. Since the publication of this FPI report other Flood Insurance studies have been undertaken and should also be consulted for more current information.

| | |
|--------------------|-------------------------------------|
| Accession For | |
| NTIS GRA&I | <input checked="" type="checkbox"/> |
| DTIC TAB | <input type="checkbox"/> |
| Unannounced | <input type="checkbox"/> |
| Justification | |
| By | |
| Distribution/ | |
| Availability Codes | |
| Dist | Avail and/or Special |
| A | |

NOTICE

THIS DOCUMENT HAS BEEN REPRODUCED
FROM THE BEST COPY FURNISHED BY
THE SPONSORING AGENCY. ALTHOUGH
IT IS RECOGNIZED THAT CERTAIN POR-
TIONS ARE ILLEGIBLE, IT IS BEING
RELEASED IN THE INTEREST OF MAKING
AVAILABLE AS MUCH INFORMATION AS
POSSIBLE.

APPROVED FOR PUBLIC RELEASE;
DISTRIBUTION UNLIMITED.

CONTENTS

| | Page |
|---|------|
| PREFACE | i |
| BACKGROUND INFORMATION | 1 |
| Settlement. | 1 |
| The Stream and Its Valley | 1 |
| Developments in the Flood Plain | 2 |
| FLOOD SITUATION | 4 |
| Sources of Data and Records | 4 |
| Flood Season and Flood Characteristics | 4 |
| Factors Affecting Flooding and Its Impact | 5 |
| Obstructions to floodflows. | 5 |
| Flood damage reduction measures | 5 |
| Other factors and their impacts | 8 |
| Flood warning and forecasting | 8 |
| Flood fighting and emergency evacuation plans | 8 |
| Material storage on the flood plain | 9 |
| PAST FLOODS | 10 |
| Summary of Historical Floods. | 10 |
| Flood Records. | 10 |
| Flood Descriptions | 12 |
| 25 November 1950. | 12 |
| 6-7 March 1962 | 12 |
| FUTURE FLOODS | 14 |
| Floodway Design Flood and Flood Hazard Area | 14 |
| Design Flood | |
| Standard Project Flood | 15 |
| Frequency | 17 |
| Hazards of Large Floods. | 17 |

REPT. NO: DAEN/NAP-82040/FPI 41-72/06

CONTENTS (Continued)

| | Page |
|--|------|
| Flooded areas and flood damages | 17 |
| Obstructions | 18 |
| Velocities of flow | 20 |
| Rates of rise and duration of flooding | 20 |
| Photographs, future flood heights | 21 |
| GLOSSARY | 25 |

TABLES

| | | |
|-------|---|----|
| Table | | |
| 1 | Drainage Areas (Toms River, Union and Ridgeway Branches and Longswamp Creek) | 2 |
| 2 | Population Trends of Ocean County, New Jersey | 3 |
| 3 | Flood Crest Elevations (Toms River, Near Toms River, New Jersey) | 10 |
| 4 | Precipitation at Toms River, New Jersey (National Weather Service Gage at Toms River Water Company) | 11 |
| 5 | Peak Flows for Floodway Design, Flood Hazard Area Design and Standard Project Floods | 15 |
| 6 | Relative Flood Heights on Toms River and Union Branch | 16 |
| 7 | Elevation Data (Bridges Across Toms River, Union and Ridgeway Branches and Longswamp Creek) | 19 |
| 8 | Maximum Average Velocities (Toms River, Union and Ridgeway Branches and Longswamp Creek) | 20 |
| 9 | Rates of Rise and Duration (U.S.G.S. Gage on Toms River) | 21 |


CONTENTS (Continued)

| Plate | | |
|-------|--|-----------------|
| 1 | General Map | Opposite Page i |
| 2 | Flood Limit and Index Map | |
| 3-13 | Flooded Areas | |
| 14 | High Water Profiles (Toms River Main Stem) | |
| 15 | High Water Profiles (Ridgeway Branch and Union Branch) | |
| 16 | High Water Profiles (Long Swamp Creek) | |
| 17 | Selected Cross Sections (Toms River Main Stem) | |
| 18 | Selected Cross Sections (Ridgeway Branch and Union Branch) | |
| 19 | Discharge Hydrograph | |

. At end of report

FIGURES

| Figure | | Page |
|--------|--|------|
| 1 | Brook Road Bridge over Union Branch | 6 |
| 2 | Beacon Street bridge over Union Branch | 6 |
| 3 | Pine Lake Dam on Union Branch | 7 |
| 4 | Flood waters downstream of Pine Lake Dam | 7 |
| 5-6 | March 1962 flood at Toms River Boat Works | 13 |
| 7 | Future flood heights at Toms River Boat Works | 22 |
| 8 | Future flood heights at the New Jersey Central Railroad bridge in Toms River | 23 |
| 9 | Future flood heights at the Travel Lodge Motel in Toms River | 24 |
| 10 | Future flood heights at Brook Road along Union Branch | 24 |

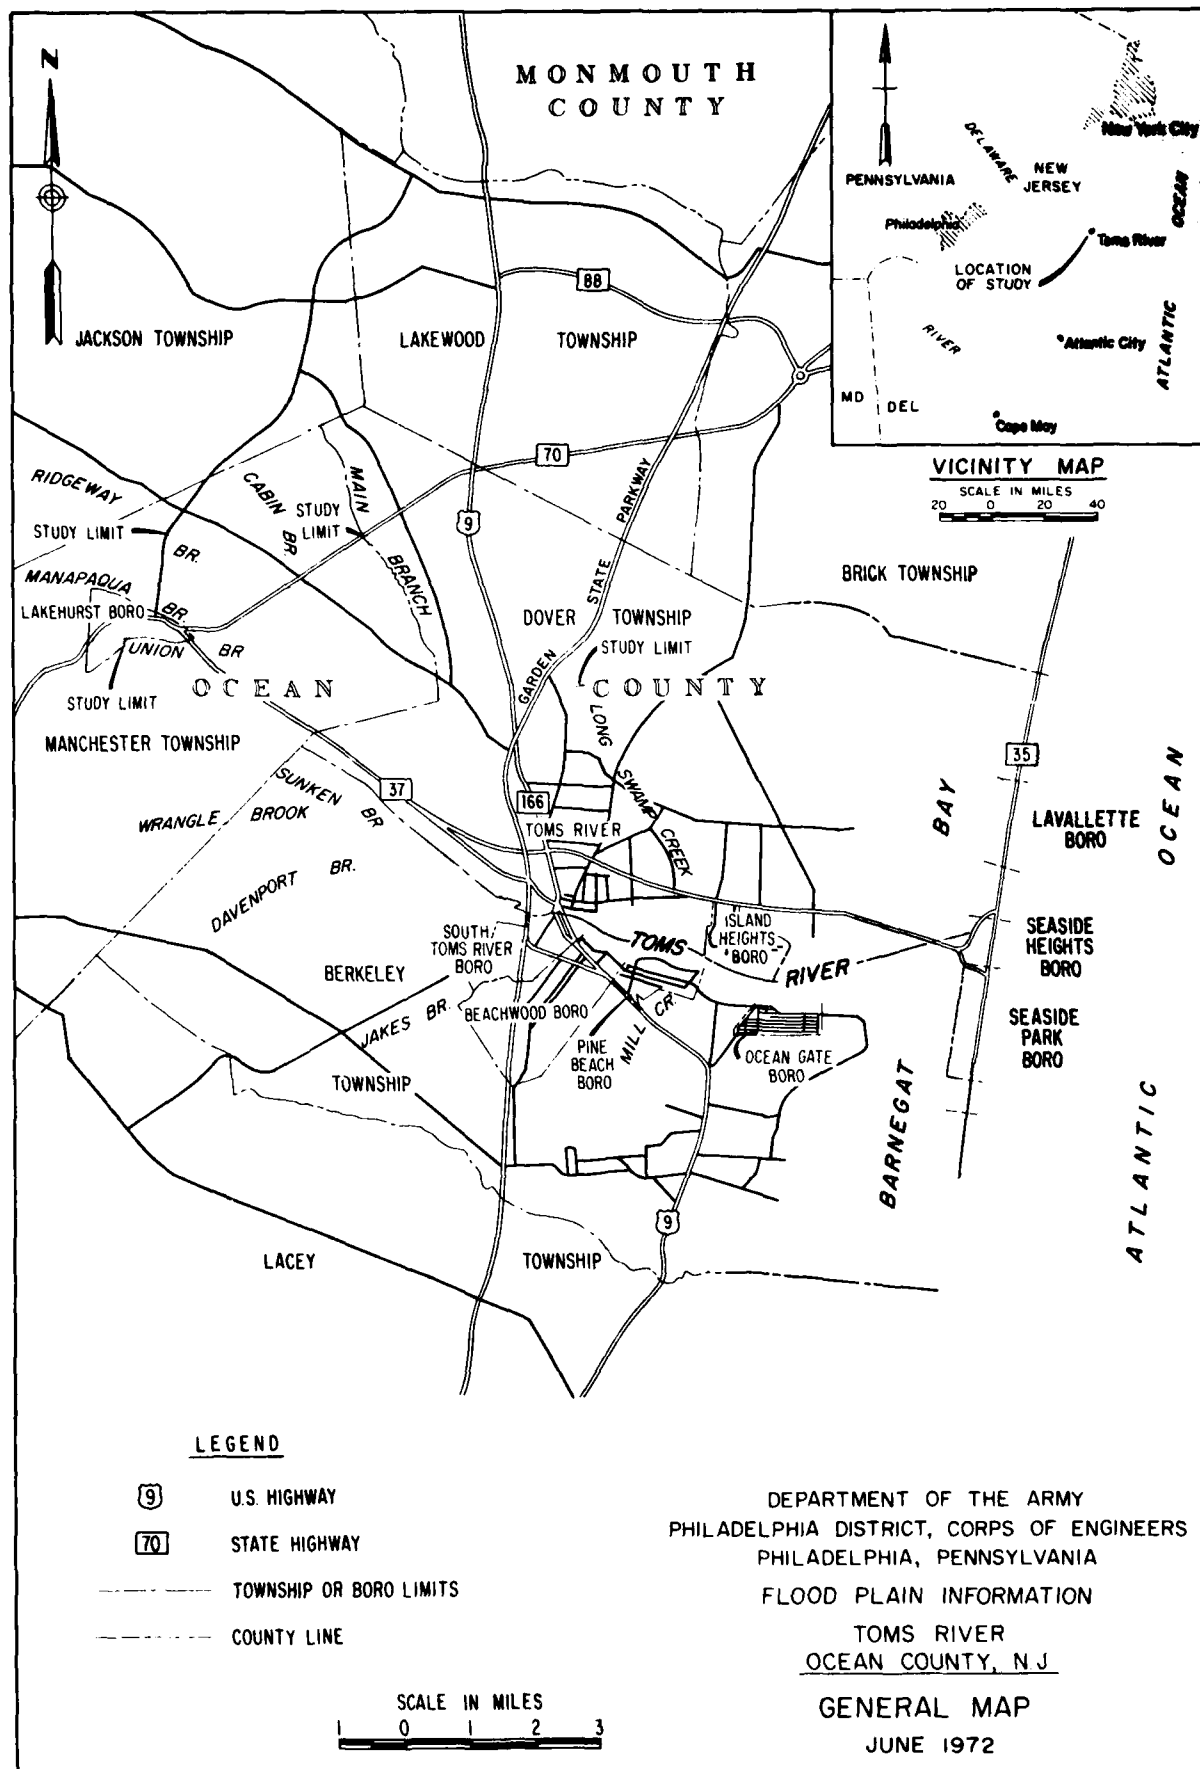

PREFACE

The portion of Ocean County covered by this report is subject to flooding from Toms River and its tributaries, Union Branch, Ridgeway Branch, and Long Swamp Creek. The properties along these streams are primarily residential and commercial and have been moderately damaged by floods of 1950, 1962 and 1968. The open spaces in the flood plains which may come under pressure for future development are extensive. Although large floods have occurred in the past, studies indicate that even larger floods are possible.

This report has been prepared because a knowledge of flood potential and flood hazards is important in land use planning and for management decisions concerning flood plain utilization. It includes a history of flooding in Ocean County near Toms River and identifies those areas that are subject to possible future floods. Special emphasis is given to these floods through maps, photographs, profiles, and cross sections. The report does not provide solutions to flood problems; however, it does furnish a suitable basis for the adoption of land use controls to guide flood plain development and thereby prevent intensification of the loss problems. It will also aid in the identification of areas where other flood damage reduction techniques such as works to modify flooding and adjustments, including flood proofing, might be embodied in an overall Flood Plain Management (FPM) program. Other FPM program studies - those of environmental attributes and the current and future land use role of the flood plain as part of its surroundings - would also profit from this information.

At the request of the Ocean County Planning Board and endorsement of the New Jersey Department of Environmental Protection, this report was prepared by the Corps of Engineers, Philadelphia District Office, under continuing authority provided in Section 206 of the 1960 Flood Control Act, as amended.

Assistance and cooperation of the United States Geological Survey (U.S.G.S.), the Ocean County Engineering Department, the Ocean County Sun, and private citizens in supplying useful data and photographs for the preparation of this report are appreciated.

Additional copies of this report can be obtained from the Ocean County Planning Board. The Philadelphia District, Corps of Engineers, upon request, will provide technical assistance to planning agencies in the interpretation and use of the data presented as well as planning guidance and further assistance, including the development of additional technical information.

BACKGROUND INFORMATION

Settlement

Toms River was so named in the early seventeen hundreds for a personage by the name of Tom, but historians have no documented proof as to the specific person. He must have been an outstanding man in the area for individuals to designate the river as Toms River. The area surrounding Toms River is rich with the history of the Revolutionary War and formation of the early United States. Toms River was an important source of salt and charcoal for Washington's army. Privateers that hid in Barnegat Bay were able to prey on ocean going British ships and many valuable cargoes were sold at auction to the colonists in Toms River, New Jersey.

Industries and mills sprang up on the banks of Toms River as the settlers took advantage of the great timber and water supply. Sawmills produced large quantities of lumber for shipbuilding and construction. The shipbuilding industry attracted merchants and fishermen to this area and Toms River became an important early trade center.

The original industries and economic sources disappeared long ago, but the area is presently undergoing rapid development and vast amounts of open land are now being utilized for new industrial parks, commercial establishments, and residential areas. Much of this open land is part of the flood plain of Toms River and its tributaries. The number of encroachments on the flood plain will increase as this area experiences its greatest economic growth.

The Stream and Its Valley

Toms River originates in Millstone Township, Monmouth County, near the Monmouth-Ocean County Line. It flows through Ocean County where the largest part of the drainage basin is located. The drainage basin of Toms River has a total area of 188.5 square miles. Drainage areas contributing to runoff in the Toms River Basin are shown in Table 1.

Toms River, Union Branch, and Ridgeway Branch have physical characteristics similar to those of many other streams in this part of New Jersey. The land encompassing the stream is a gently-undulating plain having low relief. Stream gradients are very slight, varying from 5 to 6 feet per mile. Because of the flat gradient and low relief of surrounding land, Toms River and its tributaries have formed a broad, poorly-drained flood plain with abundant swamp and marshland. On the flood plain, the streams meander sharply from side to side in a series of tightly-compressed loops and are overgrown throughout their lengths with heavy brush and trees. Long Swamp Creek flows through more rugged terrain as indicated by its average slope of 13.5 feet per mile. The creek meanders very little compared to other tributaries, but the flat, swampy plain is still evident.

The tide at the mouth of Toms River is of equal elevation to that of Barnegat Bay, which is influenced by the tidal changes of the Atlantic Ocean. Tidal stages on Toms River are normally affected only 1 to 2 feet due to the protection of the river's mouth by a 23-mile long barrier beach and the great expanse of Barnegat Bay. The land area adjacent to the mouth of Toms River is a low, tidal salt marsh with numerous coves and fresh water creek outfalls.

The climate is generally mild with a few extreme temperature changes. The temperature may climb above 90° F. on some summer days or drop below 20° on some winter days. The annual precipitation for the area averages 50 inches per year. During the winter months, there is occasional snowfall, but very little water is contributed to the total runoff.

TABLE 1
DRAINAGE AREAS
TOMS RIVER, UNION & RIDGEWAY BRANCHES & LONG SWAMP CREEK

| Location | Mileage Above Mouth | Drainage Area | |
|--|---------------------------|-----------------------------|-----------------|
| | | <u>Tributary</u> sq. mi. | <u>Total(a)</u> |
| <u>Main Branch Toms River</u> | | | |
| New Jersey Rt. 70 | 13.8 | --- | 51.6 |
| Union Branch | 10.6 | 61.0 | --- |
| Confluence with Union Branch | 10.6 | --- | 117.0 |
| At U.S.G.S. gage | 8.8 | --- | 124.0 |
| Wrangle Brook | 4.7 | 33.4 | --- |
| Long Swamp Creek | 1.9 | 6.3 | --- |
| At Confluence with Barnegat Bay | 0.0 | --- | 188.5 |
| <u>Union Branch</u> | | | |
| Ridgeway Branch | 2.1 | 31.8 | --- |
| At Confluence with Main Branch Toms River | 0.0 | --- | 61.0 |
| <u>Ridgeway Branch</u> | | | |
| New Jersey Rt. 547 | 4.7 | --- | 27.2 |
| At Confluence with Union Branch | 0.0 | --- | 31.8 |

(a) Drainage area includes tributary drainage

(a) Drainage area includes tributary drainage

Developments in the Flood Plain

Toms River is highly developed from its mouth on Barnegat Bay to the Town of Toms River, New Jersey, which is located 4 miles upstream. The development on the flood plain consists primarily of private residences, but a few commercial buildings, a country club, a naval academy, and a yacht club are also located on the river banks in this area. This section of Toms River has been developed as a recreational area because of its access to Barnegat Bay and the Atlantic Ocean. Many docks have been constructed on the river to moor and service the large number of pleasure craft and several parks have been created in this area to preserve the natural beauty of the river.

Above the Town of Toms River, the flood plain of the river and its tributaries is relatively undeveloped, except for a short portion of Union Branch and Ridgeway Branch where the Borough of Lakehurst and Lakehurst Naval Air Station lie between these branches. The undeveloped flood plains of Toms River and its tributaries have limited agricultural use, but blueberries and cranberries grown here are important revenue producing crops. However, the Toms River area is presently undergoing intensive development, with many industrial parks being constructed along the railroad facilities and major highways. Some of these developments are infringing on the flood plain of Toms River. Continued industrial and commercial activity and subsequent increase in population will probably occur in the area, intensifying development of the flood plain.

Population trends shown on Table 2 indicate the rapid growth the area has undergone in recent years and there is every indication that this increase in population will continue.

TABLE 2
POPULATION TRENDS OF OCEAN COUNTY, NEW JERSEY (a)

| Date | Population |
|------|---------------------|
| 1950 | 56,622 |
| 1960 | 108,241 |
| 1970 | 171,000 (Estimated) |
| 1975 | 259,469 (Estimated) |

(a) Source: Toms River, Dover Township, N.J., Office of the Industrial Commission Report entitled "A Statistical and Factual Analysis"

FLOOD SITUATION

Sources of Data and Records

The National Weather Service Branch of the National Oceanic and Atmospheric Administration (NOAA) maintains a non-recording precipitation gage at the Toms River Water Company.

The U.S.G.S. maintains a recording gage on Toms River near the Town of Toms River, New Jersey, and a maximum height gage located on Barnegat Bay. A record of flood stages dating back to 1928 was obtained from the Toms River gage; however, only seven years of record, since 1965, are available from the maximum height gage on Barnegat Bay. Peak tide elevations were also obtained from the Office of the Ocean County Engineer.

Useful information and data were taken from Special Report No. 29 of the State of New Jersey Department of Conservation and Economic Development, Division of Water Policy and Supply (now the Department of Environmental Protection, Division of Water Resources). This report, entitled "Geology and Ground Water Resources of Ocean County, New Jersey", was prepared in cooperation with the United States Department of the Interior in 1969.

To supplement the records at the gaging stations, newspaper files, historical documents and records were searched for information concerning past floods. These records have provided a knowledge of floods which have occurred on Toms River.

Maps were prepared from the U.S. Geological Survey Quadrangles drawn to a scale of 1:24,000 and having a contour interval of 10 feet. The following quadrangles were used: Seaside Park, New Jersey - 1953; Toms River, New Jersey - 1953; Lakewood, New Jersey - 1954; Lakehurst, New Jersey - 1957; Cassville, New Jersey - 1957; and, Roosevelt, New Jersey - 1957. Structural data on bridges and culverts, as well as stream cross sections, were obtained in field surveys performed by personnel of the Corps of Engineers, Philadelphia District.

Flood Season and Flood Characteristics

Floods occurring in the study area result from tropical hurricanes and "northeasters". The more common northeaster storm can occur during all times of the year and is characterized by its general rainfall over the entire drainage basin, which causes flooding in the upper reaches of Toms River. Tropical hurricanes comprise the majority of the most severe storms and occur during the late summer and fall. Hurricanes not only cause flooding due to heavy precipitation but also create unusually high tides and high winds, causing severe damage to coastal areas.

Factors Affecting Flooding and Its Impact

Obstructions to floodflows - Natural obstructions to floodflows include trees, brush and other vegetation growing along the stream banks in floodway areas. Man-made encroachments on or over the streams such as dams, bridges and culverts can also create more extensive flooding than would otherwise occur. Photographs taken 27 October 1971 to illustrate obstructions to floodflows are shown in Figures 1 through 4. Figure 1 is Brook Road with the water level at the top of the wooden planks. Beacon Street bridge, Figure 2, is shown with the water level at the underclearance. Water pouring over the Pine Lake Dam on Union Branch is shown in Figure 3, and downstream view from the catwalk over the dam is provided in Figure 4.

During floods, trees, brush and other vegetation growing in floodways impede floodflows, thus creating backwater and increased flood heights. Trees and other debris may be washed away and carried downstream to collect on bridges and other obstructions to flow. As floodflow increases, masses of debris break loose and a wall of water and debris surges downstream until another obstruction is encountered. Debris may collect against a bridge until the load exceeds its structural capacity and the bridge is destroyed. The limited capacity of obstructive bridges or culverts, debris plugs at the culvert mouth or a combination of these factors retard floodflows and result in flooding upstream, erosion around the culvert entrance and bridge approach embankments and possible damage to the overlying roadbed.

In general, obstructions restrict floodflows and result in overbank flows and unpredictable areas of flooding, destruction of or damage to bridges and culverts, and an increased velocity of flow immediately downstream. It is impossible to predict the degree or location of the accumulation of debris; therefore, for the purposes of this report, it was necessary to assume that there would be no accumulation of debris to clog any of the bridge or culvert openings in the development of the flood profiles.

The two dams in the study area, one at Pine Lake, on Union Branch, and the other on Long Swamp Creek are of the low-flow type and have little or no flood control capacity nor will they seriously alter flow characteristics of flood waters.

Toms River, Union Branch, Ridgeway Branch, and Long Swamp Creek are spanned forty-five times by bridges and culverts. Pertinent information on all bridges and culverts can be found in Table 7 on Page 19. Many of these bridges are obstructive to floodflows.

Flood damage reduction measures - There are no existing local or county zoning ordinances, building codes or other regulatory measures specifically for the reduction of flood damages. This study has been requested so that it may be used as a basis for development of flood plain management regulatory measures that are to be included in pending legislation by Ocean County. However, the State of New Jersey enacted an Encroachment Law in 1929 which is essentially a preventive flood loss measure. The law is known as the "1929 Encroachment Law (R.S. 58:1-26)" and is administered by the Division of Water Resources of the Department of Environmental Protection. The law reads in part as follows:

"No structure within the natural and ordinary high water mark of any stream shall be made by any public authority or private person or corporation without notice to the (Division) and in no case without



FIGURE 1 - The water level at Brook Road bridge over Union Branch is shown at the base of the roadway.



FIGURE 2 - Water level is at the underclearance of Beacon Street bridge over Union Branch.



FIGURE 3 - Water pouring over Pine Lake Dam on Union Branch



FIGURE 4 - Flood waters downstream of the Pine Lake Dam

complying with such conditions as the (Division) may prescribe for preserving the channel and providing for the flow of water therein to safeguard the public against danger from the waters impounded or affected by such a structure and this prohibition shall apply to any renewal of existing structures." (a)

Under the provision of this law, the Division issues permits for the construction of bridges, culverts, fills, walls, channel improvements, pipe crossings and other encroachments located within the natural and ordinary high water mark of the stream. Another New Jersey Encroachment Law [Chapter 229, Laws of 1938, amending a previous law known as R.S. 40:56-1], permits municipalities of the State to construct improvements, remove obstructions, define the location, establish widths, grades and elevations of any stream and to prevent encroachments thereon - subject to approval by the State, of the flood carrying capacity to be provided. Under this law, counties in New Jersey are permitted to assist municipalities in local flood damage alleviation programs. The New Jersey flood plain designation and marking law, enacted in 1962 [R.S. 58:16A (50-54)], empowers the Division of Water Resources to delineate and mark flood hazard areas and coordinate effectively the development, dissemination, and use of information on floods and flood damage that may be available. The development of adequate flood plain information furnished in this report will enable state and local authorities to further implement existing statutes and regulations.

Other factors and their impacts - The Toms River area is subject to fluvial flooding from Toms River and its tributaries and tidal flooding from Barnegat Bay. When high runoff from Toms River and its tributaries occurs during high tide stage in Barnegat Bay, it aggravates the flooding by increasing the height and duration of the river's backwater effect. Flooding and threats of flooding promote action by local officials in flood warning and flood fighting activities. Material stored and boats moored in the flood plain loom as adverse factors during floods.

Flood warning and forecasting - The National Weather Service Branch of the National Oceanic and Atmospheric Administration (NOAA) maintains year-round surveillance of weather conditions at Atlantic City, New Jersey. Commercial radio stations receive information from the National Weather Service and broadcast it to the public through the Emergency Weather Network in cooperation with the New Jersey Civil Defense Disaster Control (CD-DC). The State CD-DC also works closely with the National Weather Service, the agency responsible for tracking hurricanes and tornadoes. In times of emergency, the State CD-DC maintains close contact with county, local and civil defense offices through its own communications network.

Flood fighting and emergency evacuation plans - There are no formal flood fighting or emergency evacuation plans for Ocean County but provisions are made for alerting the news media, municipal officials, local police and fire departments, rescue squads, and the general populace through the Ocean County Civil Defense Office. In times of extreme emergencies, this Civil Defense Office coordinates local units in flood fighting, emergency evacuation, and rescue operations. During disasters, men and machines from the New Jersey State National Guard and nearby military installations render assistance to the local communities upon request.

(a) "Flood Damage Alleviation in New Jersey", Water Resources Circular No. 3, 1961, State of New Jersey Department of Environmental Protection.

Material storage on the flood plain - There is very little material stored on the flood plains in the upper reaches of Toms River. The lower reaches of Toms River are more industrially developed and there are large quantities of floatable materials stored on the flood plain such as lumber, crates and lightweight containers. There are also many small craft moored on Toms River and in yacht basins along the river. During time of floods, these floatable materials and small craft may be carried away by floodflows causing serious damage and additional hazards to life and property.

PAST FLOODS

Summary of Historical Floods

The highest stage of record for Toms River was estimated from a flood mark set in September 1938, but the actual gage reading was not available. The second highest stage was recorded in May 1968 and the third highest stage was recorded in August 1971. It is interesting to note that four of the five highest flows occurred within the last three years.

High tides on the Atlantic Ocean affect flooding on Toms River from its mouth in Barnegat Bay to a point approximately 4 miles upstream. Flooding due to high tides or a combination of high tides and floodflows occurred in September 1944, November 1950, and March 1962.

Flood Records

Information on historical floods in the Toms River area was obtained from the stream gaging station and the maximum tide height gage maintained by the U.S.G.S. in the Town of Toms River. Flood crest elevations from the Toms River gage are shown in Table 3. Precipitation records from the National Weather Service gage located at the Toms River Water Company are shown in Table 4. High water marks of past floods were obtained, residents in the area were interviewed, and newspaper files and historical documents were searched for information concerning past floods. Photographs of the March 1962 flood in Toms River were courteously provided by Mr. Fred Thornes of Toms River, New Jersey, and are shown in Figures 5 and 6 on Page 13.

TABLE 3
FLOOD CREST ELEVATIONS
Toms River, Near Toms River, New Jersey (a)

| Date of Crest | Estimated Peak Discharge cfs | Stage (c) feet | Elevation (d) feet - m.s.l.d. |
|--------------------|---------------------------------------|-------------------|----------------------------------|
| April 18, 1929 | 851 | 8.95 | 17.05 |
| August 26, 1933 | 835 | 8.86 | 16.96 |
| September 8, 1935 | 787 | 8.65 | 16.65 |
| March 14, 1936 | 739 | 8.30 | 16.40 |
| June 29, 1938 | 1,440(b) | 11.10 | 19.20 |
| July 26, 1938 | 1,060 | 10.15 | 18.25 |
| September 23, 1938 | 2,000(b) | 12.50 | 20.60 |
| February 5, 1939 | 808 | 8.73 | 16.83 |
| August 22, 1939 | 902 | 9.32 | 17.42 |
| September 17, 1944 | 1,140 | 10.58 | 18.68 |
| December 1, 1945 | 873 | 8.82 | 16.92 |
| December 31, 1945 | 763 | 8.17 | 16.27 |

TABLE 3 (Continued)
FLOOD CREST ELEVATIONS
Toms River, Near Toms River, New Jersey (a)

| <u>Date of Crest</u> | <u>Estimated Peak Discharge cfs</u> | <u>Stage (c) feet</u> | <u>Elevation(d) feet - m.s.l.d.</u> |
|----------------------|---|---------------------------|---|
| June 2, 1948 | 742 | 8.05 | 16.15 |
| June 2, 1949 | 816 | 8.48 | 16.58 |
| December 23, 1951 | 818 | 8.37 | 16.47 |
| April 29, 1952 | 1,250 | 10.53 | 18.63 |
| June 3, 1952 | 882 | 8.72 | 16.82 |
| March 15, 1953 | 878 | 8.70 | 16.80 |
| August 15, 1955 | 909 | 8.86 | 16.96 |
| February 2, 1958 | 1,160 | 10.09 | 18.19 |
| August 27, 1958 | 776 | 8.15 | 16.25 |
| October 28, 1958 | 941 | 9.03 | 17.13 |
| September 14, 1960 | 1,370 | 10.57 | 18.67 |
| August 15, 1961 | 938 | 8.95 | 17.05 |
| March 14, 1962 | 965 | 9.05 | 17.16 |
| September 23, 1966 | 808 | 3.27 | 16.37 |
| August 6, 1967 | 842 | 8.45 | 16.55 |
| May 31, 1968 | 1,610 | 11.30 | 19.40 |
| June 14, 1968 | 1,555 | 11.15 | 19.25 |
| July 31, 1969 | 1,510 | 11.03 | 19.13 |
| August 29, 1971 | 1,590 | 11.25 | 19.35 |

(a) U.S.G.S. Gage No. 4085, established October 1928

(b) Estimated discharge from flood mark.

(c) Bankfull stage is 8.0 feet.

(d) Mean sea level datum, 1929 General Adjustment Datum.

TABLE 4
PRECIPITATION AT TOMS RIVER, NEW JERSEY
(National Weather Service Gage at Toms River Water Company)(a)

| <u>Occurrence</u> | <u>Amount of Precipitation inches</u> | <u>Time Period hours</u> |
|--------------------|---|------------------------------|
| May 28-29, 1968 | 4.17 | 29 |
| August 27-28, 1971 | 5.19 | 14-½ |
| June 12-14, 1968 | 2.80 | 20 |
| July 27-30, 1969 | 7.78 | 18 |

(a) National Weather Service Gage No. 8816.

Flood Description

The following newspaper excerpts and photographs provide a vivid description of the flooding along Toms River caused by heavy precipitation and high tides.

25 November 1950 - This "Thanksgiving Day" flood inundated the low-lying lands encompassing Barnegat Bay and the mouth of Toms River. Flood tides driven by wind action caused damage to various marine facilities. Tidal heights experienced in southern Ocean County exceeded those at Toms River.

EXCERPTS FROM THE OCEAN COUNTY SUN,
25 NOVEMBER 1950 (a)

"Howling Gales and Flood Tides"
"Million Dollars Damage in Ocean County"
**"Island Heights Lost its 1,200ft. Boardwalk Erected
in 1949 at \$20,000- Total Damages Estimated at \$100,000"**

Toms River

"Dozens of Docks were Ripped Out
By Tides and Many Boats Were Sunk"

"Low Areas Were Submerged"

"Power Service for 80,000 of 113,000
Knocked Out"

6-7 March 1962 - This storm ravaged and almost obliterated the coast line of New Jersey. It caused such a great disaster that special reports on the damage were published by local newspapers.

Excerpts from a magazine entitled
"The Great March Storm - 1962," Published by the
Ocean County Sun

On March 6, a violent storm - perhaps the worst within memory - smashed the New Jersey coast line, rendering it helpless and almost unrecognizable. The storm brought to Ocean County a thick swirling snowfall, roaring winds, and towering seas.

Little of the exposed Ocean County coast line was spared damage as gale winds, wet snow, and thundering surf combined in an awesome display of elements in a murderous mood.

Inland

Even communities well away from the

coast were not spared completely from the storm ravages. Snow clogged county roads, and several thousand families lost electricity for varying periods.

In river front communities, such as Toms River, Beachwood, Island Heights, Pine Beach, and Ocean Gate, low streets were flooded and docks disappeared under water for several days as high winds kept extreme high tides from receding.

Sheltered marinas along the rivers were for the most part spared, but marinas in the open bay areas reported widespread damage to boats and equipment.

(a) Simulated from newspaper clippings.



FIGURE 5 - Flood of March 1962 at Toms River Boat Works.



FIGURE 6 - March 1962 flood at Toms River Boat Works. Note small boats stowed on the flood plain.

FUTURE FLOODS

Floods of the same or larger magnitude as those that have occurred in the past could occur in the future. Large floods have been experienced in the past on streams with similar geographical and physiographical characteristics as those found in the study area. Similar combinations of rainfall and runoff which caused these floods could occur in the Toms River area. Therefore, to determine the flooding potential of the study area, it was necessary to consider storms and floods that have occurred in regions of like topography, watershed cover and physical characteristics. Discussion of the future floods in this report is limited to those that have been designated as the Floodway Design Flood, the Flood Hazard Area Design Flood, and the Standard Project Flood. The estimates of the Floodway Design Flood, the Flood Hazard Area Design Flood, and the Standard Project Flood as presented in this report are based on the existing development of the watershed since future changes within the basin cannot be accurately predicted.

Floodway Design Flood and Flood Hazard Area Design Flood

The State of New Jersey defines "Floodway" as the channel and portion of the adjacent flood plain necessary to preserve the natural regimen of a stream for the reasonable passage of the Floodway Design Flood (FDF). "Flood Hazard Area" includes the Floodway and any additional portions of the flood plain inundated by the Flood Hazard Area Design Flood (FHADF).

Both of these design floods are used extensively by the State of New Jersey for flood plain management programs. The method used for determination of these floods is described in the "New Jersey Flood Hazard Report No. 1, Delineation of Flood Hazard Areas". This method applies "multiples" to the mean annual flood as determined from a regional analysis presented in the New Jersey Water Resources Circular No. 13, "Floods in New Jersey: Magnitude and Frequency". The circular was prepared in 1964 by the U.S. Geological Survey in cooperation with the State of New Jersey. Certain modifications were made to these results which reflect the 43 years of record from the U.S. Geological Survey gage. Peak flows developed for the Floodway Design Flood and the Flood Hazard Area Design Flood are given in Table 5. Since the State of New Jersey's criteria is not strictly defined for small drainage areas, the peak flows for Long Swamp Creek are only listed near the mouth.

The lack of Barnegat Bay tide data, only seven years of record and several high water marks, precluded a precise determination of tidal stage-frequency relationships for Toms River; however, using the gage data available from the Atlantic City, U.S.G.S. gaging station, pertinent information was developed. The estimated height of a 100-year tidal event is +6.6 feet, mean sea level datum. The 100-year tide is defined as one that occurs once in 100 years on the average, although it could occur in any year. This 100-year tide has approximately the same chance of occurrence as the Floodway Design flood in the Toms River Area.

Standard Project Flood

The Standard Project Flood is defined as a major flood that can be expected to occur from a severe combination of meteorological and hydrological conditions that is considered reasonably characteristic of the geographical area in which the study area is located, excluding extremely rare combinations. The Corps of Engineers, in cooperation with the NOAA Weather Service, has made comprehensive studies and investigations based on the past records of experienced storms and floods, and has developed generalized procedures for estimating the flood potential of streams. As in the case of estimating the 100-year tide, gage data available from the Atlantic City gage was used in the determination of a Standard Project Tide.

Peak discharges for the Floodway Design Flood, the Flood Hazard Area Design Flood, and the Standard Project Flood at selected locations in the study area are shown in Table 5. Discharge hydrographs for the Standard Project Flood at the U.S. Geological Survey gage on Toms River, at the mouth of Union Branch, and at the mouth of Ridgeway Branch are shown on Plate 19. The relative flood heights of the Intermediate Regional Tide, Floodway Design Flood, Standard Project Flood, and other recorded floods are shown in Table 6.

TABLE 5
PEAK FLOWS FOR FLOODWAY DESIGN, FLOOD HAZARD AREA DESIGN
AND STANDARD PROJECT FLOODS

| Location | River Mile | Drainage Area Sq. Mi | Floodway Design Flood Discharge cfs | Flood Hazard Area Design Flood Discharge cfs | Standard Project Flood Discharge cfs |
|---|---------------|----------------------------|--|--|---|
| <u>At Mouth</u> | 0.0 | 188.5 | (a) | (a) | (a) |
| Downstream of Confluence with Wrangle Brook | 4.7 | 162.2 | 3,900 | 5,100 | 15,300 |
| Upstream of Confluence with Wrangle Brook | 4.7 | 128.8 | 3,100 | 4,000 | 10,800 |
| At U.S.G.S. Gage | 8.8 | 124.0 | 2,800 | 3,600 | 10,500 |
| Downstream of Confluence with Union Branch | 10.6 | 117.0 | 2,800 | 3,600 | 10,100 |
| Upstream of Confluence with Union Branch | 10.6 | 56.0 | 1,800 | 2,300 | 4,600 |
| <u>Long Swamp Creek Tributary</u> | | | | | |
| Near Mouth | 0.0 | 6.3 | 640(a) | 800(a) | 1,500(a) |
| <u>Union Branch Tributary</u> | | | | | |
| At Mouth | 0.0 | 61.0 | 1,000 | 1,300 | 5,500 |

TABLE 5 (Continued)
PEAK FLOWS FOR FLOODWAY DESIGN, FLOOD HAZARD AREA DESIGN
AND STANDARD PROJECT FLOODS

| Location | River Mile | Drainage Area Sq. Mi | Floodway Design Flood Discharge cfs | Flood Hazard Area Design Flood Discharge cfs | Standard Project Flood Discharge cfs |
|---|-----------------------|-------------------------------------|--|---|---|
| Downstream of Con- fluence with Ridge- way Branch | 2.1 | 59.7 | 950 | 1,125 | 5,000 |
| Upstream of Conflu- ence with Ridgeway Branch | 2.1 | 27.9 | 500 | 585 | 2,000 |
| <u>Ridgeway Branch</u> | | | | | |
| At the Mouth | 0.0 | 31.8 | 450 | 540 | 3,000 |
| N.J. Highway Rt. 547 | 4.5 | 27.2 | 400 | 500 | 2,500 |

(a) Heights of flooding are governed by tides in lower reaches of Toms River and Long Swamp Creek.

TABLE 6
RELATIVE FLOOD HEIGHTS ON TOMS RIVER AND UNION BRANCH

| Flood | River Mile | Estimated Peak Discharge cfs | Referenced Flood Elevation (d) feet-msld | Height Above Referenced Flood Feet |
|--------------------------|-----------------------|---|---|---|
| <u>Toms River</u> | | | | |
| November 25, 1950 | 3.4 | (a) | 5.6 | 0.0 |
| Intermediate Regional | | (b) | | 1.0 |
| (100 Year Tide) | | | | |
| Standard Project Tide | | (b) | | 5.4 |
| November 25, 1950 | 3.9 | (a) | 5.9 | 0.0 |
| Floodway Design | | 4,000 | | 1.0 |
| Standard Project Tide | | (b) | | 5.1 |
| May 31, 1968 | 5.37 | — | 6.4 | 0.0 |
| Floodway Design | | 3,100 | | 4.6 |
| Standard Project | | 10,800 | | 10.8 |
| May 31, 1968 | 6.29 | — | 9.0 | 0.0 |
| Floodway Design | | 3,100 | | 5.4 |
| Standard Project | | 10,800 | | 11.1 |
| May 31, 1968 | 8.85 | 1,610 | 19.4 | 0.0 |
| Floodway Design | Gage | 2,800 | | 1.4 |
| Standard Project | | 10,150 | | 7.3 |
| September 23, 1938 | 8.85 | 2,000 (c) | 20.6 | 0.0 |
| Floodway Design | Gage | 2,800 | | 0.2 |
| Standard Project | | 10,150 | | 6.1 |
| May 31, 1968 | 10.9 | — | 25.9 | 0.0 |
| Floodway Design | | 1,800 | | 3.6 |
| Standard Project | | 4,600 | | 7.8 |

TABLE 6 (Continued)
RELATIVE FLOOD HEIGHTS ON TOMS RIVER AND UNION BRANCH

| Flood | River Mile | Estimated Peak Discharge cfs | Referenced Flood Elevation (d) feet-msld | Height Above Referenced Flood feet |
|----------------------------|-----------------------|---|---|---|
| <u>Union Branch</u> | | | | |
| May 31, 1968 | 1.51 | | 30.5 | 0.0 |
| Floodway Design | | 960 | | 0.6 |
| Standard Project | | 5,400 | | 6.6 |

(a) High stage affected by storm tide and stream flow combination.
 (b) Tide causes higher stage than stream flow.
 (c) Discharge estimated by extrapolation of stream gage rating curve.
 (d) Mean sea level datum, 1929 General Adjustment Datum

Frequency

A frequency curve of flow versus recurrence interval was constructed on the basis of computed flows up to and including the Floodway Design Flood. The frequency curve thus derived, which is available on request, reflects the judgment of engineers who have studied the area and are familiar with the region; however, it must be regarded as approximate and should be used with caution in connection with any planning of flood plain use. Floods larger than the Standard Project Flood are possible but the combination of factors necessary to produce such large flows would be extremely rare.

Hazards of Large Floods

The extent of damage caused by any flood depends on the topography of the area flooded, depth and duration of flooding, velocity of flow, rate of rise, and developments in the flood plain. Flood stages on Toms River would result in inundation of many low-lying commercial and residential areas. Deep floodwater flowing at high velocity and carrying floating debris would create conditions hazardous to persons and vehicles attempting to cross flooded areas. In general, floodwater three or more feet deep and flowing at a velocity of three or more feet per second could easily sweep an adult person off his feet, thus creating definite danger of injury or drowning. Rapidly rising and swiftly flowing floodwater may trap persons in homes that are ultimately destroyed, or in vehicles that are ultimately submerged or floated. Water lines can be ruptured by deposits of debris and the force of floodwaters, thus creating the possibility of contaminated domestic water supplies. Damaged sanitary sewer lines could result in the pollution of floodwaters creating health hazards. Isolation of areas by floodwater could create hazards in terms of medical, fire or law enforcement emergencies.

Flooded areas and flood damages - The study areas in Ocean County that would be inundated by the Standard Project Flood on Toms River are shown on Plate 2, which is also an index map to Plates 3 through 13. Plates 3 through 13 show in detail the areas that would be flooded by the Floodway Design, Flood Hazard Area Design, and Standard Project Floods. Some plates show flooded area outlines that only delineate the Floodway Design and Standard Project Floods, as the Flood Hazard Area Design Flood would not be readily distinguishable from the Floodway Design Flood. The actual limits of these overflow

areas may vary from those shown on the maps because the 10-foot contour interval and scale of the maps do not permit precise plotting of the flooded area boundaries. As may be seen from these plates, large portions of the communities on Toms River between its mouth and the Garden State Parkway would be inundated by large floods. The highest flood stages would result from a combination of fluvial flooding from Toms River and peak tides on Barnegat Bay although fluvial and tidal flooding may occur independently. Note that a portion of Island Heights would be isolated by a Standard Project Tide. The Floodway Design Flood, the Flood Hazard Area Design Flood and the Standard Project Flood on Union and Ridgeway Branches would also inundate areas of Pine Lake Park. Areas flooded by the Floodway Design, Flood Hazard Area Design, and Standard Project Floods include recreational areas, commercial and industrial properties and the associated streets, roads, and utilities. Considerable damage to these facilities would occur during a Floodway Design Flood. Due to its wider extent, greater depths, higher velocities, and longer duration, the Standard Project Flood will cause more severe damage than either the Floodway Design Flood or the Flood Hazard Area Design Flood. Plates 14 and 15 show water surface profiles for the Floodway Design, Flood Hazard Area Design, and Standard Project Floods on Toms River, Union Branch, and Ridgeway Branch. Plate 16 indicates water surface profiles on Long Swamp Creek for the Floodway Design and Standard Project Floods only, as the increase in flood heights between the Floodway Design and Flood Hazard Area Design Floods is relatively small for this tributary. Depths of flow in the channel can be estimated from these profiles. Typical cross sections of the flood plain at selected locations, together with the water surface elevation and lateral extent of the various design floods, are shown on Plates 17 and 18.

Obstructions - During floods, debris collecting on bridges and culverts could decrease their carrying capacity and cause greater water depths (backwater effect) upstream of these structures. Since the occurrence and amount of debris are indeterminate factors, only the physical characteristics of the structures were considered in preparing profiles of the Floodway Design, Flood Hazard Area Design and Standard Project Floods. Similarly, the maps of flooded areas show the backwater effect of obstructive bridges and culverts, but do not reflect increased water surface elevation that could be caused by debris collecting against the structures, or by deposition of silt in the stream channel under structures. As previously indicated, there are two dams within the study area which have no flood control capacities nor will they seriously alter flow characteristics of floodwaters. Of the forty-five bridges and culverts crossing the streams in the study area, most of them are obstructive to the Floodway Design Flood and Flood Hazard Area Design Flood and even more are obstructive to the Standard Project Flood. In some cases bridges may be high enough so as not to be inundated by floodflows; however, the approaches to these bridges may be at lower elevations and subject to flooding and rendered impassable. Table 7 lists water surface elevations at selected bridges and culverts that may be restrictive during floodflows.

TABLE 7
ELEVATION DATA
Bridges Across Toms River, Union & Ridgeway Branches and
Long Swamp Creek

| Identification | Mileage Above Mouth | Underclearance Elevation feet-msld | Water Surface Elevation(a) | | |
|-------------------------------|---------------------------|--|-----------------------------|--------------------------------------|------------------------------|
| | | | Floodway Design Flood | Flood Hazard Area Design Flood | Standard Project Flood |
| | | | feet-msld | feet-msld | feet-msld |
| <u>Main Branch Toms River</u> | | | | | |
| N.J. Rt. 166 | 3.96 | 5.6 | 7.9 | 8.4 | 11.6 |
| Main Street | 3.98 | 4.4 | 8.0 | 8.6 | 11.9 |
| Central R.R. of N.J. | 4.04 | 3.9 | 8.1 | 8.7 | 12.2 |
| Garden State Parkway | 4.59 | 12.8 | 8.8 | 9.5 | 13.3 |
| Central R.R. of N.J. | 4.80 | 3.5 | 9.3 | 10.1 | 14.2 |
| Water St. | 5.38 | 12.9 | 11.0 | 12.0 | 17.2 |
| N.J. Rt. 37 | 6.30 | 9.3 | 14.4 | 15.6 | 20.4 |
| Oak Ridge Parkway | 8.85 | 20.6 | 20.8 | 21.8 | 26.8 |
| Toms River-Ridgeway Rd. | 10.91 | 26.2 | 29.2 | 30.0 | 33.7 |
| N.J. Rt. 70 | 13.80 | 49.9 | 47.0 | 47.8 | 51.1 |
| <u>Union Branch</u> | | | | | |
| Tenth St. | 0.99 | 26.7 | 30.3 | 31.0 | 35.7 |
| Tenth St. | 1.05 | 27.2 | 30.5 | 31.1 | 36.1 |
| Commonwealth Blvd | 1.20 | 29.6 | 30.7 | 31.5 | 36.6 |
| Beacon St. | 1.51 | 28.9 | 31.2 | 32.0 | 37.1 |
| Colonial Dr. | 4.96 | 47.3 | 46.1 | 46.6 | 50.2 |
| N.J. Rt. 37 | 5.26 | 50.3 | 49.3 | 49.8 | 53.1 |
| Wrangle Brook Rd. | 5.43 | 50.0 | 51.5 | 51.8 | 54.5 |
| Central R.R. of N.J. | 5.76 | 56.6 | 53.0 | 53.4 | 55.9 |
| Abandoned R.R. | 5.87 | 56.6 | 54.2 | 54.6 | 56.9 |
| Central R.R. of N.J. | 5.94 | 59.9 | 55.2 | 55.7 | 57.9 |
| Brook Rd. | 6.21 | 55.0 | 57.2 | 57.5 | 59.6 |
| Lake Rd. | 6.34 | 62.5 | 58.4 | 58.7 | 60.3 |
| <u>Ridgeway Branch</u> | | | | | |
| N.J. Rt. 70 | 1.84 | 44.4 | 39.6 | 39.9 | 44.1 |
| Central R.R. of N.J. | 3.32 | 60.8 | 48.5 | 48.7 | 51.7 |
| Lakehurst Rd. | 3.82 | 54.0 | 50.2 | 50.4 | 53.9 |
| N.J. Rt. 547 | 4.51 | 55.7 | 55.2 | 55.6 | 58.3 |
| <u>Long Swamp Creek</u> | | | | | |
| Washington St. | 0.32 | 11.1 | 12.5 | | 13.5 |
| N.J. Rt. 37 | 0.45 | 13.9 | 16.0 | | 18.0 |
| Batchelor St. | 0.51 | 13.3 | 18.0 | | 19.0 |
| Bridle Path Bridge | 0.66 | 14.3 | 18.5 | | 19.5 |
| Private Rd. | 0.90 | 17.7 | 20.0 | | 21.0 |
| Private Rd. | 1.02 | 17.6 | 21.5 | | 22.7 |
| Dave Marion Rd. | 1.23 | 21.0 | 23.5 | | 24.0 |
| Cedar Grove Rd. | 1.42 | 23.9 | 27.0 | | 28.5 |
| Lester Dr. | 1.71 | 25.0 | 27.0 | | 30.5 |
| Hooper Ave. | 2.31 | 31.5 | 37.0 | | 37.7 |
| Bey Lea Rd. (b) | 2.82 | 40.0 | 42.3 | | 43.2 |

(a) Mean sea level datum

(b) The minor culverts & bridges within the Bey Lea Golf Course are not listed

Velocities of flow - Velocities of flood waters depend largely on the size and shape of the stream cross section, slope of the stream, and physical condition of the stream bed, all of which vary on different streams and at different locations on the same stream. Table 8 shows the average channel and overbank velocities for the Floodway Design Flood and the Standard Project Flood at selected locations.

TABLE 8
MAXIMUM AVERAGE VELOCITIES
Toms River, Union & Ridgeway Branches & Long Swamp Creek

| Location | Mileage Above Mouth | Channel Velocity | | Overbank Velocity (a) | |
|--------------------------------------|---------------------------|-----------------------------|------------------------------|-----------------------------|------------------------------|
| | | Floodway Design Flood | Standard Project Flood | Floodway Design Flood | Standard Project Flood |
| | | feet per second | | feet per second | |
| <u>Main Branch Toms River</u> | | | | | |
| Downstream of N.J. Rt. 166 | 3.9 | 2.5 | 5.1 | 0.4 | 0.7 |
| Downstream of Water St. | 5.4 | 3.1 | 4.8 | 0.4 | 0.9 |
| Cross Section No.7 | 7.7 | 1.9 | 3.1 | 0.3 | 0.6 |
| Cross Section No.11 | 11.0 | 2.6 | 3.2 | 0.3 | 0.5 |
| Cross Section No.14 | 13.8 | 2.9 | 4.2 | 0.3 | 0.6 |
| <u>Union Branch</u> | | | | | |
| Downstream of 10th St. | 0.98 | 2.2 | 3.8 | 0.3 | 0.6 |
| Upstream of N.J. Rt. 37 | 5.3 | 2.0 | 2.7 | 0.1 | 0.3 |
| <u>Ridgeway Branch</u> | | | | | |
| Cross Section No.25 | 2.72 | 1.7 | 2.4 | 0.2 | 0.4 |
| Cross Section No.27 | 4.46 | 1.8 | 2.9 | 0.3 | 0.6 |
| <u>Long Swamp Creek</u> | | | | | |
| Downstream of N.J. Rt. 37 | 0.44 | 1.5 | 2.6 | 0.4 | 0.6 |
| Downstream of Lester Dr. | 1.67 | 0.9 | 2.9 | 0.1 | 0.3 |

(a) Velocity given is the greater of the left and right overbank value

(a) Velocity given is the greater of the left and right overbank value

Rates of rise and duration of flooding - Floods generally rise slowly and stay out of the banks for long periods of time. On Toms River, the maximum recorded duration of flooding above critical stage has lasted ninety hours. For selected historic floods and the Standard Project Flood at the U.S.G.S. Gage on Toms River, Table 9 gives the maximum rate of rise (from critical stage level to maximum floodflow level), time of rise (time period corresponding to height of rise), and duration of critical stage (period of time flooding is above critical stage level).

TABLE 9
RATES OF RISE AND DURATION
(U.S.G.S. Gage on Toms River)(a)

| Flood | Maximum Rate of Rise ft/hr | Height of Rise ft | Time of Rise hrs | Duration of Critical Stage hrs |
|------------------------|---|--------------------------------------|-------------------------------------|---|
| September 23, 1938 | 0.4 | 4.5 | 37 | 90 |
| May 30, 1968 | 1.0 | 3.3 | 16 | 62 |
| June 13, 1968 | 0.6 | 3.2 | 23 | 71 |
| July 29, 1969 | 0.7 | 3.0 | 39 | 88 |
| Standard Project Flood | 1.9 | 10.6 | 17 | 114 |

(a) The gage datum is 8.1 feet, mean sea level datum. The critical stage elevation is 16.1 feet, mean sea level datum.

Photographs, future flood heights - The levels that the Floodway Design Flood, the Flood Hazard Area Design Flood and the Standard Project Flood are expected to reach at various locations along Toms River are indicated on the following photographs.



FIGURE 7 - Future flood heights at Toms River Boat Works



FIGURE 8 - Future flood heights at the New Jersey Central Railroad bridge in Toms River, New Jersey

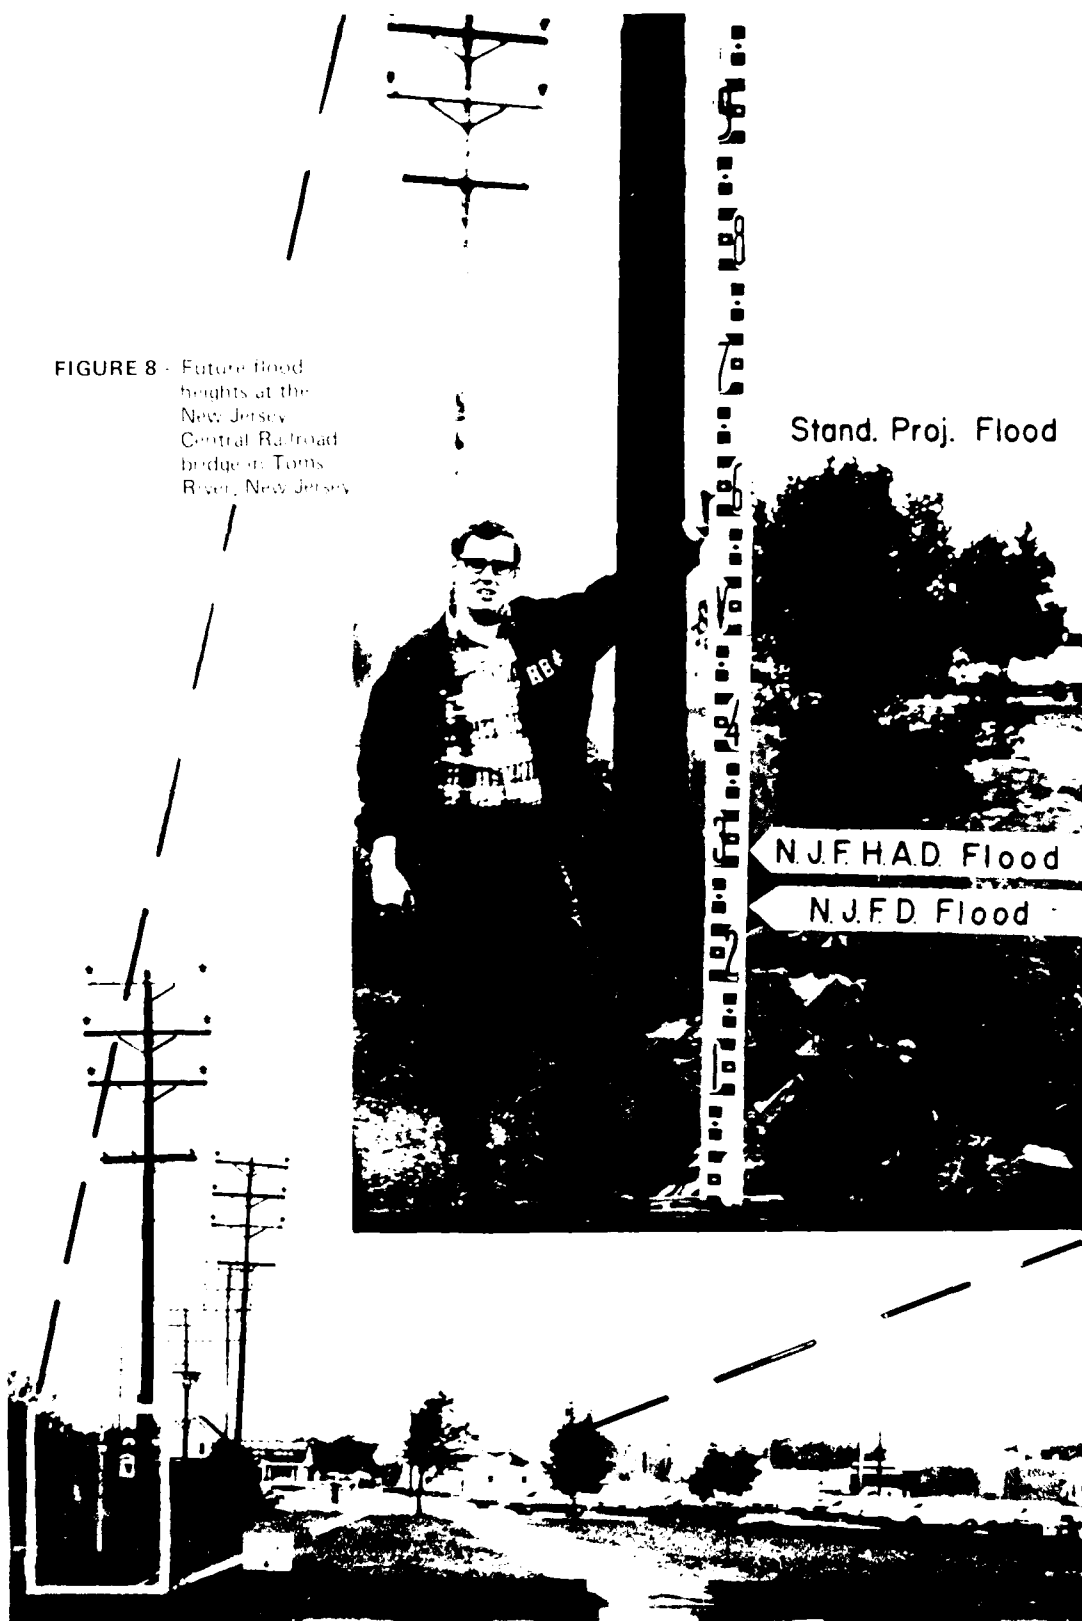




FIGURE 9 - Future flood heights at the Travel Lodge Motel in Toms River, New Jersey



FIGURE 10 - Future flood heights at Brook Road along Union Branch

GLOSSARY

Backwater. The resulting high water surface in a given stream due to a downstream obstruction or high stages in an intersecting stream.

Flood. An overflow of lands not normally covered by water and that are used or usable by man. Floods have two essential characteristics: The inundation of land is temporary; and the land is adjacent to and inundated by overflow from a river, stream, ocean, lake, or other body of standing water.

Normally a "flood" is considered as any temporary rise in streamflow or stage, but not the ponding of surface water, the results in significant adverse effects in the vicinity. Adverse effects may include damages from overflow of land areas, temporary backwater effects in sewers and local drainage channels, creation of unsanitary conditions or other unfavorable situations by deposition of materials in stream channels during flood recessions, rise of ground water coincident with increased streamflow, and other problems.

Flood Crest. The maximum stage or elevation reached by the waters of a flood at a given location.

Flood Hazard Area Design Flood. A flood greater than the Floodway Design Flood that inundates the Floodway and additional portions of the flood plain. This area is known as the Flood Hazard Area. The Floodway (see Floodway Design Flood) is an integral part of the Flood Hazard Area. This flood is also used extensively by the State of New Jersey for planning purposes.

Flood Plain. The areas adjoining a river, stream, watercourse, ocean, lake, or other body of standing water that have been or may be covered by floodwater.

Flood Profile. A graph showing the relationship of water surface elevation to location, the latter generally expressed as distance above mouth for a stream of water flowing in an open channel. It is generally drawn to show surface elevation for the crest of a specific flood, but may be prepared for conditions at a given time or stage.

Flood Stage. The stage or elevation at which overflow of the natural banks of a stream or body of water begins in the reach or area in which the elevation is measured.

Floodway Design Flood. A flood that inundates the channel and portions of the adjacent flood plain necessary for the reasonable passage of flood waters. This area is known as the Floodway and represents the minimum area of the flood plain required for passage of flood waters without aggravating flood conditions upstream or downstream. This flood is used extensively by the State of New Jersey for planning purposes. In the hydrologic region which includes the Toms River watershed, the Floodway Design Flood has an average frequency of occurrence of once in 100 years. (See also: Flood Hazard Area Design Flood).

Hurricane. An intense cyclonic windstorm of tropical origin in which winds tend to spiral inward in a counterclockwise direction toward a core of low pressure, with maximum surface wind velocities that equal or exceed 75 miles per hour (65 knots) for several minutes or longer at some points. Tropical storm is the term applied if maximum winds are less than 75 miles per hour.

Hydrograph. A graph showing flow values against time at a given point, usually measured in cubic feet per second. The area under the curve indicates total volume of flow.


Intermediate Regional Tide. A high tide having a frequency of occurrence in the order of once in 100-years, although the tide may occur in any year. The tide elevation is based on statistical analyses of tide records applicable to the study area.

Left Bank. The bank on the left side of a river, stream, or watercourse, looking downstream.

Right Bank. The bank on the right side of a river, stream, or watercourse, looking downstream.

Standard Project Flood. The flood that may be expected from the most severe combination of meteorological and hydrological conditions that are considered reasonably characteristic of the geographical area in which the drainage basin is located, excluding extremely rare combinations. Peak discharges for these floods are generally about 40-60 percent of the Probable Maximum Floods for the same basins. As used by the Corps of Engineers, Standard Project Floods are intended as practicable expressions of the degree of protection that should be sought in the design of flood control works, the failure of which might be disastrous.

Underclearance Elevation. The elevation at the top of the opening of a culvert, or other structure through which water may flow along a watercourse.

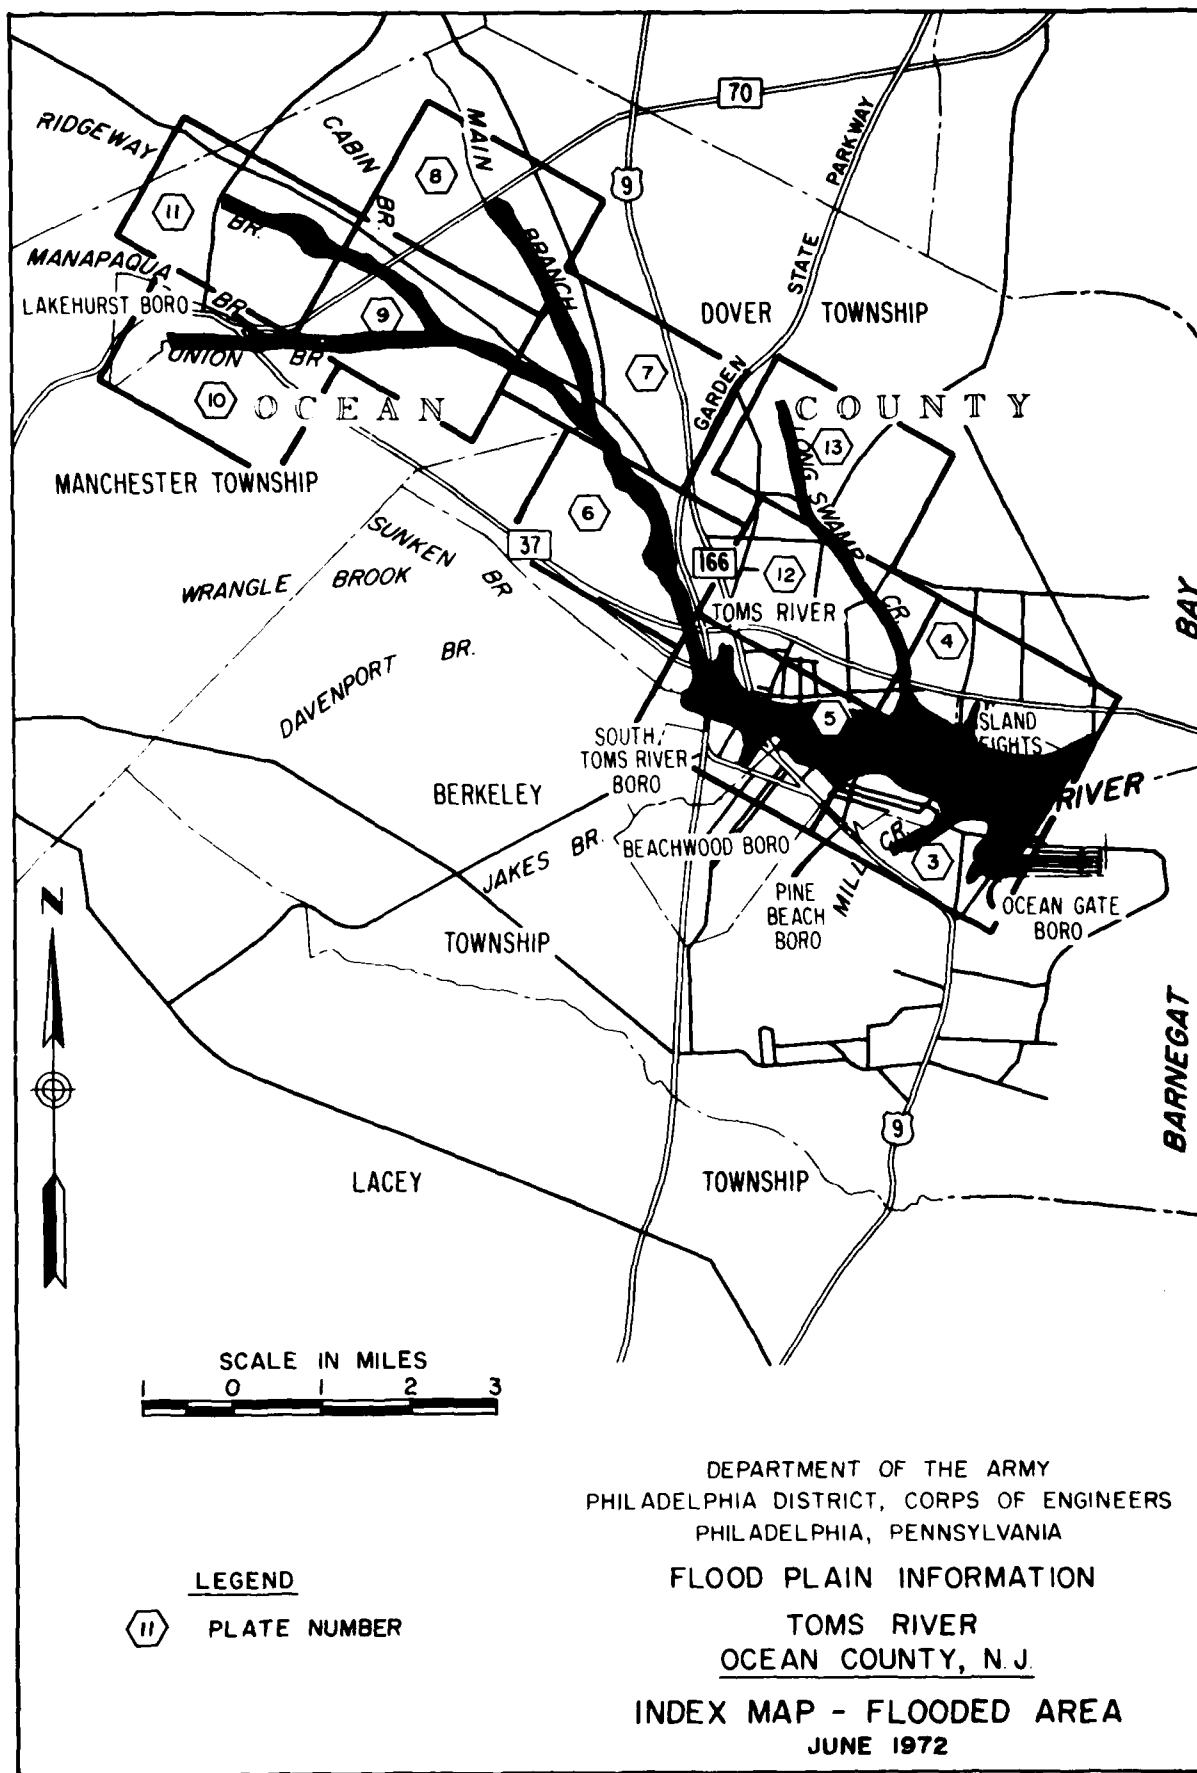

MATCH

LINE

PLATE

4

RIVER

TOMS

M + 2

FLOW

RIVERSIDE DRIVE

AVE.

STATION

2

AVE.

AVE.

AVE.

PINE BEACH

PROSPECT

SPRINGFIELD

PENNSYLVANIA

MOTOR

RD.

BERKEI

9

5

PLATE

LINE

MATCH

M + 1

M + 1

2


NOTES

1. MAP BASED SHEET TO ADDITIONS CORPS OF
2. LIMITS OF FROM ACTU EXPLAINED
3. AREAS OUT SUBJECT T
4. MINIMUM C

0


DEPI
PHILADELPHI
PHILAE
FLOOD

OC
F

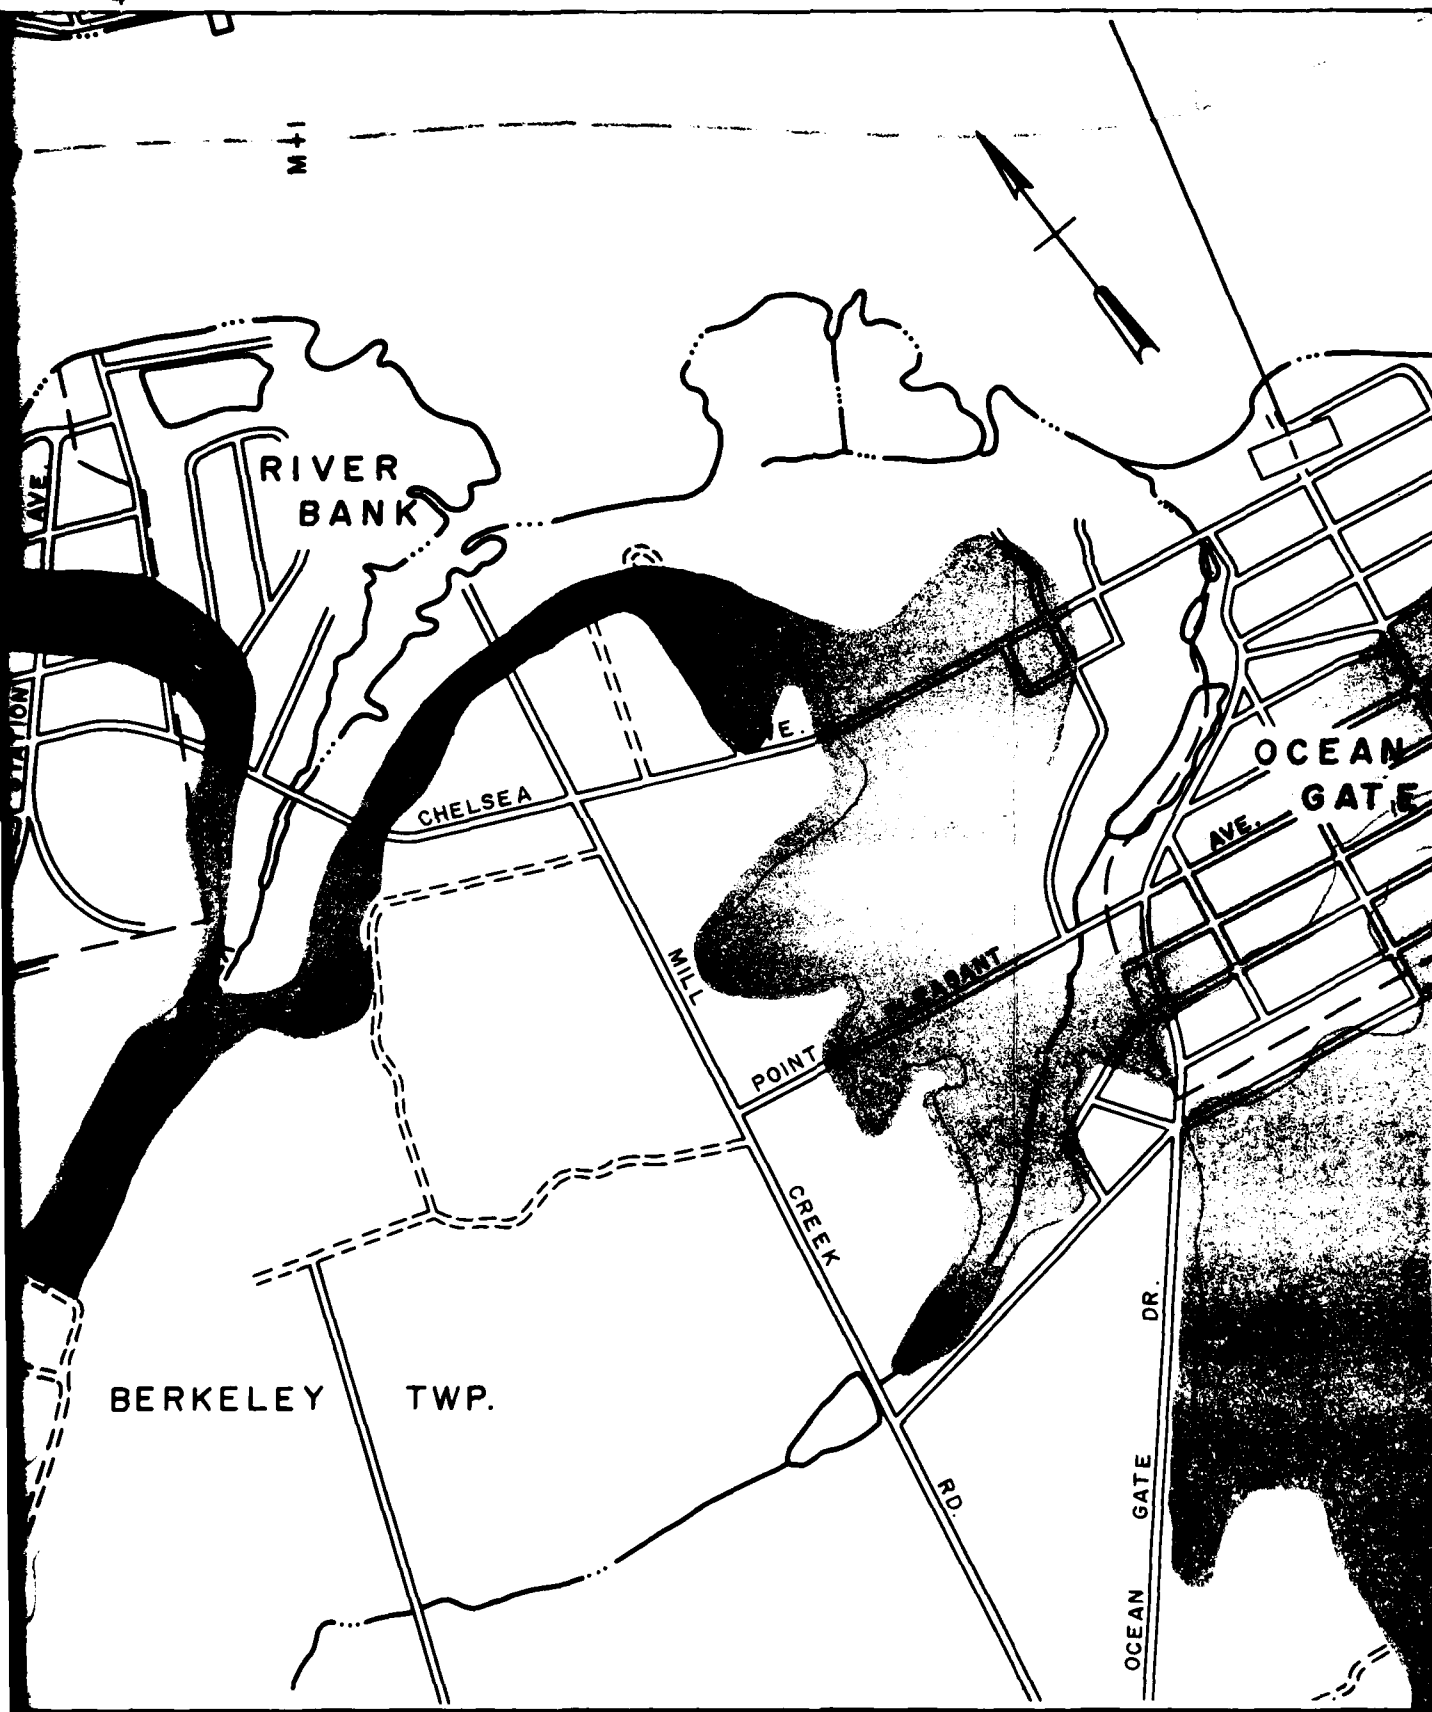

LEGEND

OVERFLOW LIMITS



M + 1 MILES ABOVE MOUTH

2 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM
TOWNSHIP OR BORO LIMITS

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.


SCALE IN FEET



DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.
FLOODED AREAS

JUNE 1972

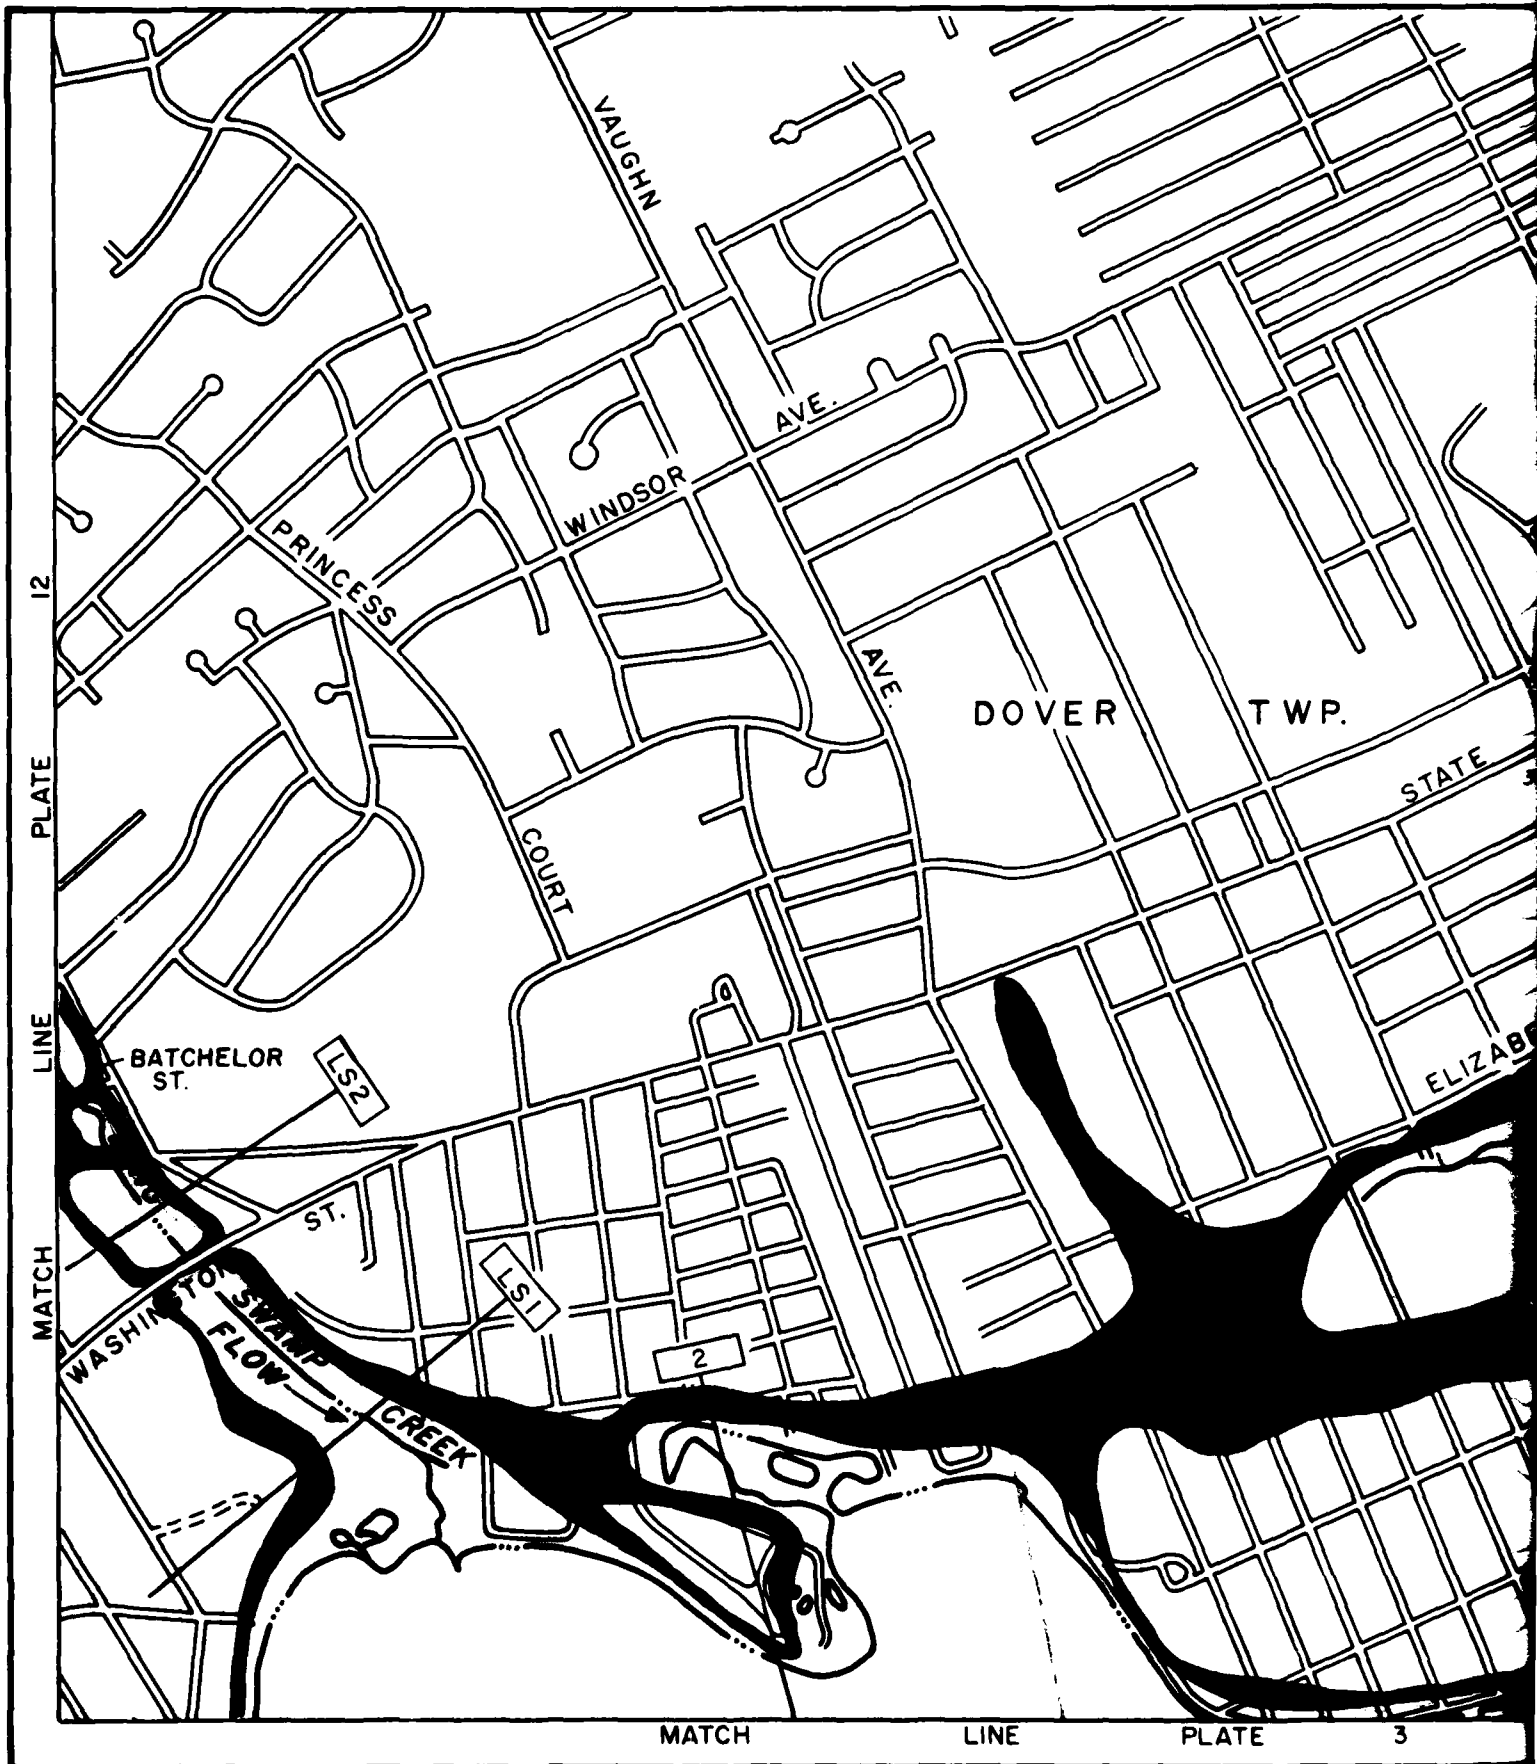




LS 1

NOTES

1. MAP BASED SHEET TOM ADDITIONS CORPS OF E
2. LIMITS OF FROM ACTU EXPLAINED
3. AREAS OUT SUBJECT TO
4. MINIMUM CO

DEPA
PHILADELPHIA
PHILAD
FLOOD

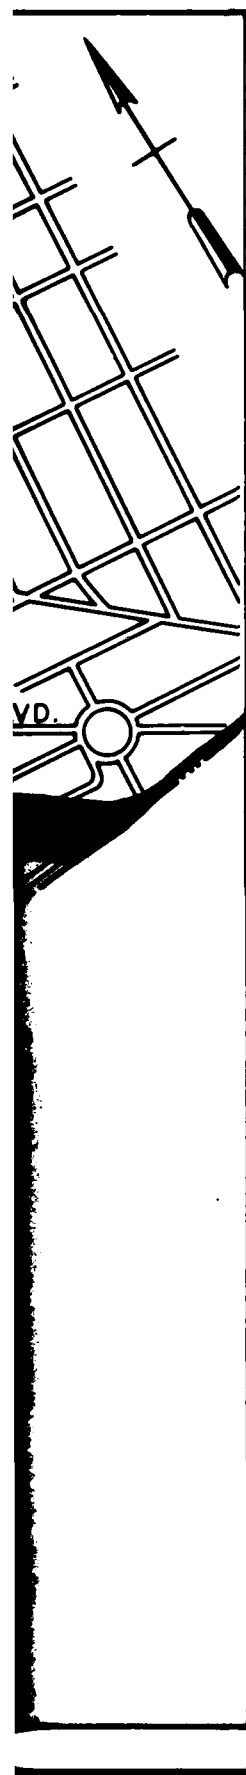

LEGEND

OVERFLOW LIMITS



LS I CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

TOWNSHIP OR BORO LIMITS

CHANNEL

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.





DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLOODED AREAS

JUNE 1972

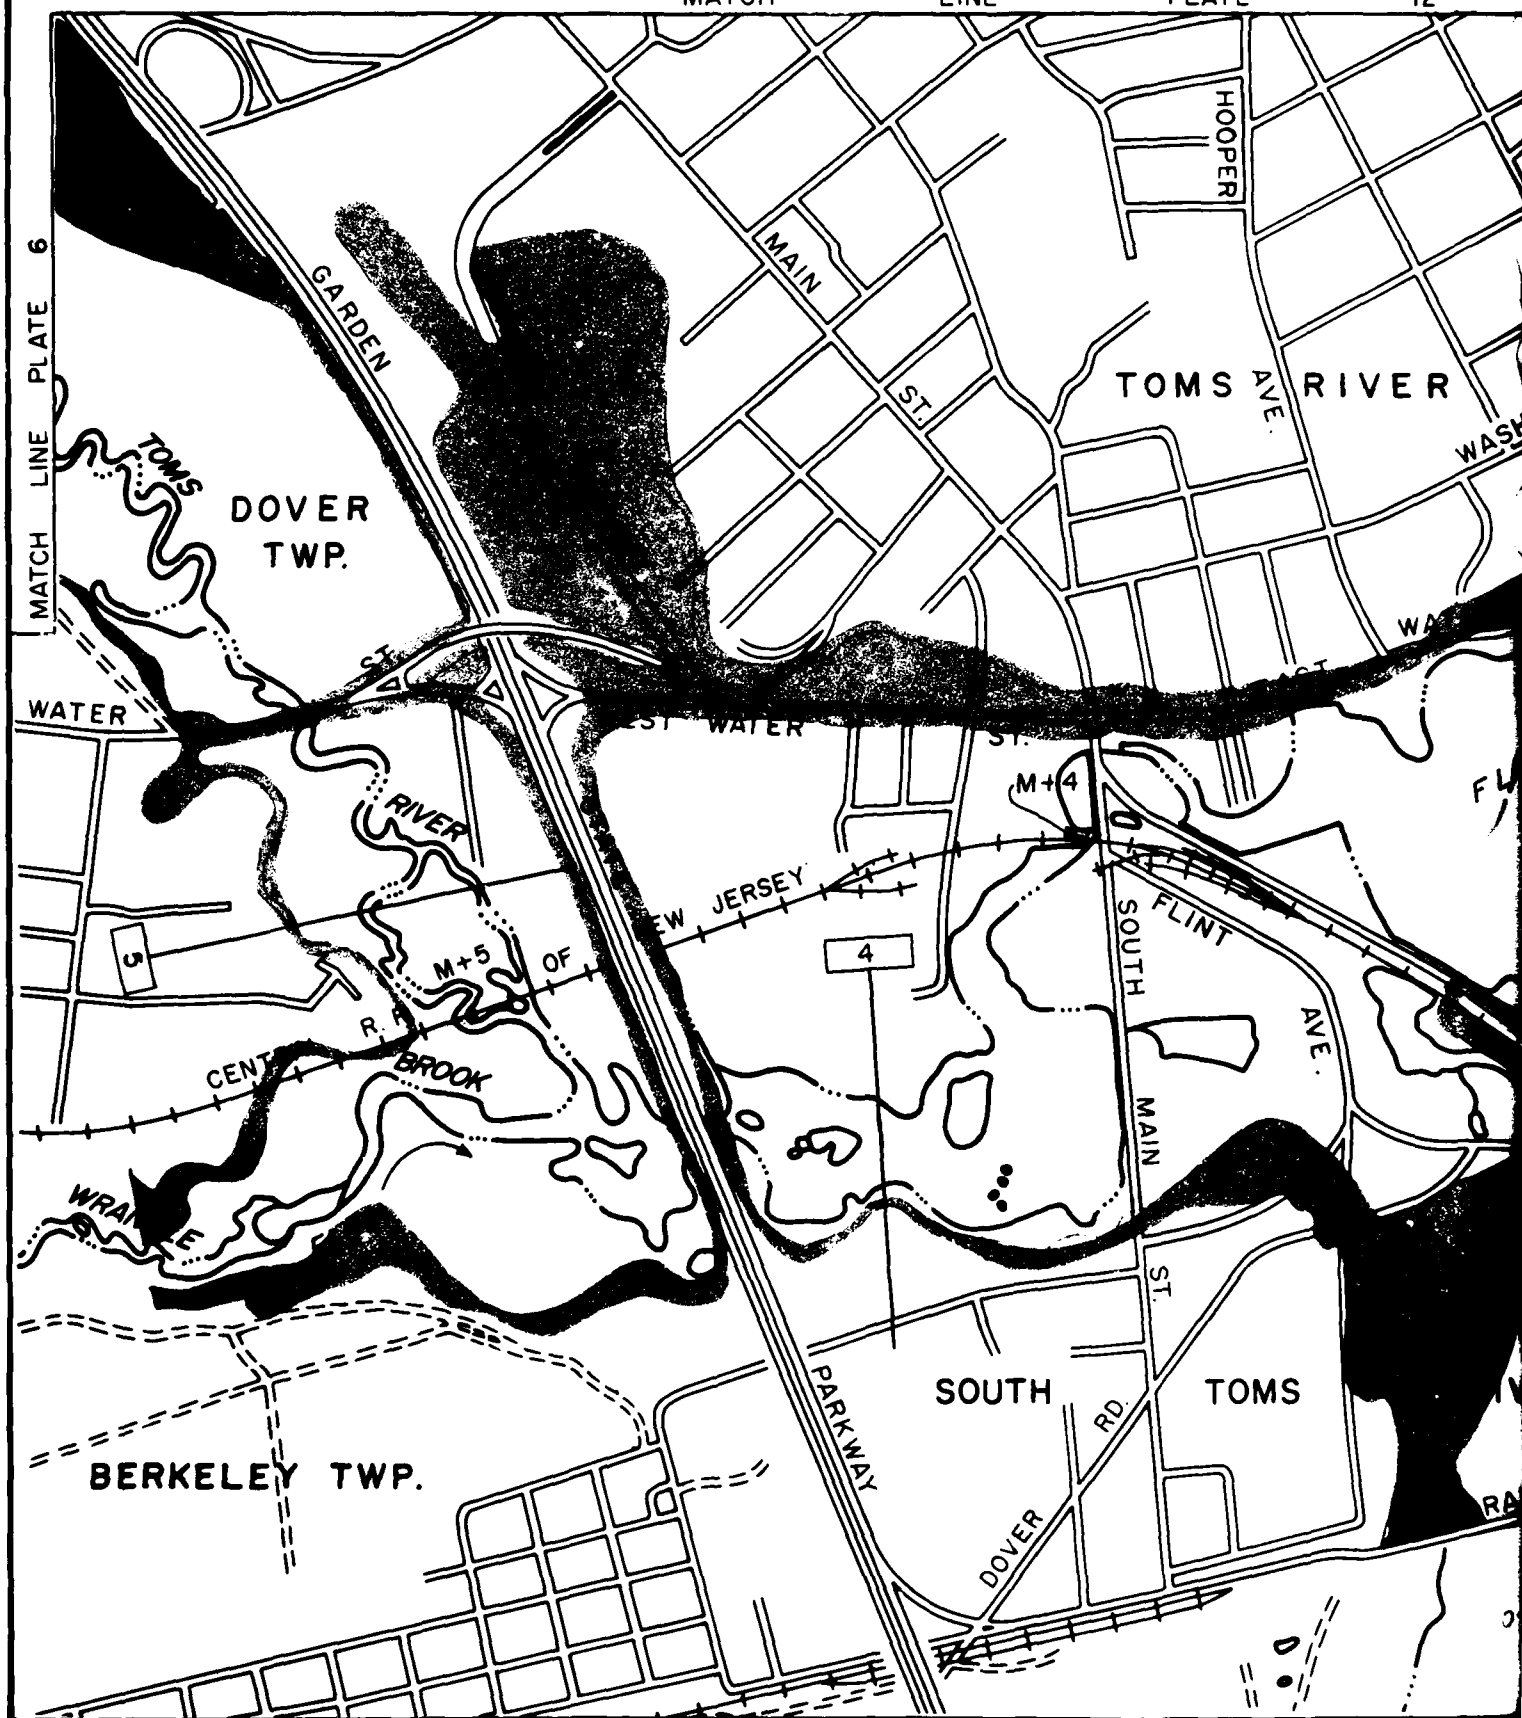

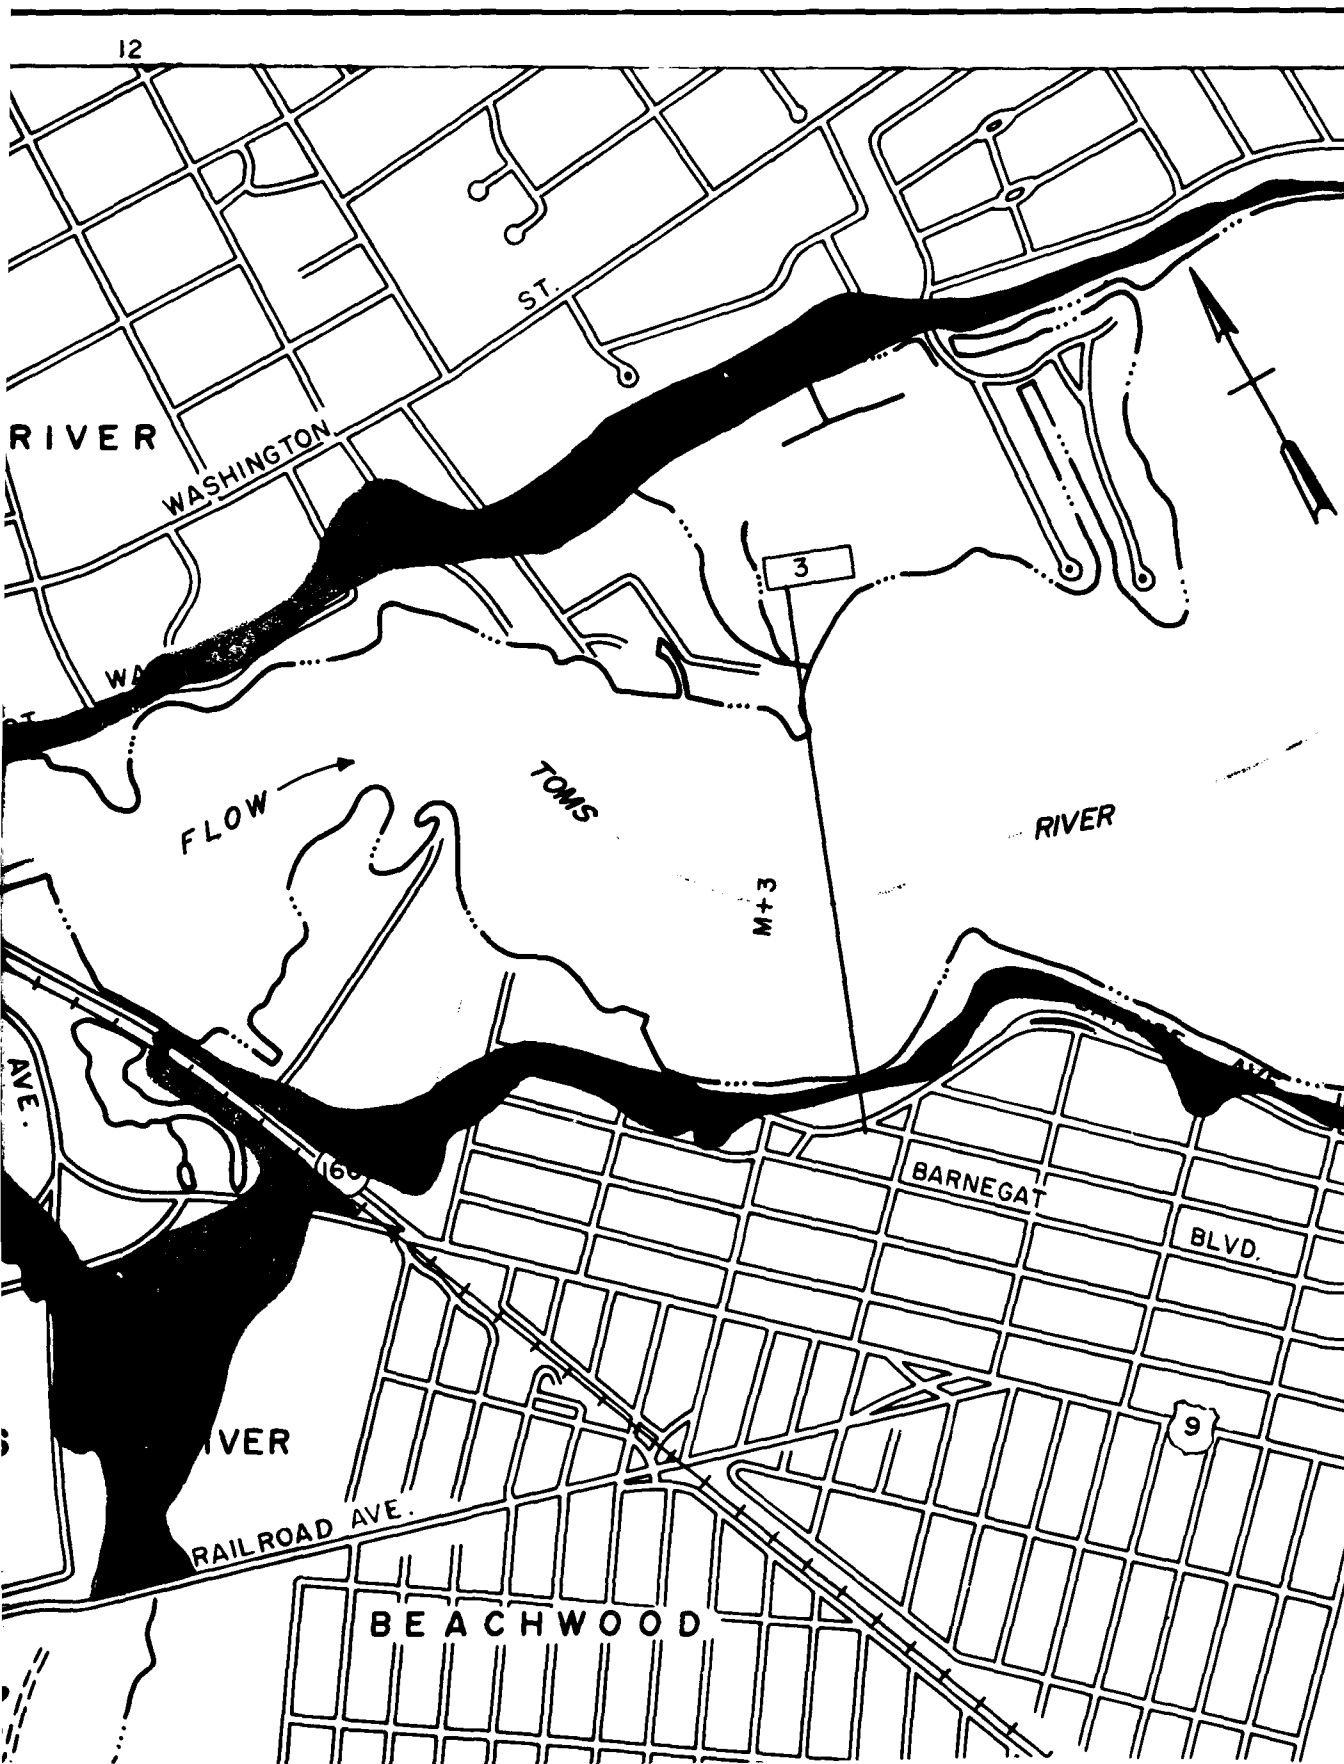

OVER

N.J. FLD
DESIGN
(100 YR.)


M + 3 MILE

4 CROSS
GROU
G.S.
TOW

CHAI


- NOTES**
1. MAP BASED ON SHEET TOMS RIVER ADDITIONS AND CORPS OF ENG
 2. LIMITS OF OVER FROM ACTUAL EXPLAINED IN
 3. AREAS OUTSIDE SUBJECT TO F
 4. MINIMUM CONT

DEPAR
PHILADELPHIA
PHILADEL
FLOOD
OCE
FL

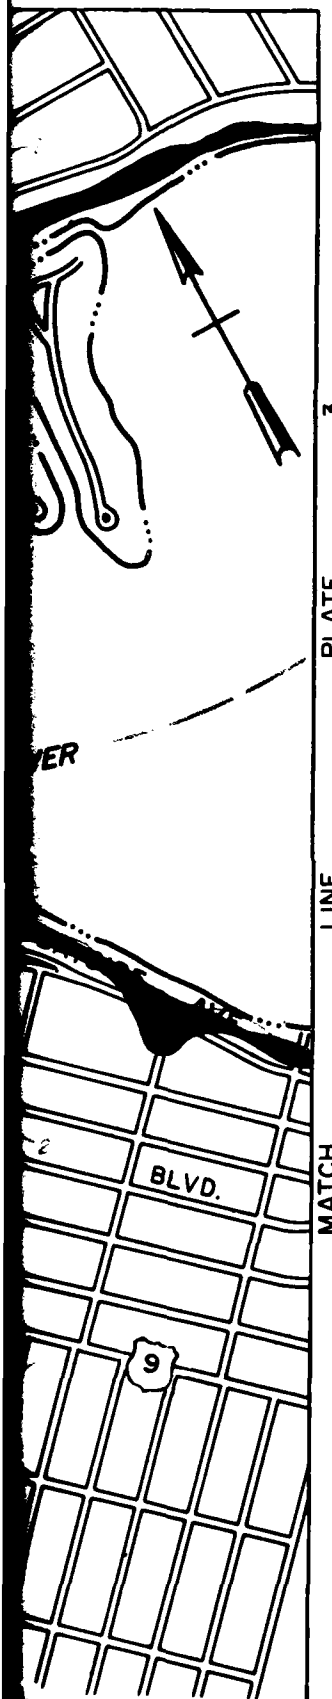

LEGEND

OVERFLOW LIMITS



M + 3 MILES ABOVE MOUTH

4 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. & G.S. 1929 ADJ.) SEA LEVEL DATUM
TOWNSHIP OR BORO LIMITS

CHANNEL

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.



DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.
FLOODED AREAS

JUNE 1972

MATCH LINE PLATE 7


U.S.G.S. STREAM
GAGE (1928 -)

DOVER
TOWNSHIP

CENTRAL RAILROAD OF NEW JERSEY

PARKWAY
CARDINAL DRIVE

37

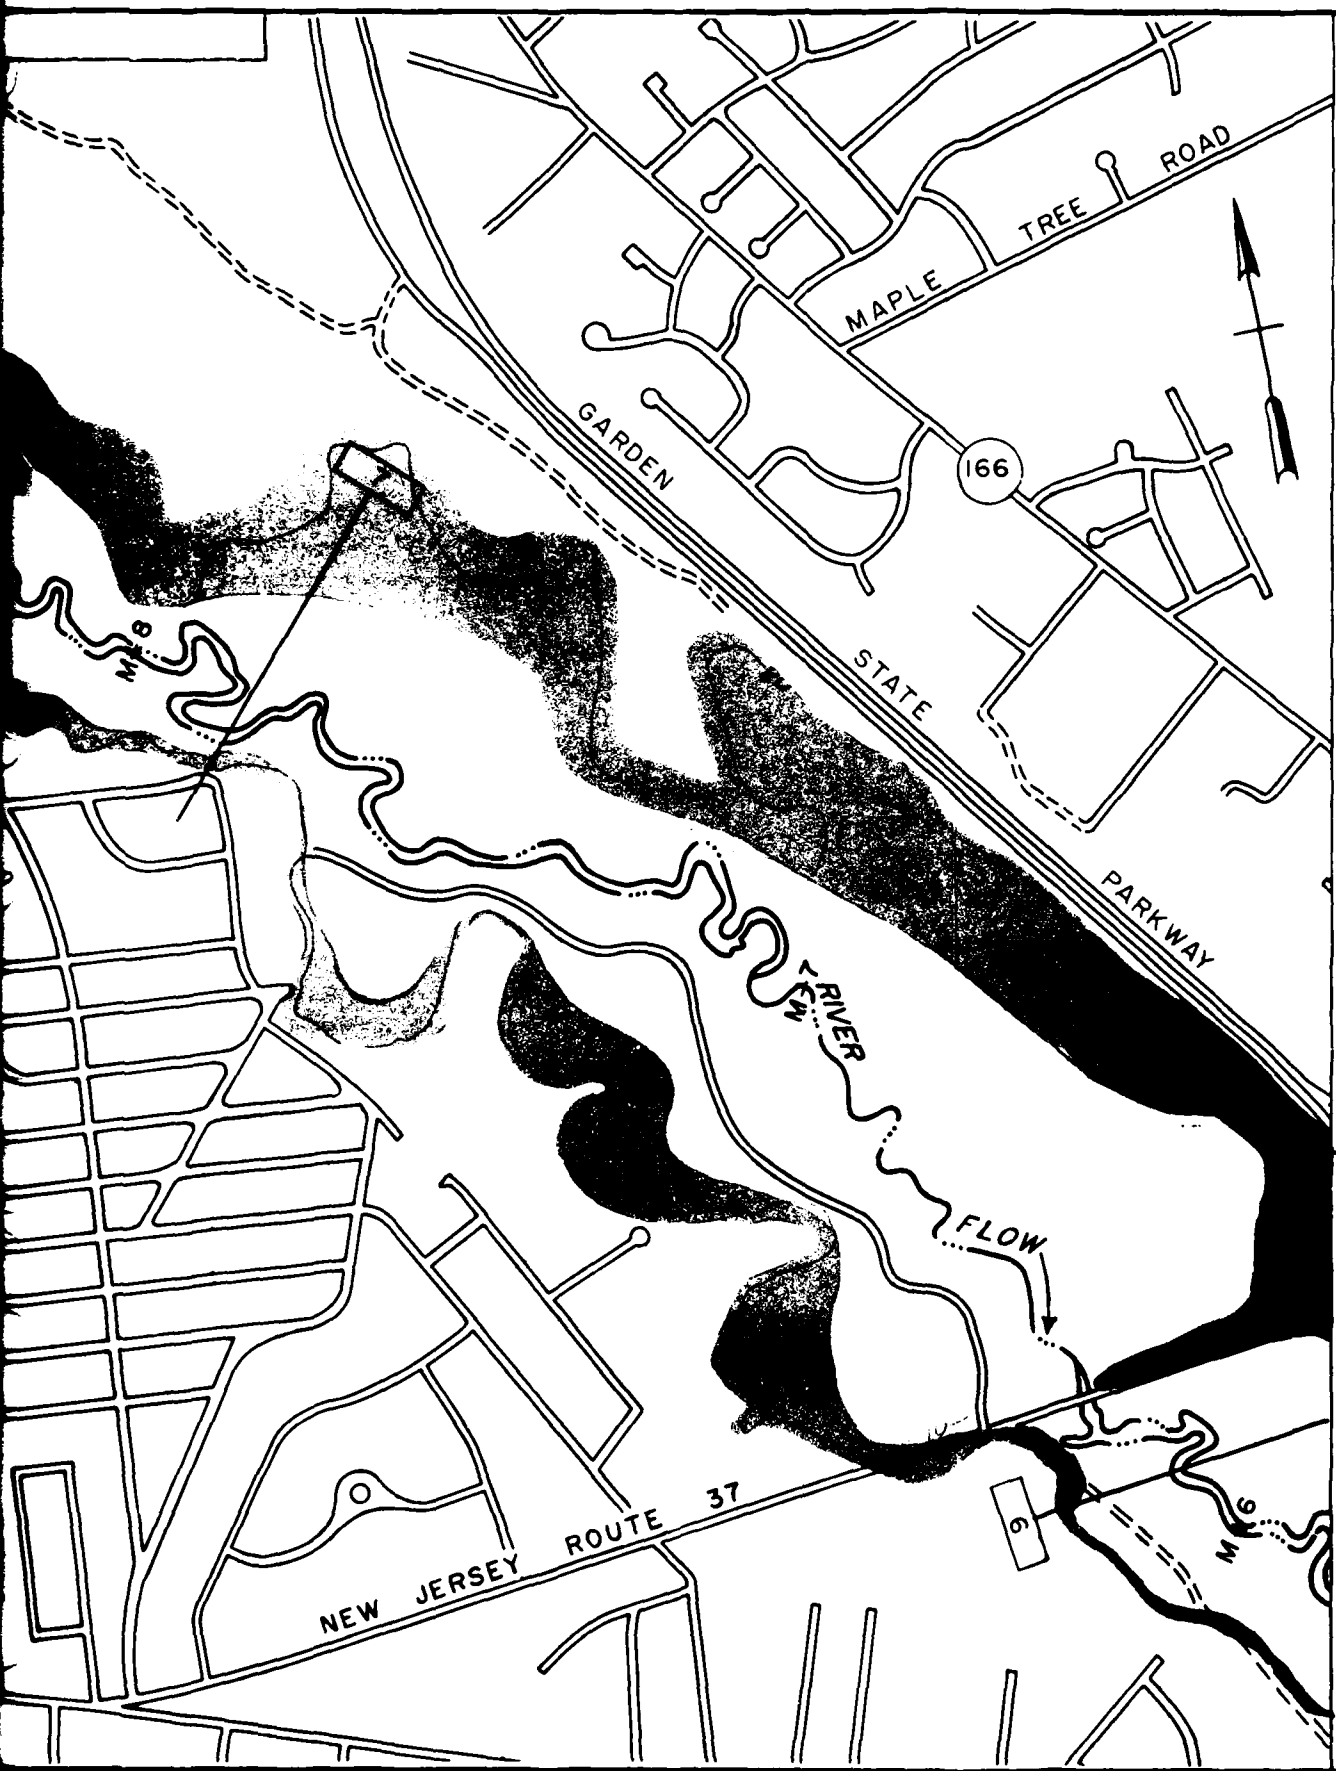

OVER

**N.J. FLO
DESIGN
FLOOD**

M + 7 MILES

7 CROSS

GROU

G.S. I

CHAN

- NOTES**
1. MAP BASED ON SHEET TOMS R ADDITIONS AND CORPS OF ENGI
 2. LIMITS OF OVER FROM ACTUAL I EXPLAINED IN
 3. AREAS OUTSIDE SUBJECT TO FL
 4. MINIMUM CONTI


SC

0

**DEPART
PHILADELPHIA DIS
PHILADELI
FLOOD PL
T
OCEA
FLO**

LEGEND

OVERFLOW LIMITS



M + 7 MILES ABOVE MOUTH

7 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

CHANNEL

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.

SCALE IN FEET






DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLOODED AREAS

JUNE 1972

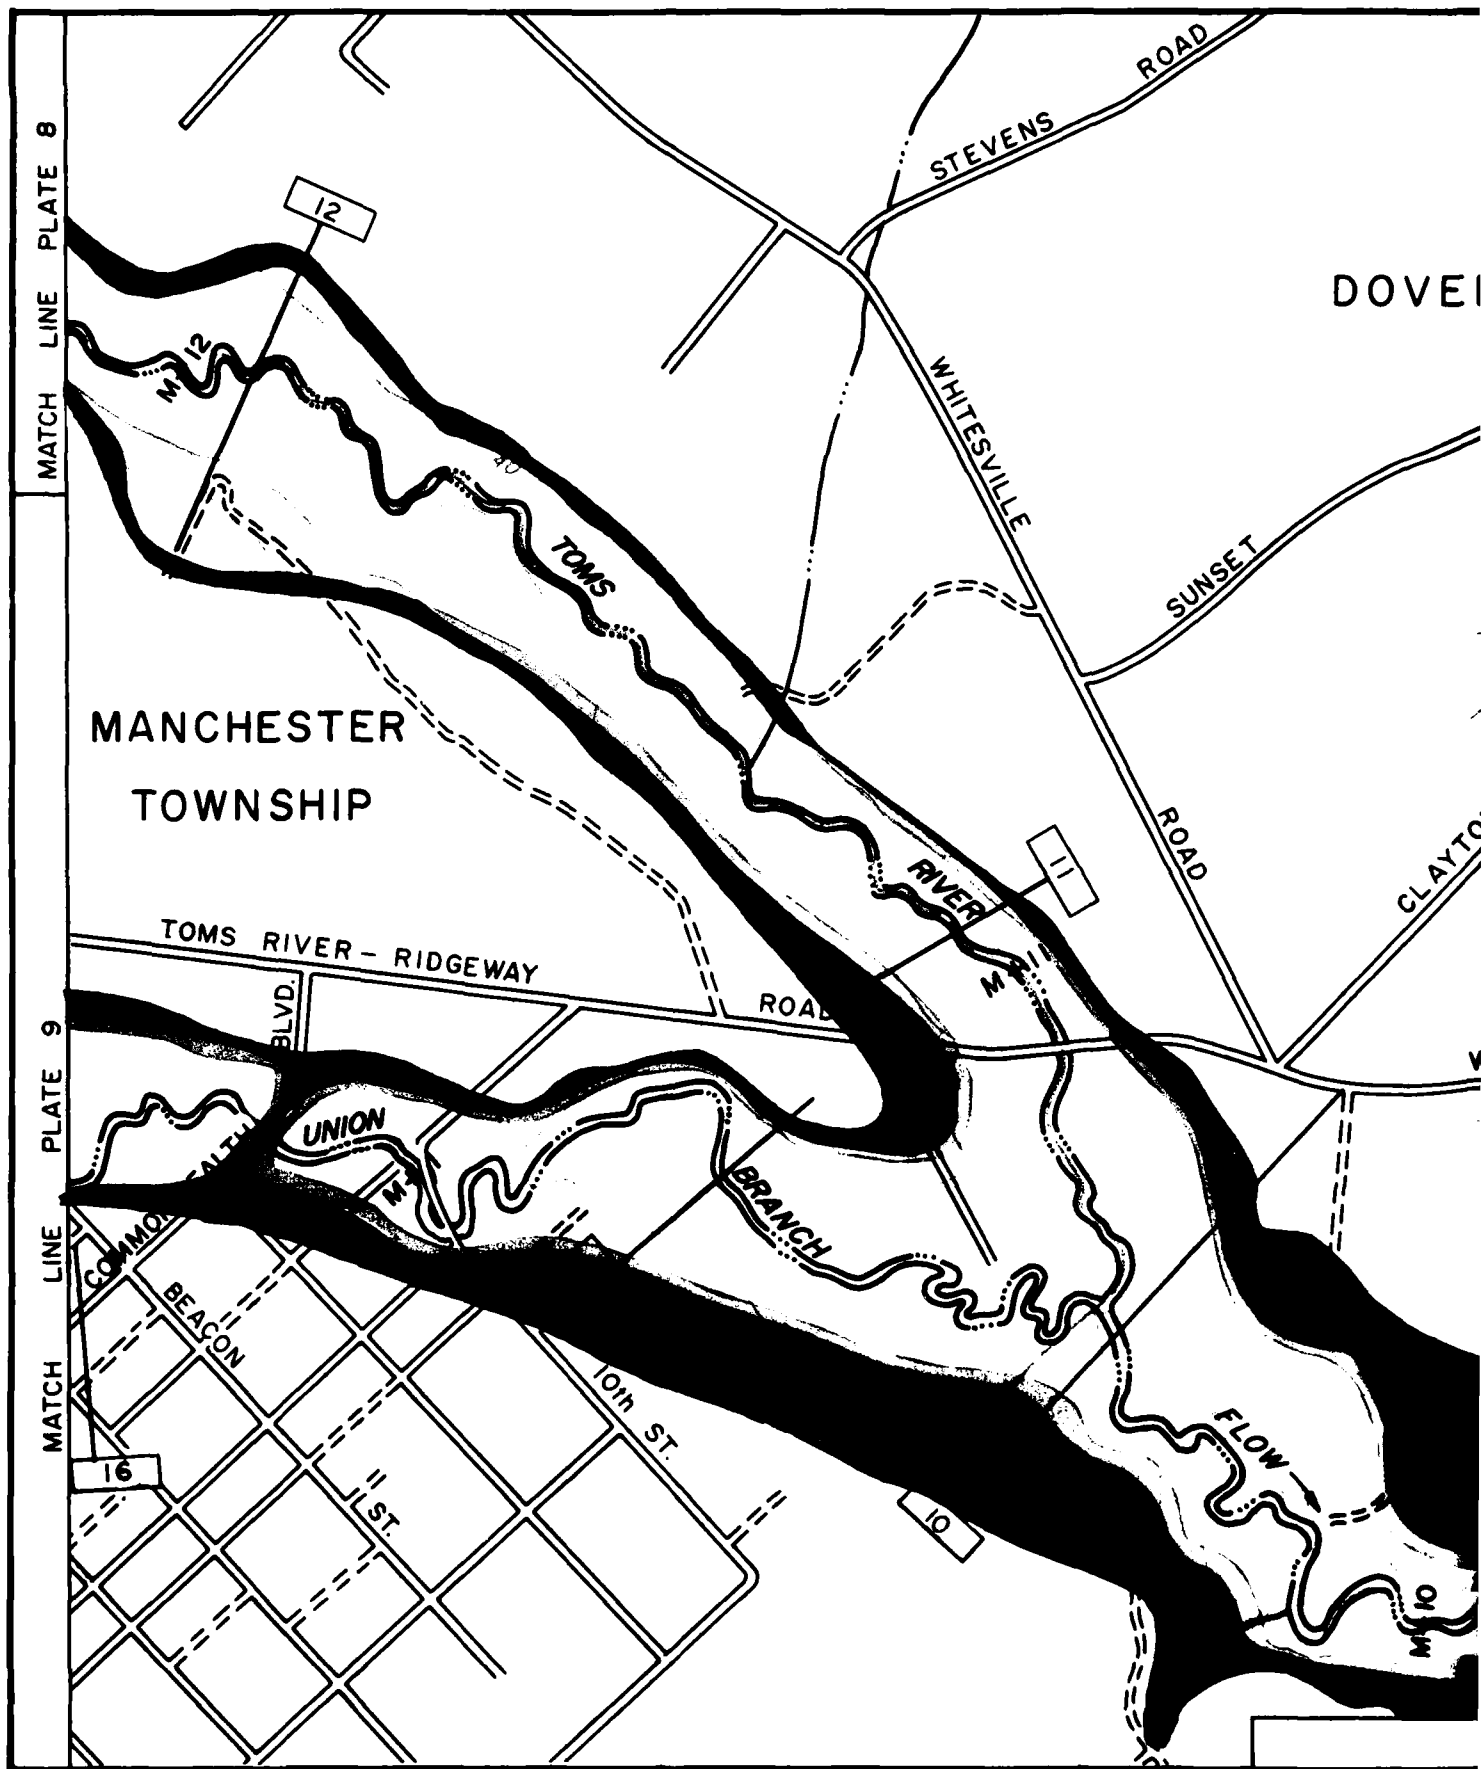

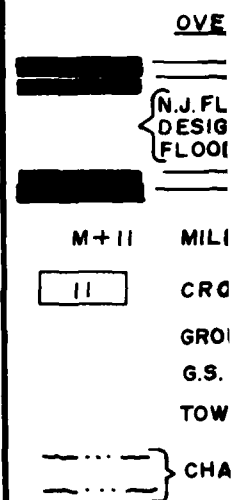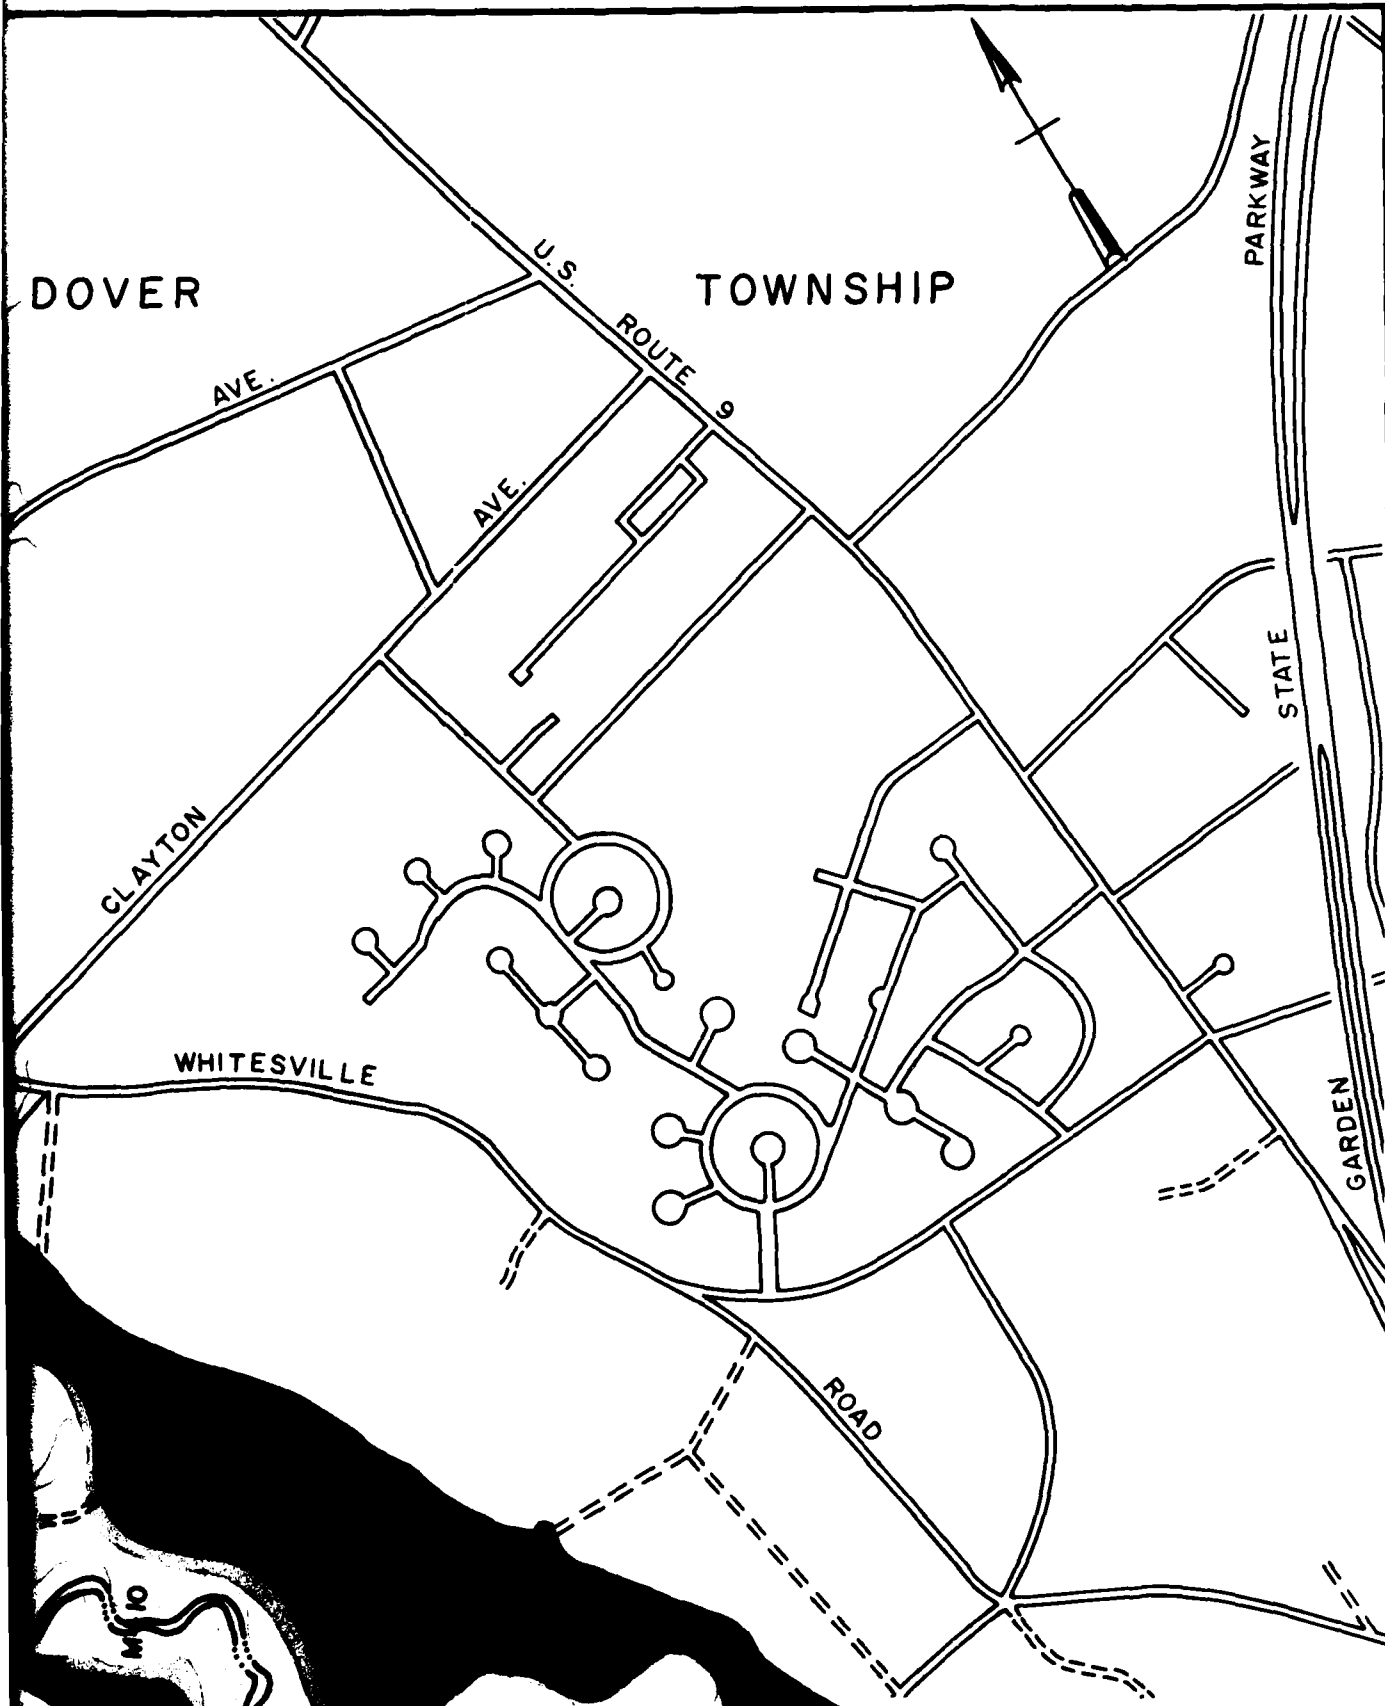

NOTES

1. MAP BASED ON SHEET LAKE N.J., 1953. MINIMENTS MADE
2. LIMITS OF OVI FROM ACTUAL EXPLAINED IN
3. AREAS OUTSIDE SUBJECT TO F
4. MINIMUM CONI



DEPAR
PHILADELPHIA D
PHILADEL
FLOOD F

OCE
FLI



LEGEND

OVERFLOW LIMITS



M+11 MILES ABOVE MOUTH

11 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

TOWNSHIP OR BORO LIMITS

CHANNEL

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET LAKEWOOD, N.J., 1954 & TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.






DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLOODED AREAS

JUNE 1972

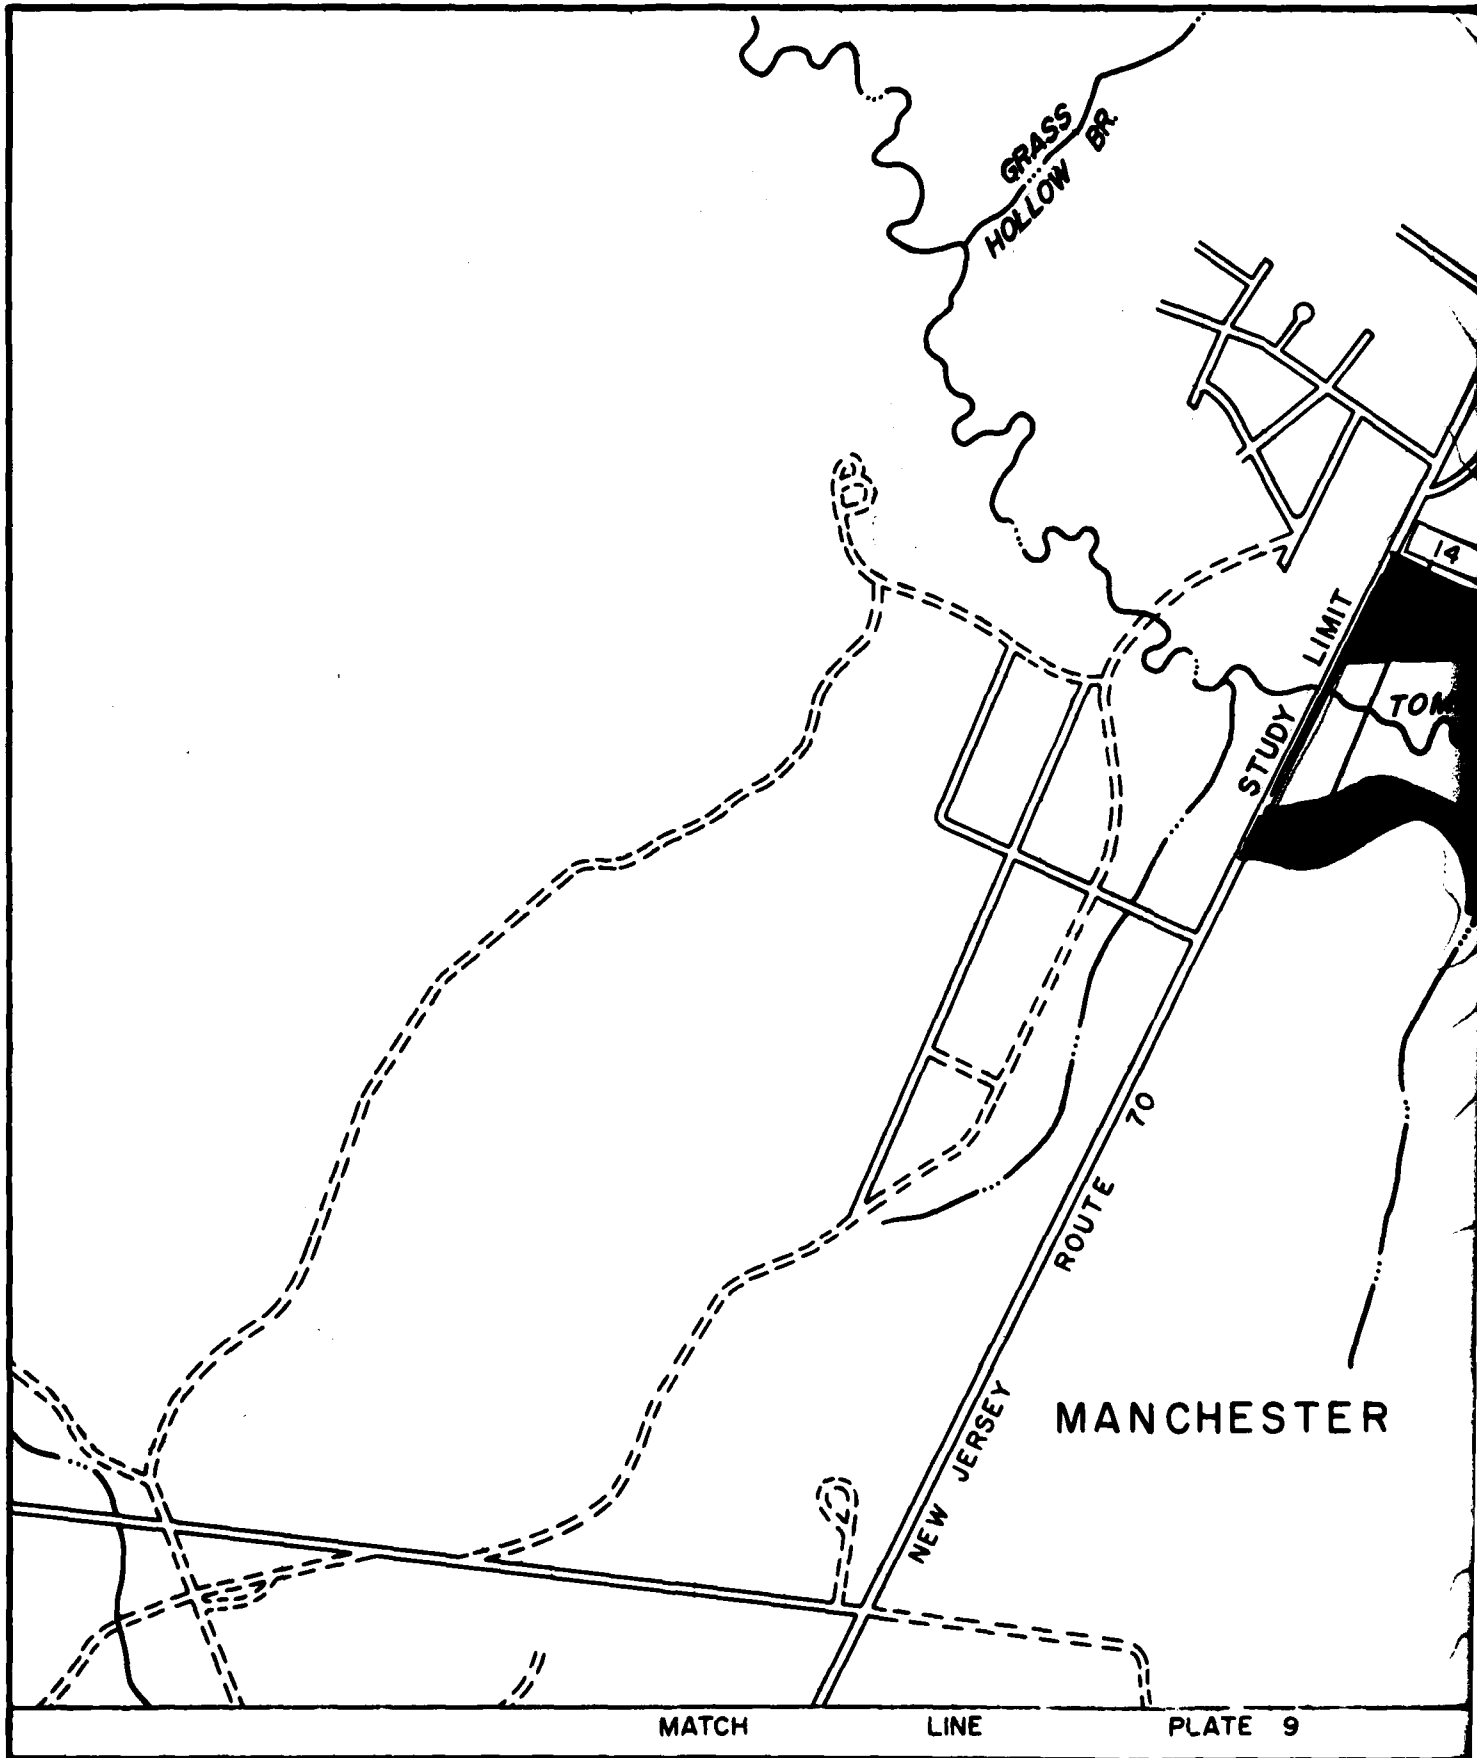

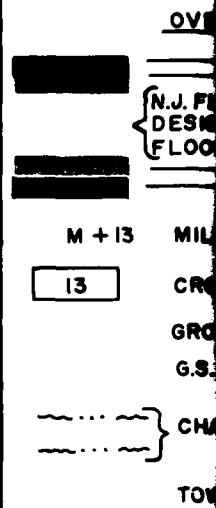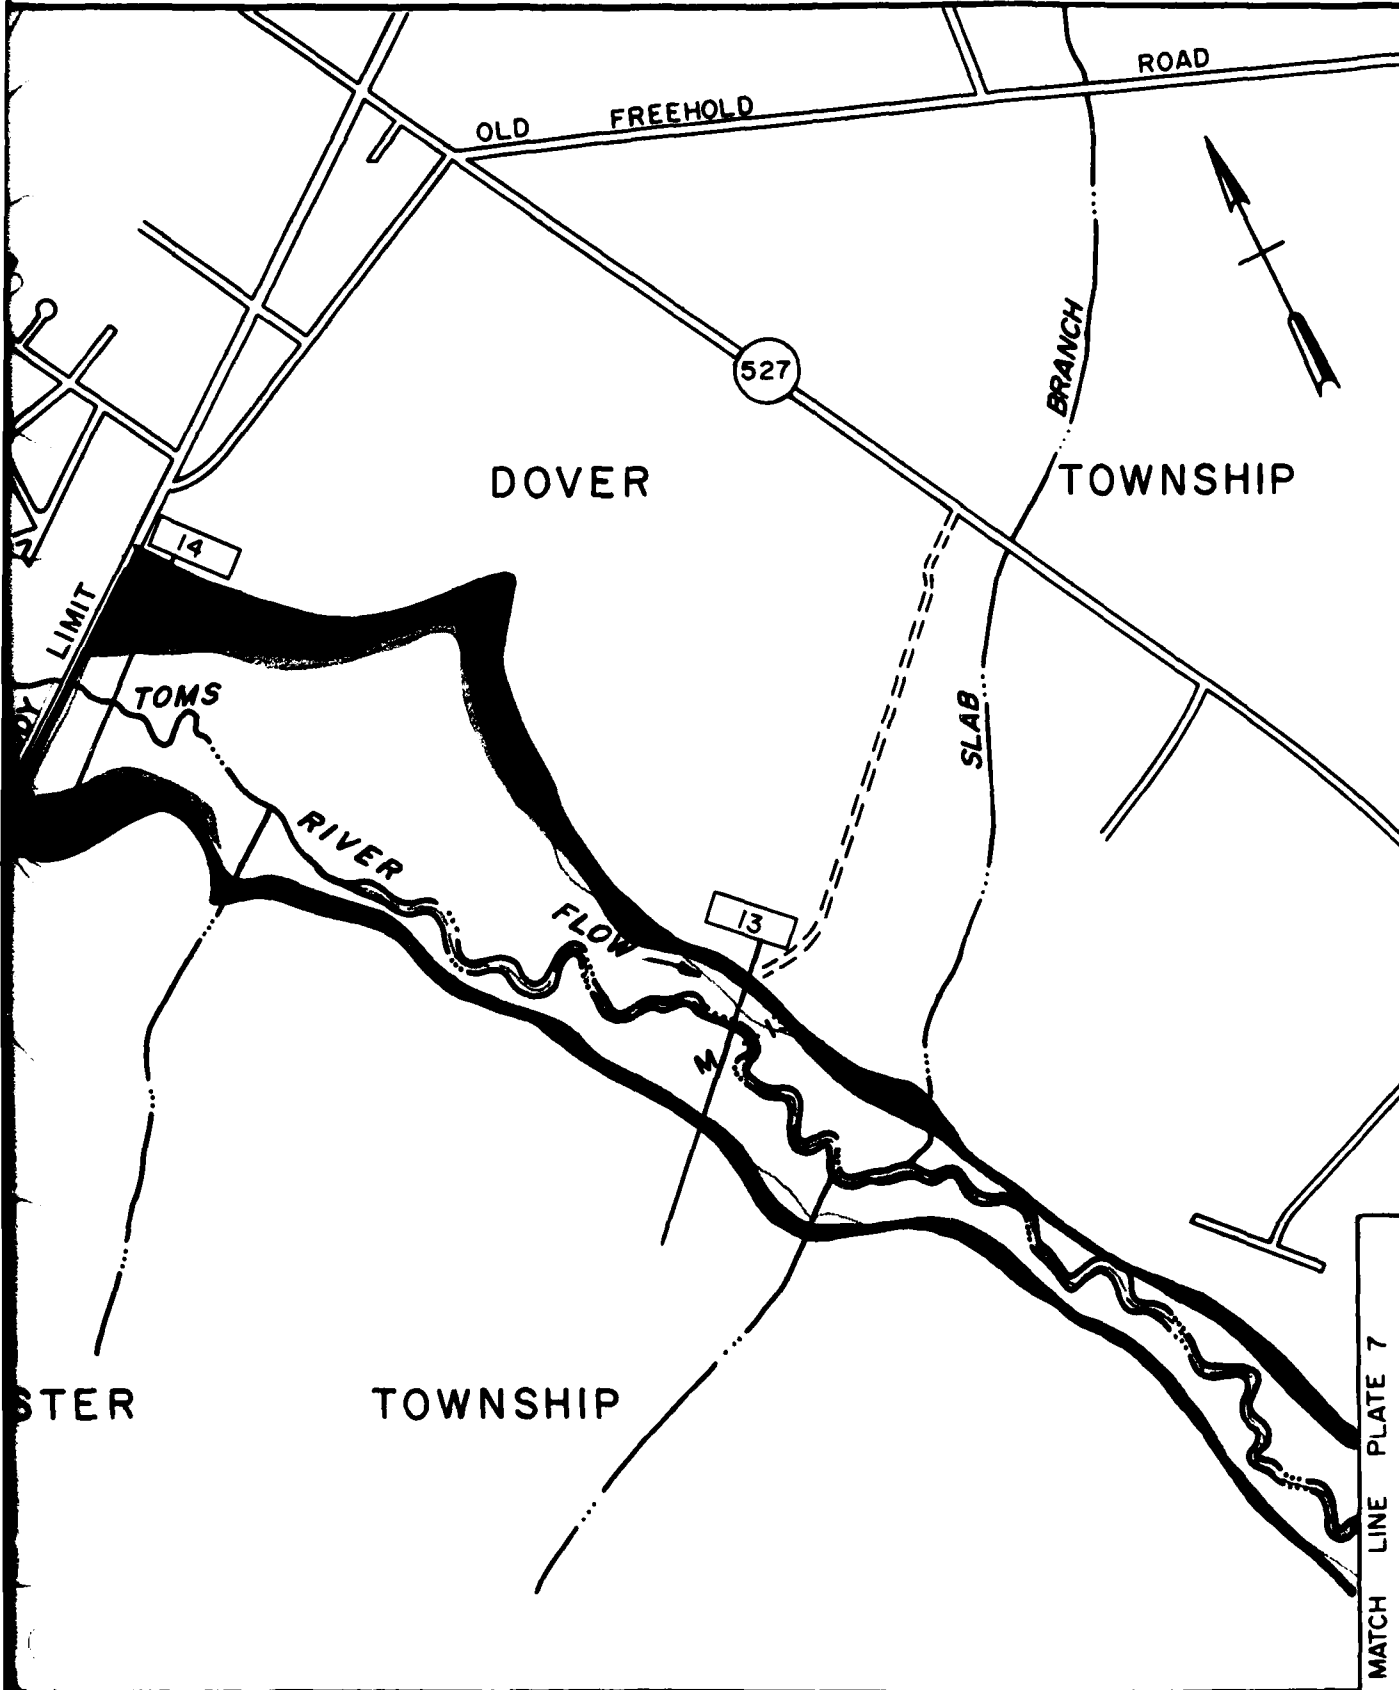

NOTES

1. MAP BASED ON SHEETS LAKE N.J. 1954. MINOR CHANGES MADE
2. LIMITS OF OVERFLOW FROM ACTUAL FLOODING EXPLAINED IN
3. AREAS OUTSIDE SUBJECT TO
4. MINIMUM CON


MATCH LINE PLATE 7

DEPARTMENT OF
PHILADELPHIA
PHILADELPHIA
FLOOD

OCEAN
FL

LEGEND

OVERFLOW LIMITS



M + 13 MILES ABOVE MOUTH

13 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

CHANNEL

TOWNSHIP OR BORO LIMITS

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEETS LAKEHURST, N.J., 1957 & LAKEWOOD, N.J. 1954. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT

SCALE IN FEET





DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.
FLOODED AREAS

JUNE 1972

PLATE 8

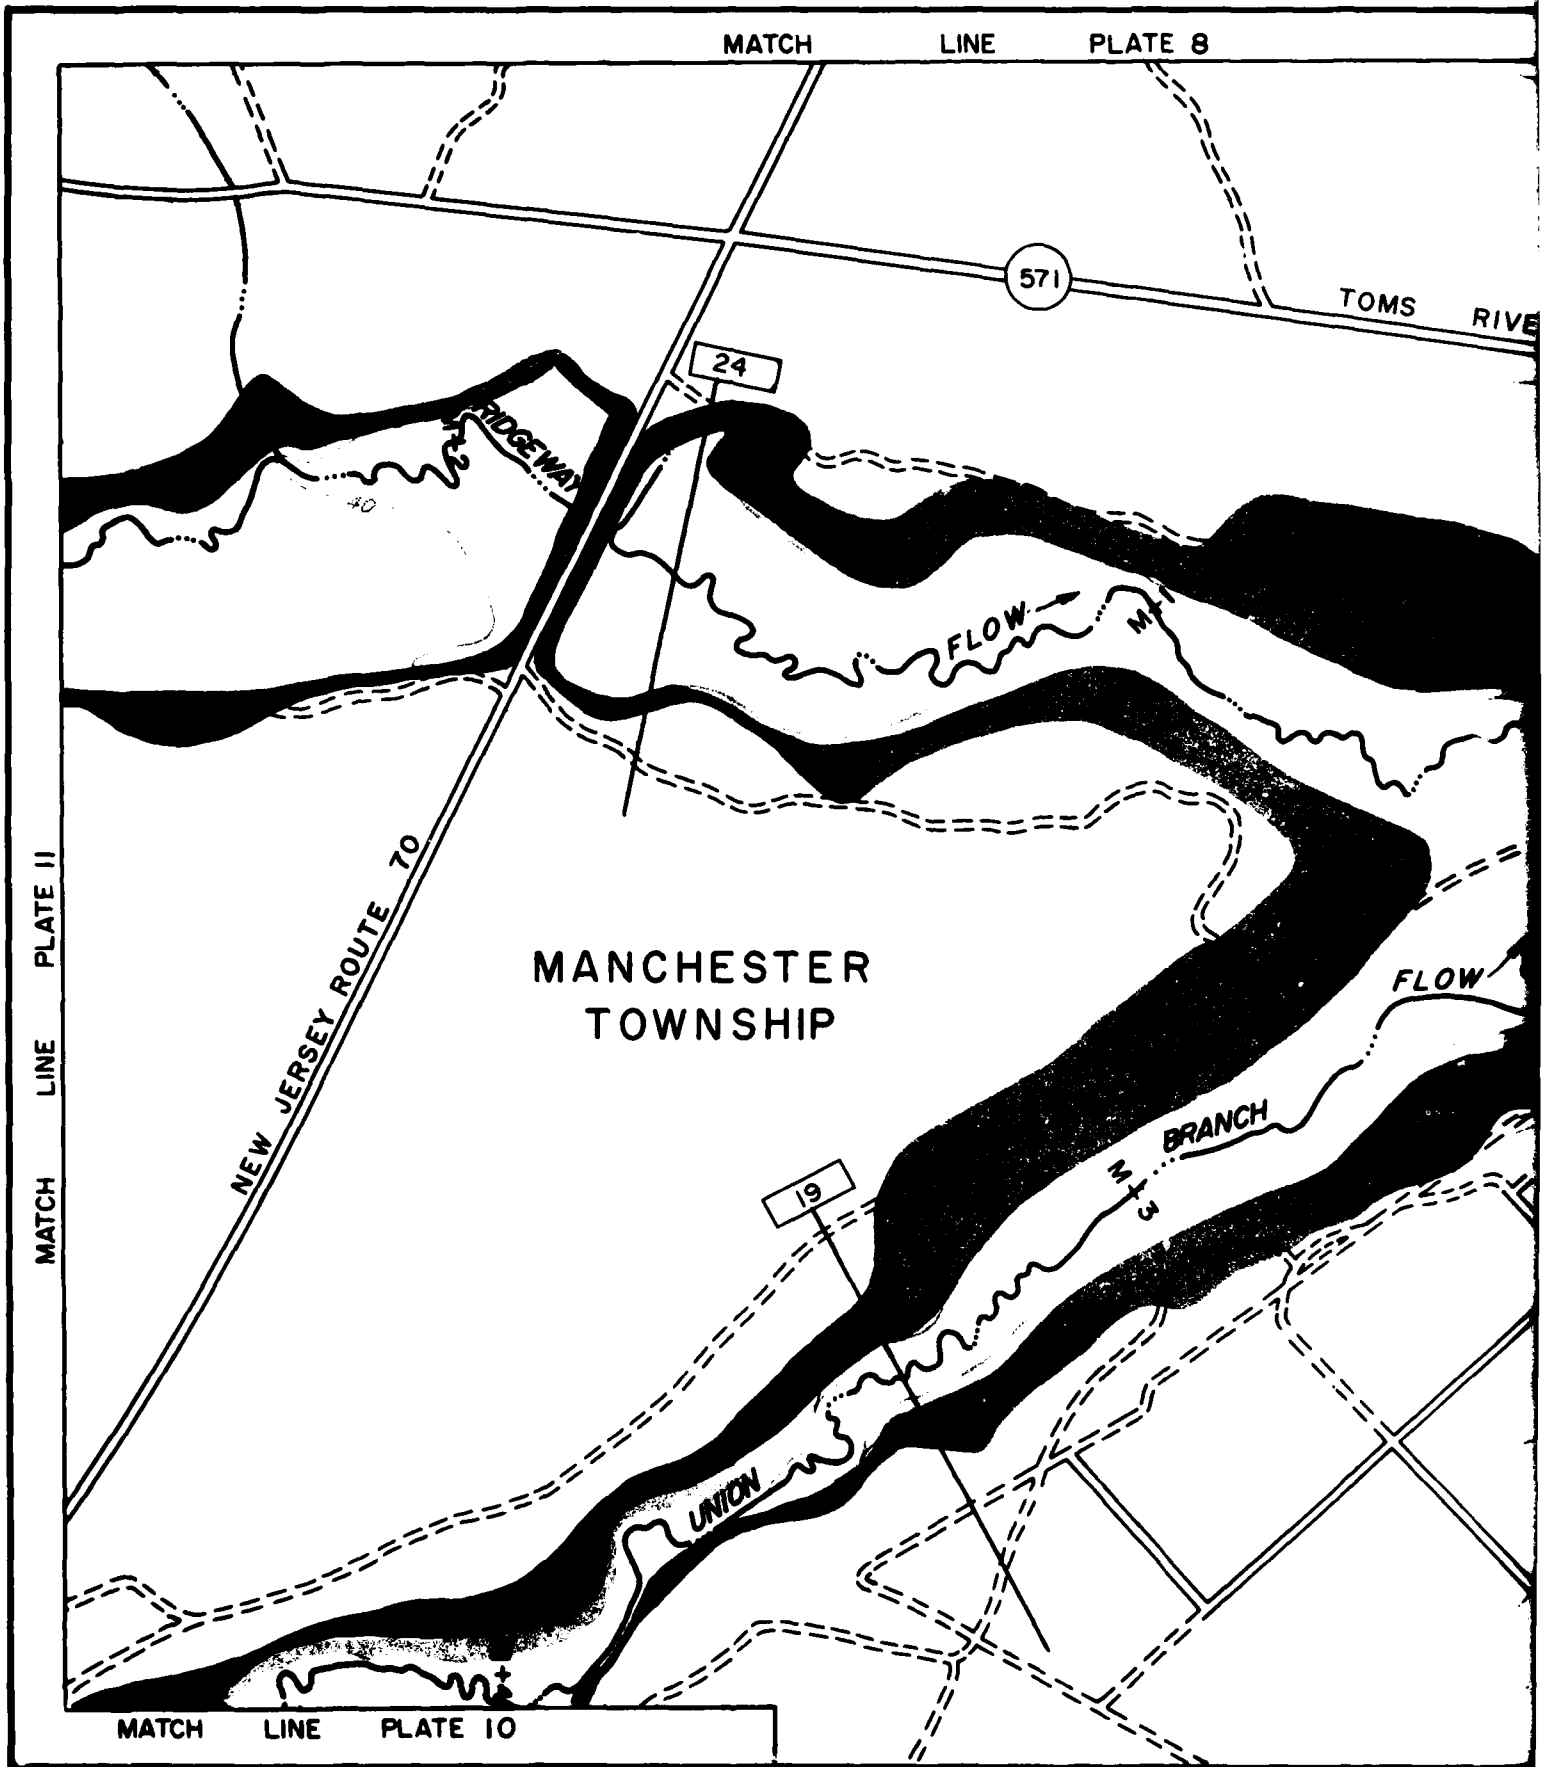

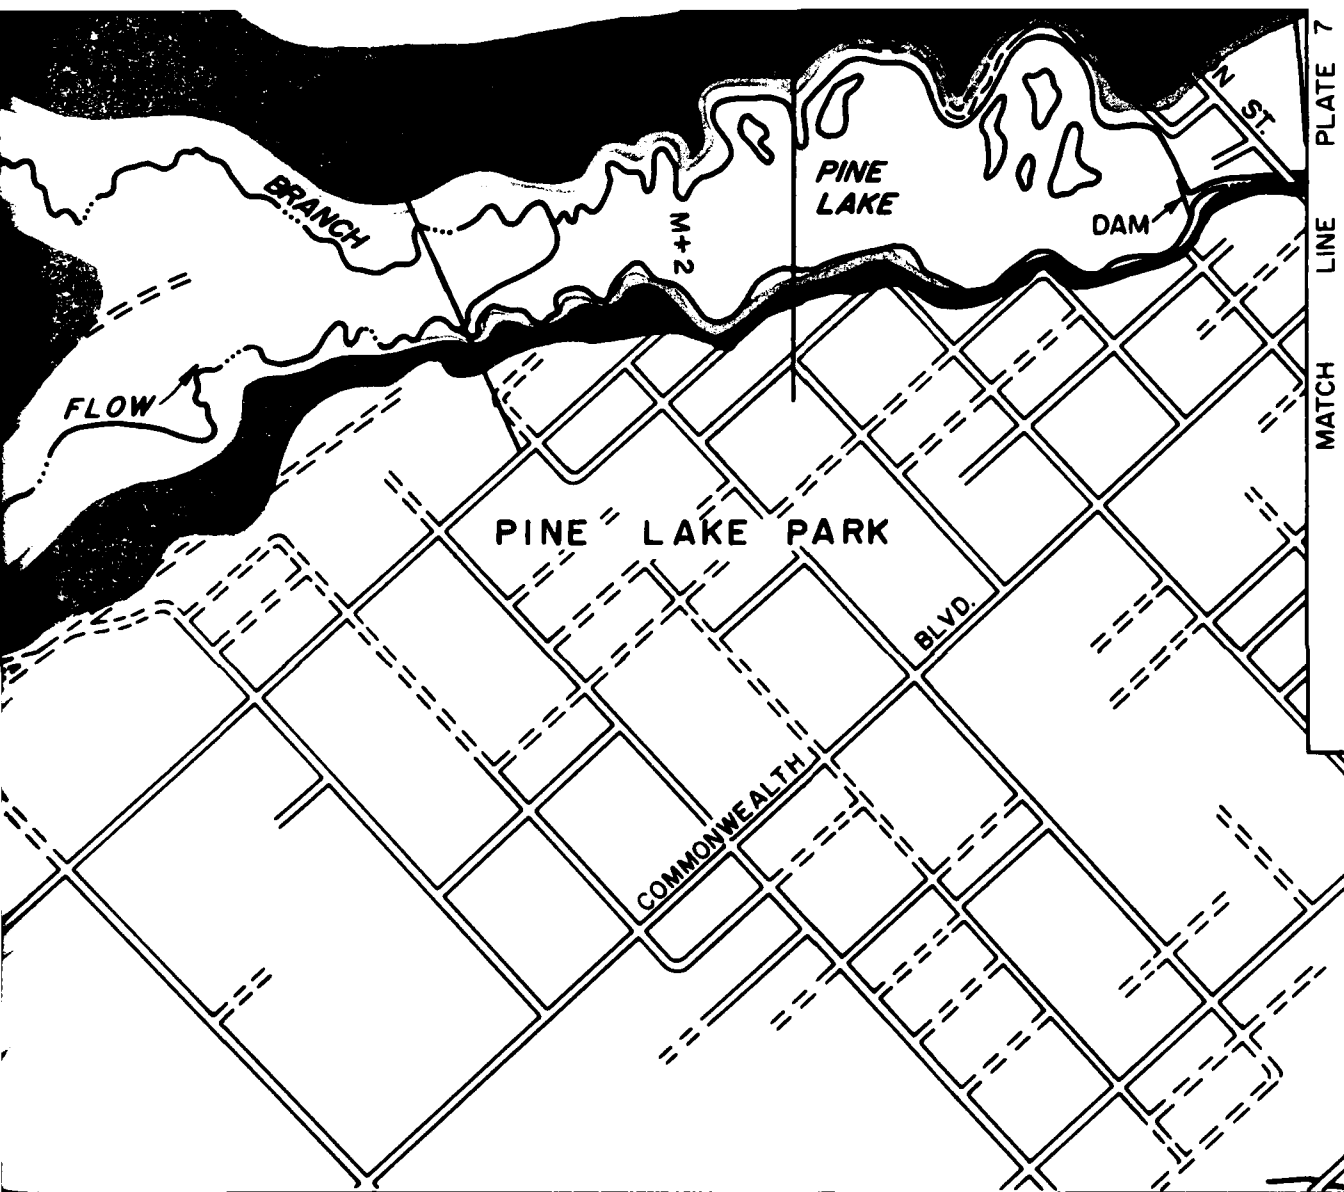

NOTES

1. MAP BASED ON U.S. SHEET LAKE HURON N.J. 1954. MINOR ADJUSTMENTS MADE BY ENGINEERS.
2. LIMITS OF OVERFLOW FROM ACTUAL LOW EXPLAINED IN THE
3. AREAS OUTSIDE 1 SUBJECT TO FLOOD
4. MINIMUM CONTOUR


SCALE



DEPARTMENT OF
PHILADELPHIA DISTRICT
PHILADELPHIA
FLOOD PLANNING
TO THE
OCEAN
FLOODING
JULY

LEGEND

OVERFLOW LIMITS

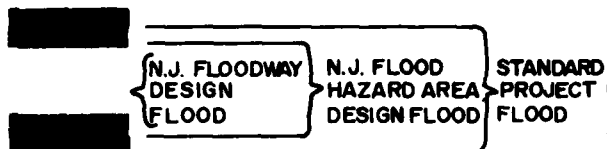

M + 3 MILES ABOVE MOUTH

17 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

--- STREAM CENTERLINE

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET LAKEHURST, N.J., 1957 & LAKEWOOD N.J. 1954. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.

SCALE IN FEET




DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N. J.

FLOODED AREAS

JUNE 1972

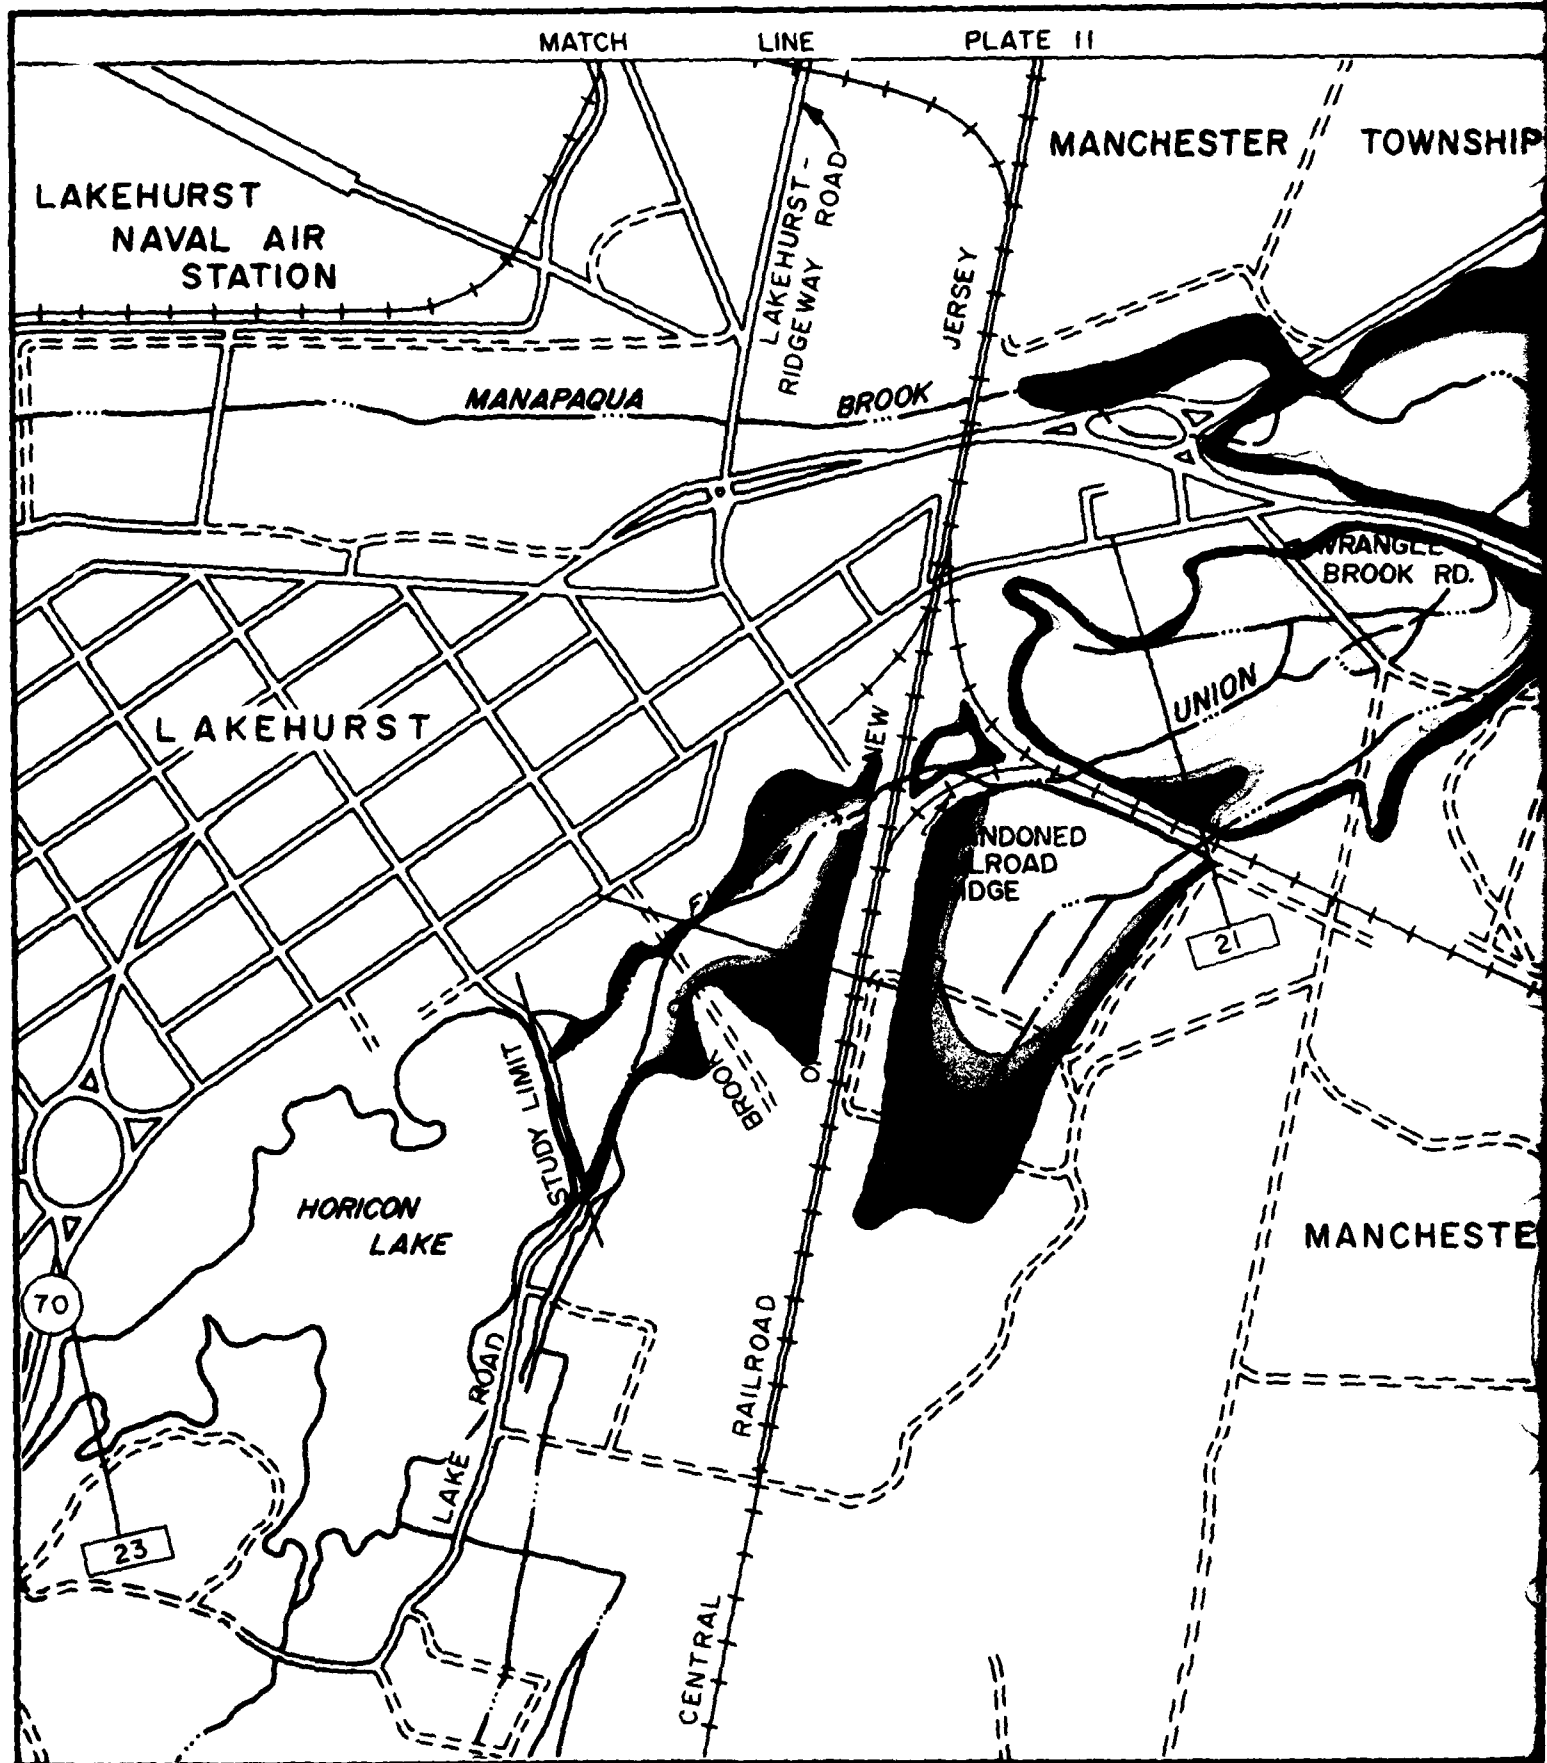

MATCH LINE PLATE 9

TOWNSHIP

70

M-5

RIVE

20

37

ANGLE
LOOK RD.

CENTRAL RAILROAD OF NEW JERSEY

ANCHESTER

TOWNSHIP

OVERFL

(N.J. FLOOD
DESIGN
FLOOD

M+6

MILES A

20

CROSS

GROUND

G.S. 192

STREAM

TOWNSH

NOTES

1. MAP BASED ON U.S. SHEET LAKEHURST ADDITIONS AND AD CORPS OF ENGINE
2. LIMITS OF OVERFL FROM ACTUAL LOC EXPLAINED IN TH
3. AREAS OUTSIDE T SUBJECT TO FLOOD
4. MINIMUM CONTOUR

SCALE

0

DEPARTME
PHILADELPHIA DIST
PHILADELPH
FLOOD PLA
TO
OCEAN
FLOOD

OVERFLOW LIMITS

OVERFLOW LIMITS



M + 6 MILES ABOVE MOUTH

20 **CROSS SECTION**

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

STREAM CENTERLINE

TOWNSHIP OR BORO LIMITS

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET LAKEHURST, N.J., 1957. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.

SCALE IN FEET





DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLODED AREAS

JUNE 1972

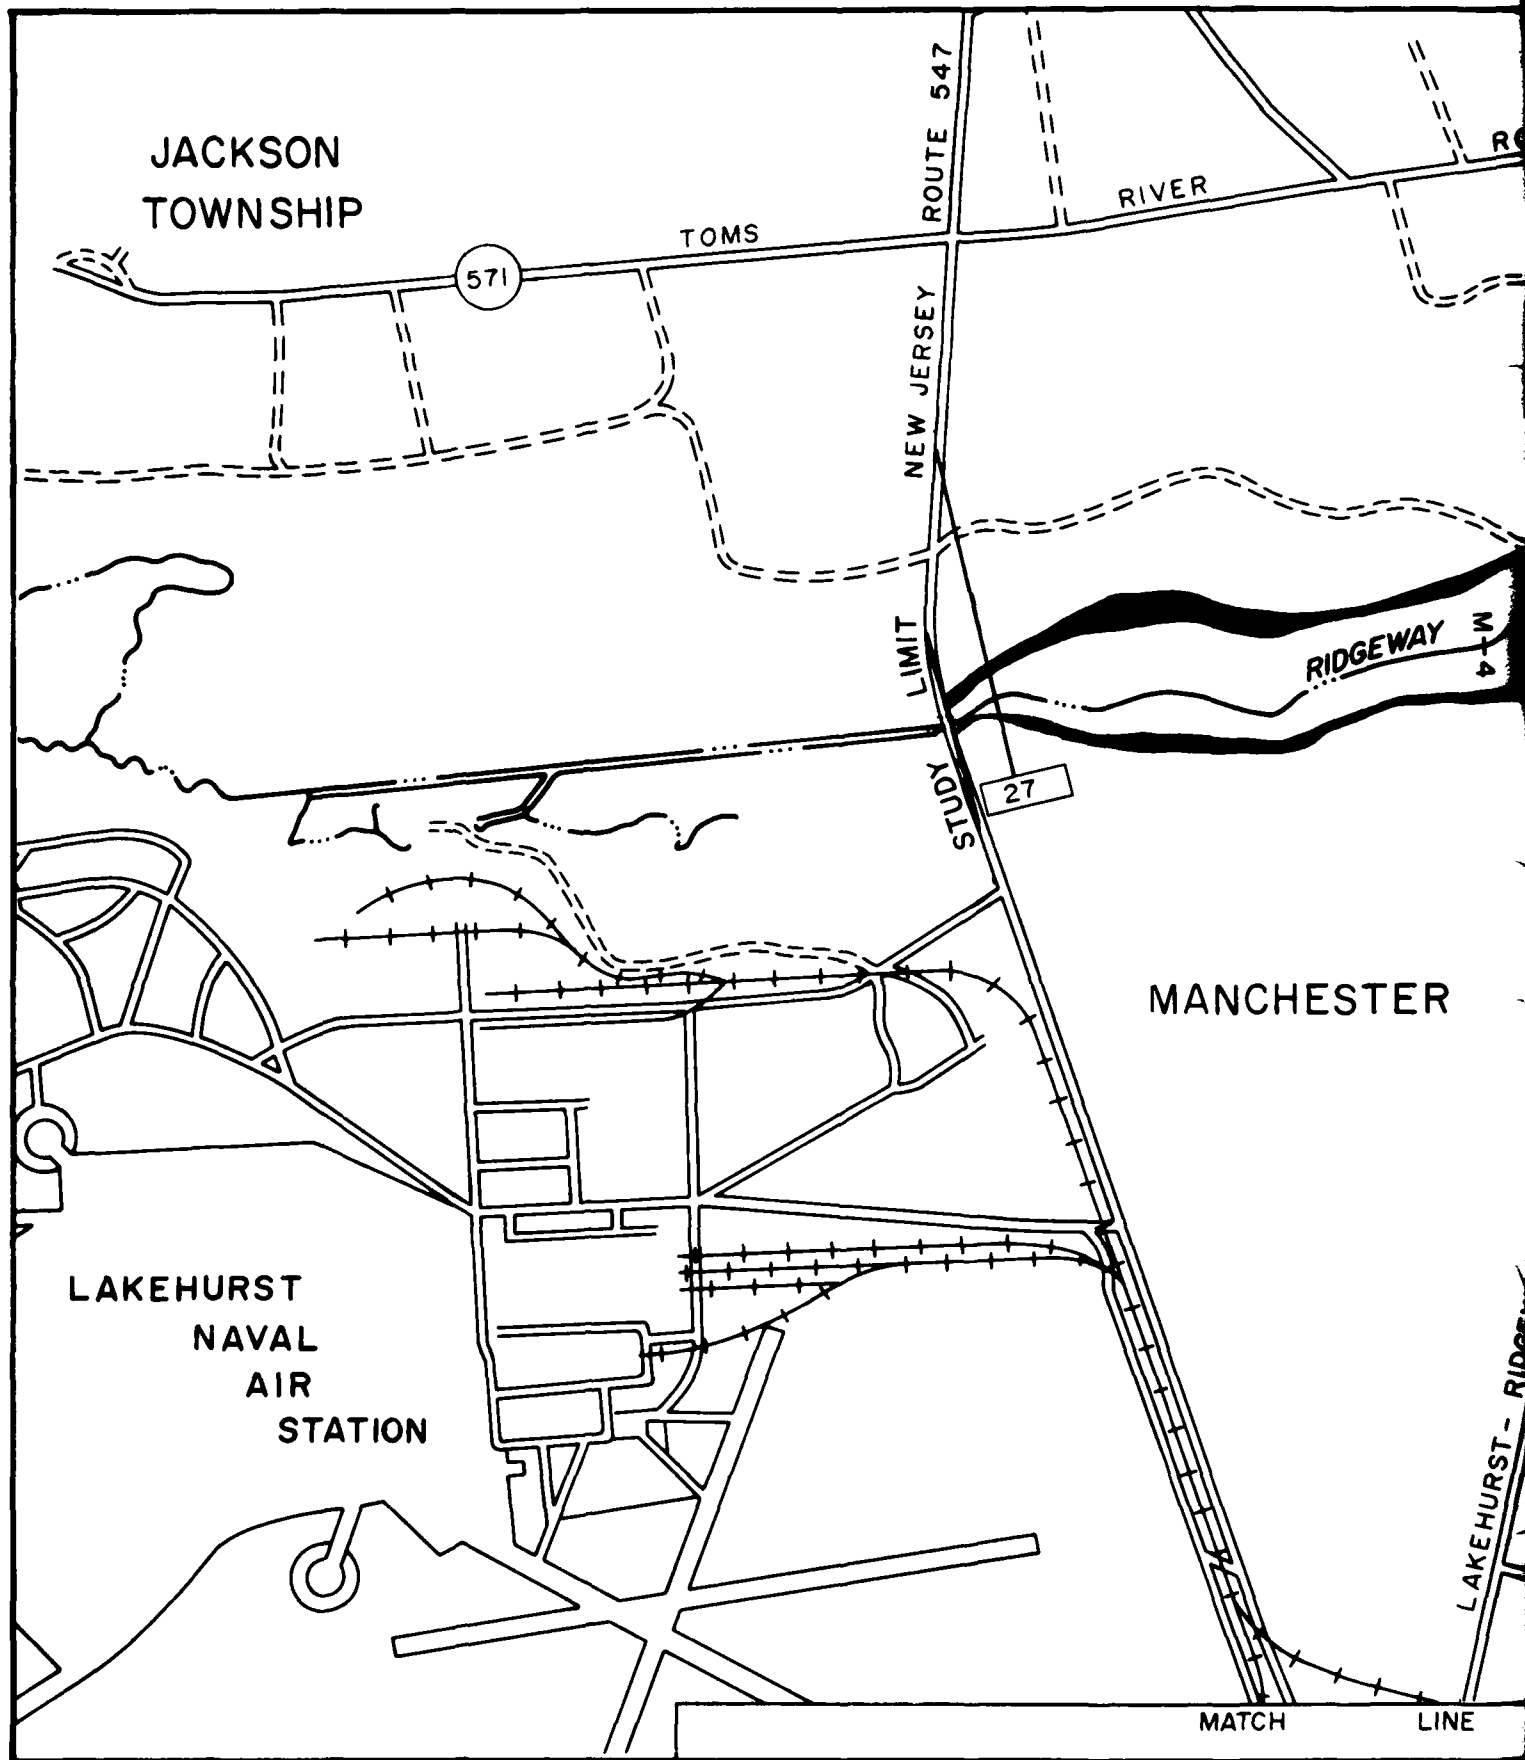

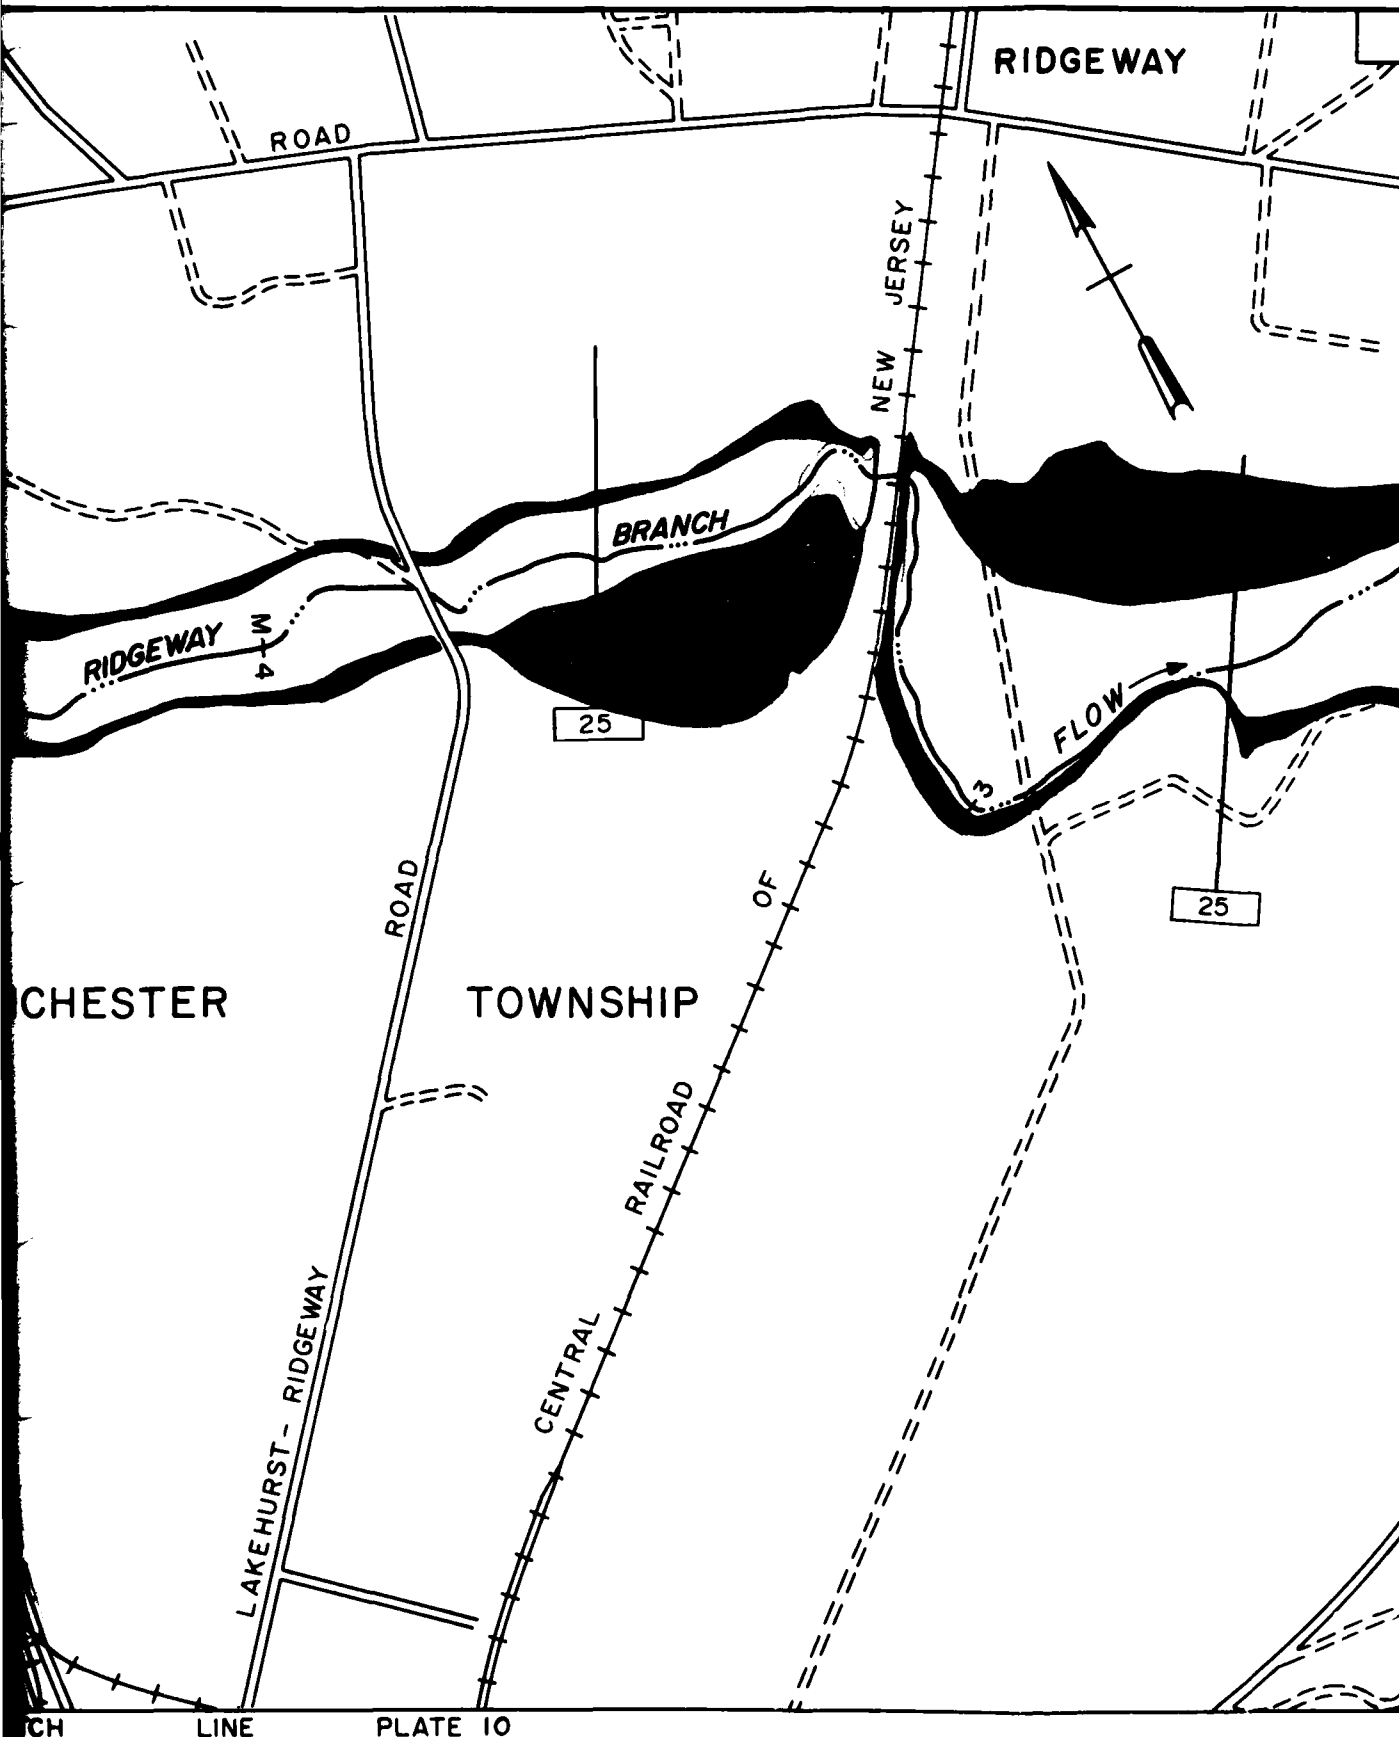

NOTES

1. MAP BASE
SHEET 1
ADDITION
CORPS C
2. LIMITS (FROM AC
EXPLAIN
3. AREAS (SUBJECT
4. MINIMUM

PLATE 9
LINE
MATCH

PHILADELPHIA
PHILADELPHIA
FLO

CH LINE PLATE 10

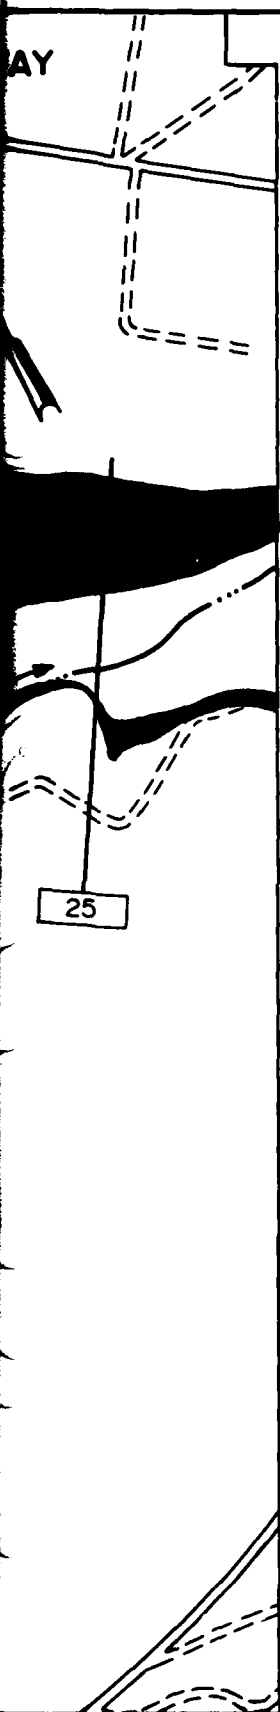


PLATE 9
LINE
MATCH

LEGEND

OVERFLOW LIMITS



M+3 MILES ABOVE MOUTH

25 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. & G.S. 1929 ADJ.) SEA LEVEL DATUM


— · · · — STREAM CENTERLINE

— — — — — TOWNSHIP OR BORO LIMITS

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET LAKEHURST, N.J., 1957. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.

SCALE IN FEET



DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLOODED AREAS
JUNE 1972

MATCH

LINE

PLATE 13

LS 7

LS 6

HOOPER

AVE

STREET

ROAD

CHESTNUT

STREET

DOVER

WALNUT

STREET

STATE

CEDER

TO

166

JAMES

PLATE 6



LINE

MATCH

MATCH

LINE

PLATE 5

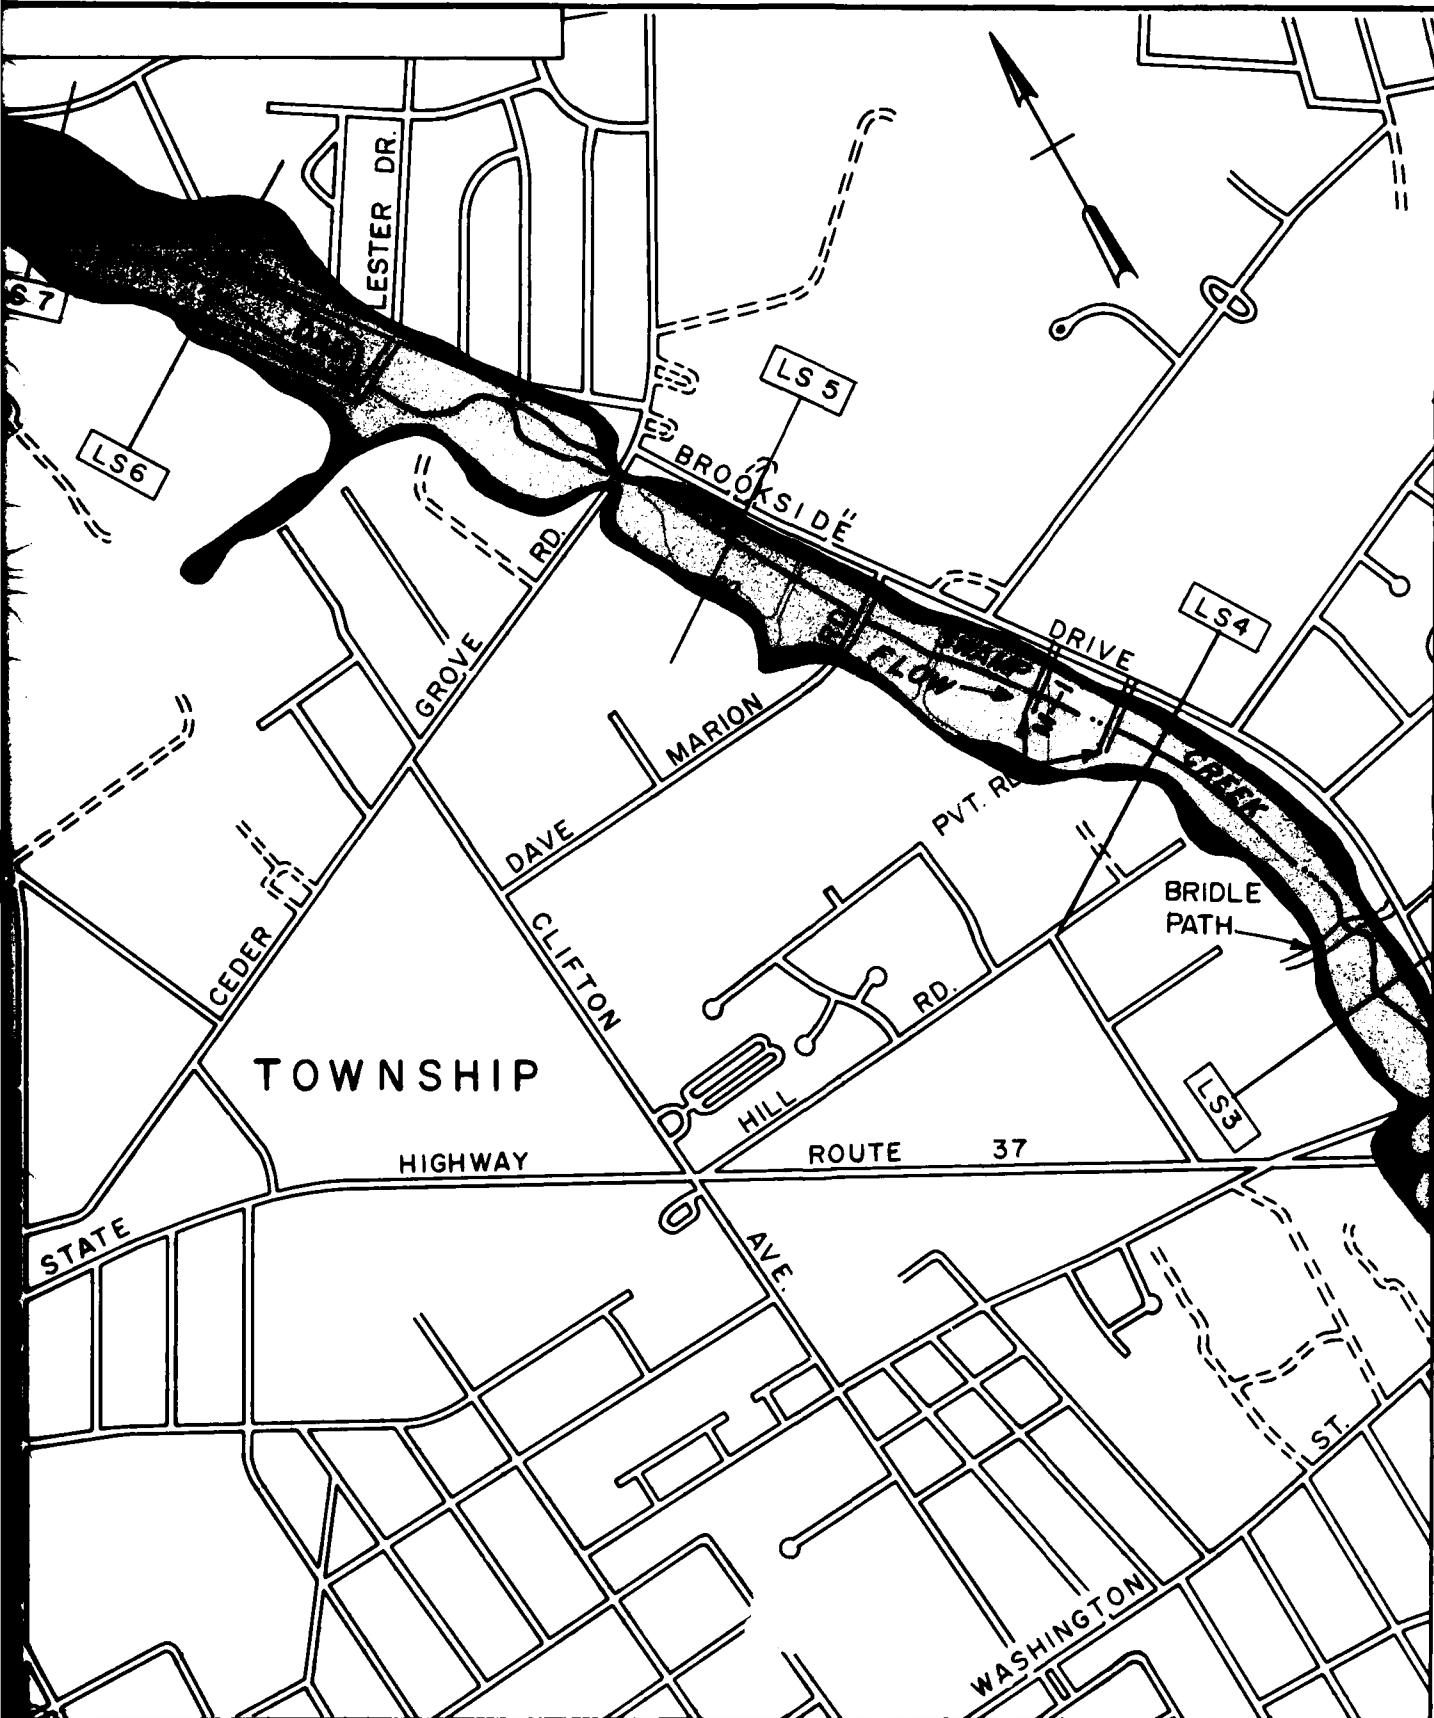

M+2

LS 5

NOTES

1. MAP BASE SHEET 1 ADDITIONAL CORPS (
2. LIMITS (FROM A EXPLAIN
3. AREAS (SUBJECT
4. MINIMUM

PLATE 4
LINE
MATCH

PHILADELPHIA
PHILADELPHIA
FLO

LEGEND

OVERFLOW LIMITS



M+2 MILES ABOVE MOUTH

LS 5 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

~ ~ ~ ~ ~ STREAM CENTERLINE

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEET TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.





DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.

FLOODED AREAS


JUNE 1972

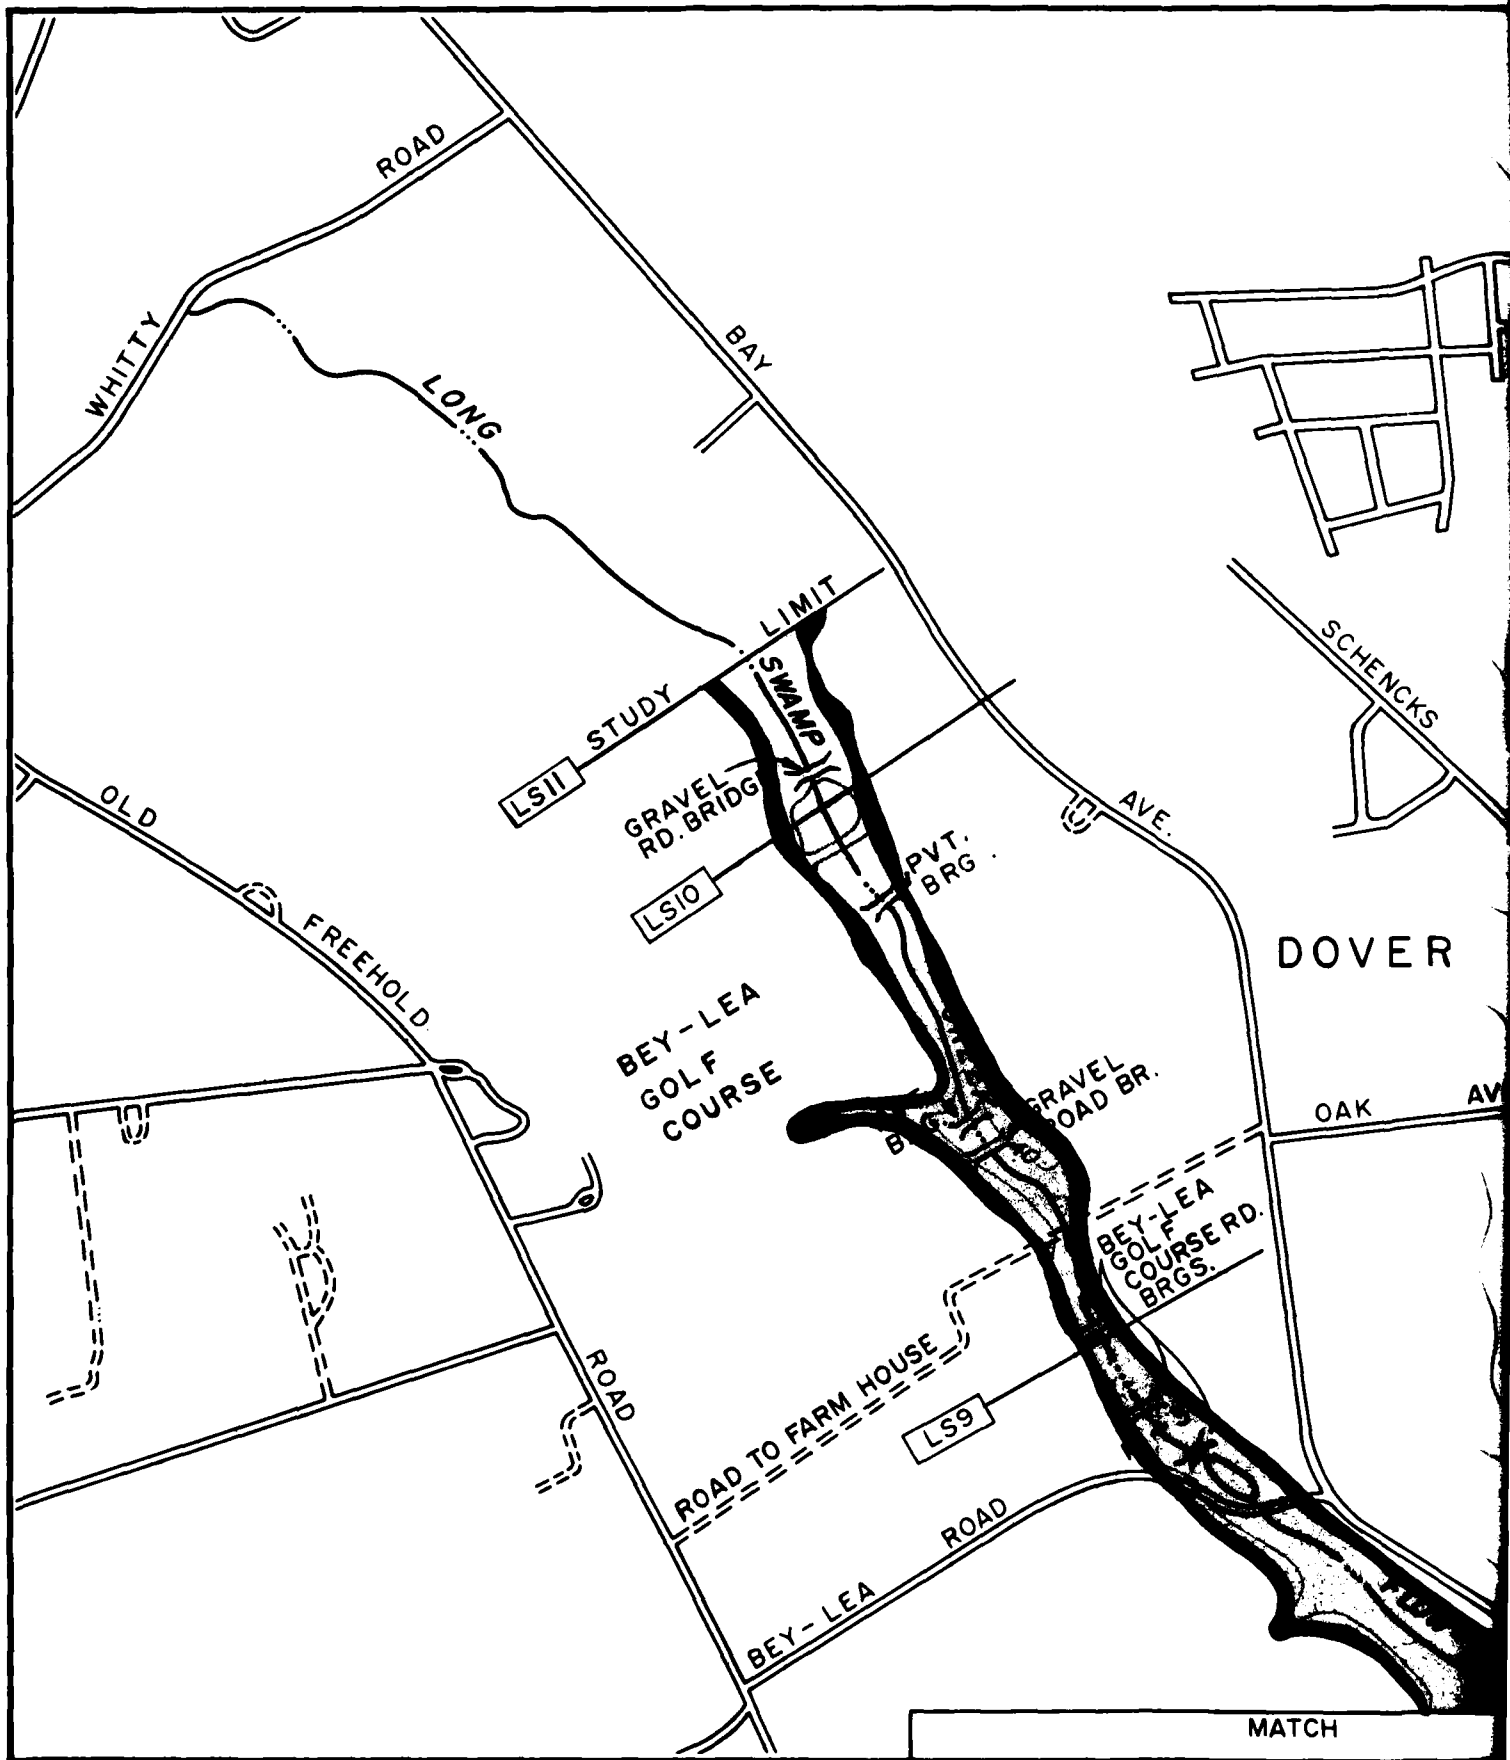

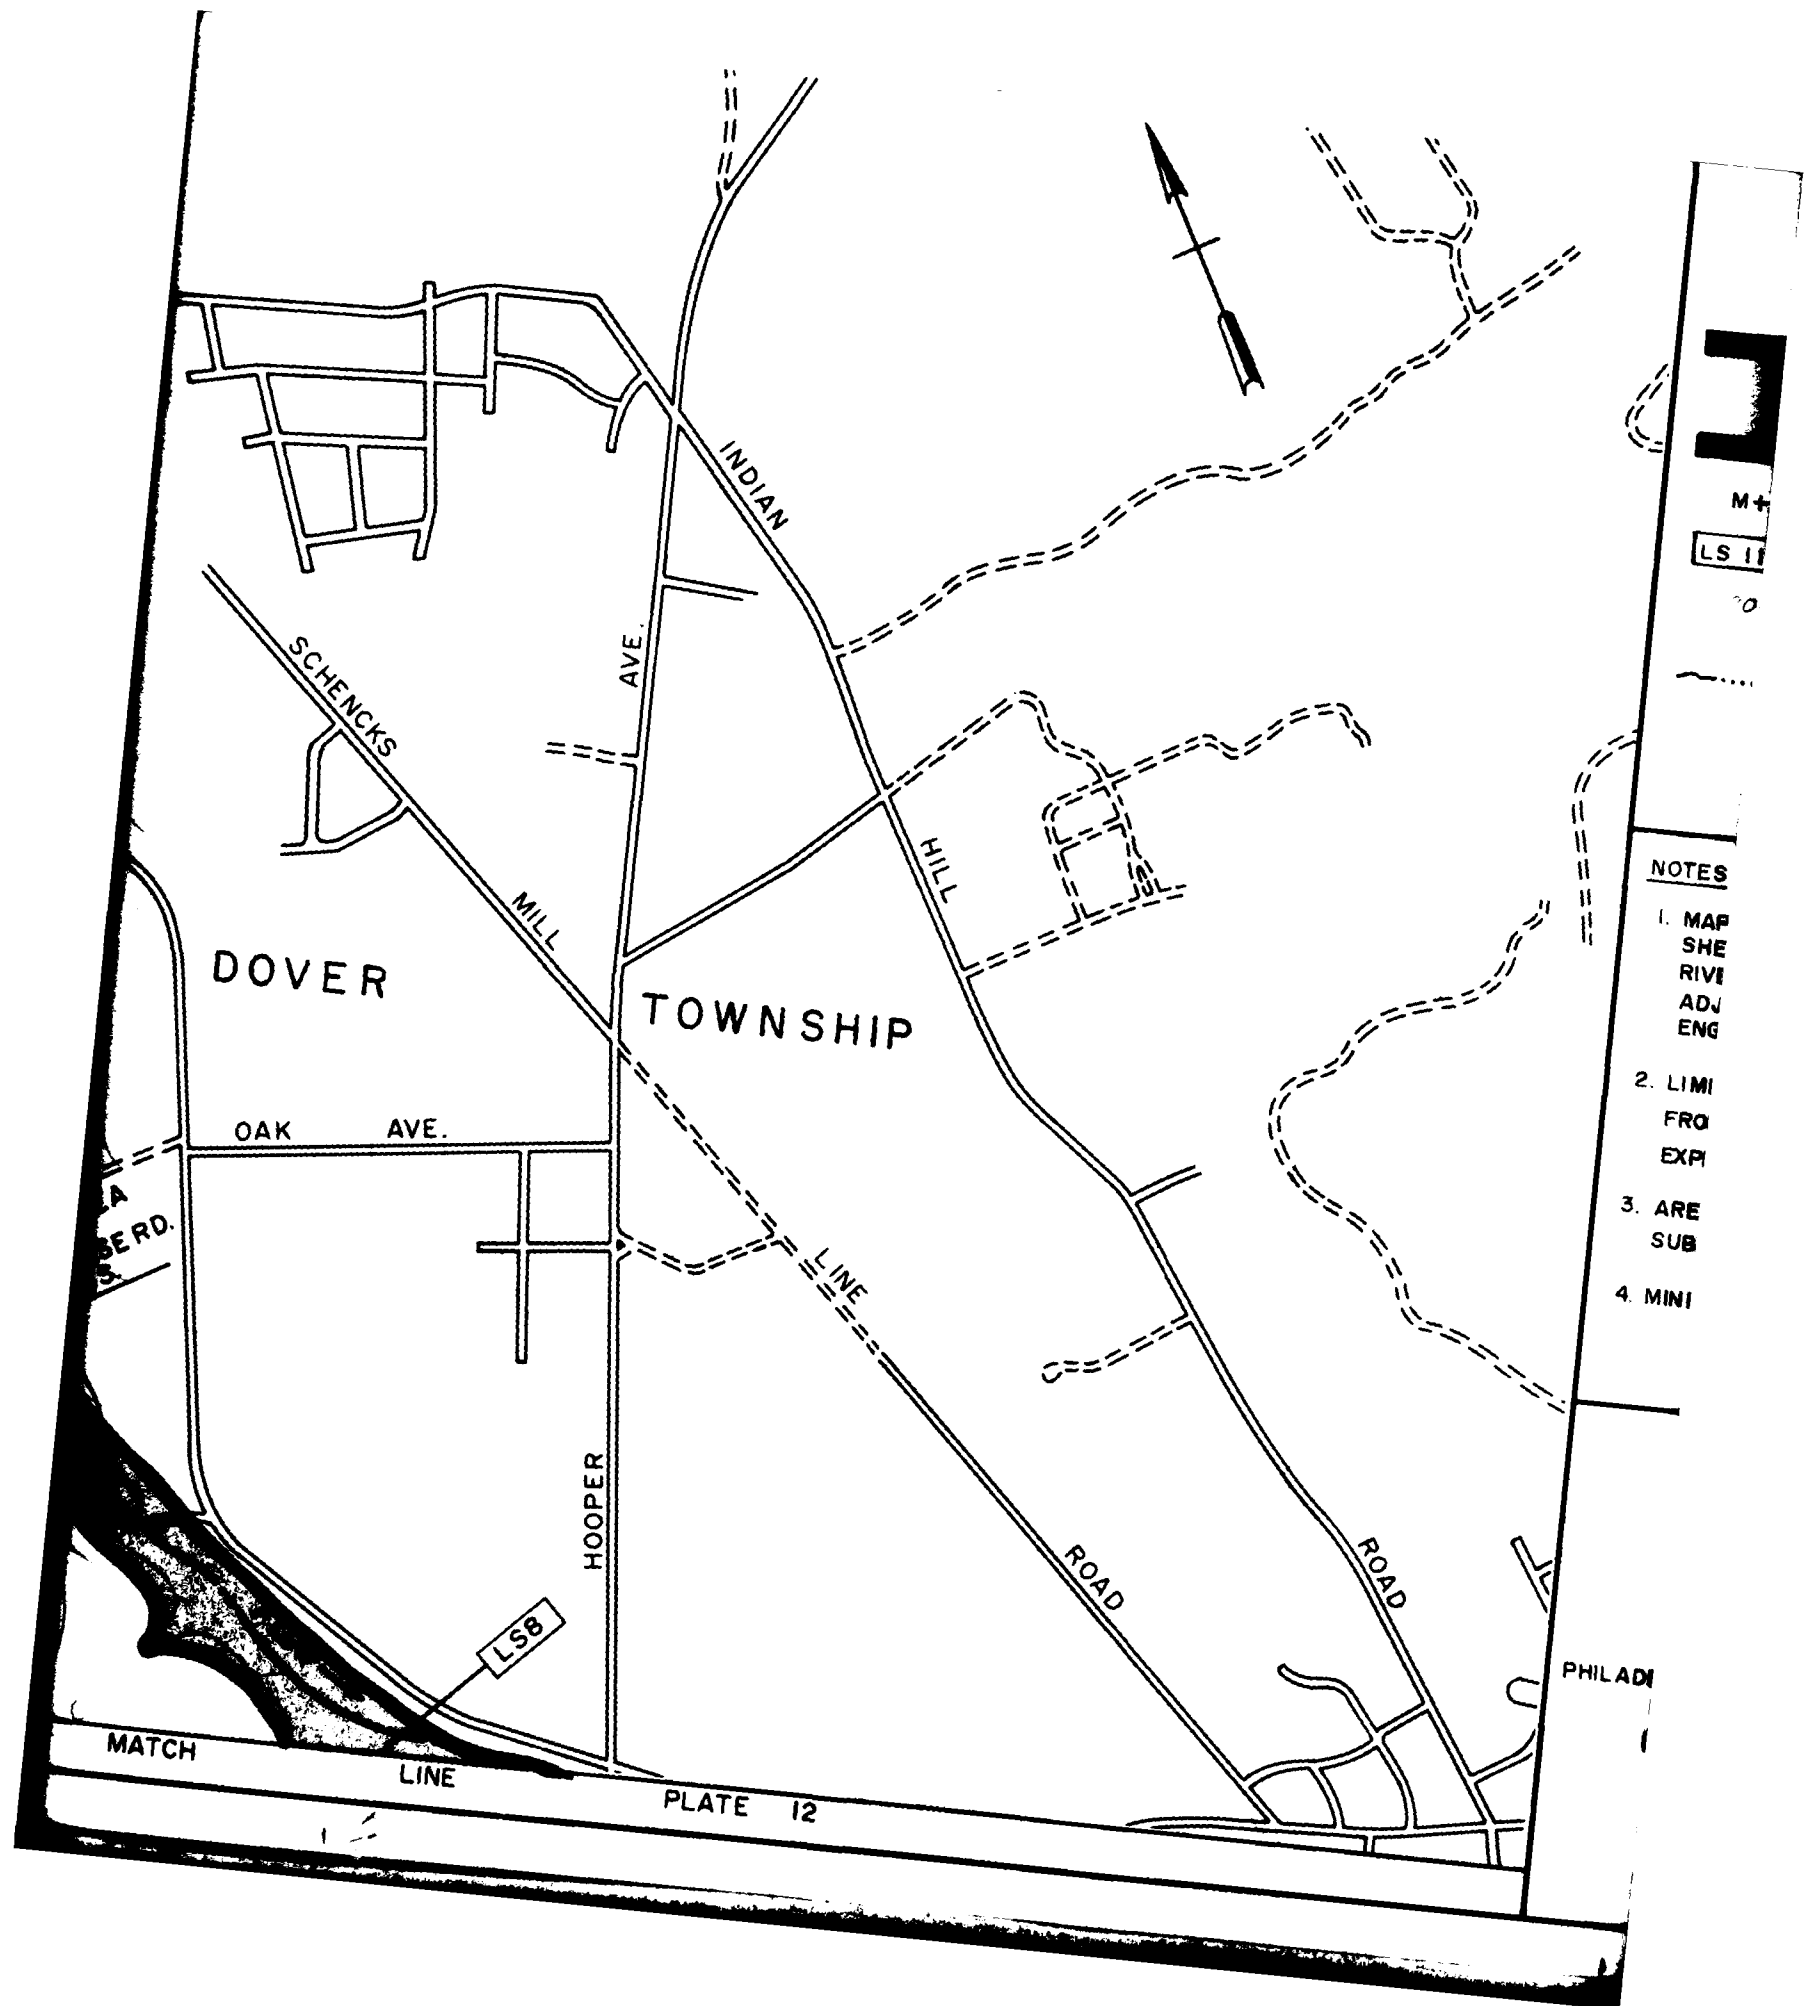

LEGEND

OVERFLOW LIMITS



M+3 MILES ABOVE MOUTH

LS 11 CROSS SECTION

GROUND ELEVATION IN FEET (U.S.C. &
G.S. 1929 ADJ.) SEA LEVEL DATUM

~ ~ ~ ~ ~ STREAM CENTERLINE

NOTES

1. MAP BASED ON U.S.G.S. 7.5 MIN. QUADRANGLE SHEETS LAKEWOOD, N.J., 1954 & TOMS RIVER, N.J., 1953. MINOR ADDITIONS AND ADJUSTMENTS MADE BY CORPS OF ENGINEERS.
2. LIMITS OF OVERFLOW SHOWN MAY VARY FROM ACTUAL LOCATION ON GROUND AS EXPLAINED IN THE REPORT.
3. AREAS OUTSIDE THE FLOOD PLAIN MAY BE SUBJECT TO FLOODING FROM LOCAL RUNOFF.
4. MINIMUM CONTOUR INTERVAL IS 10 FT.

SCALE IN FEET





DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION

TOMS RIVER
OCEAN COUNTY, N.J.



FLOODED AREAS
JUNE 1972



ELEVATION IN FEET (U.S.C. & G.S. 1929 ADJ.) MEAN SEA LEVEL DATUM

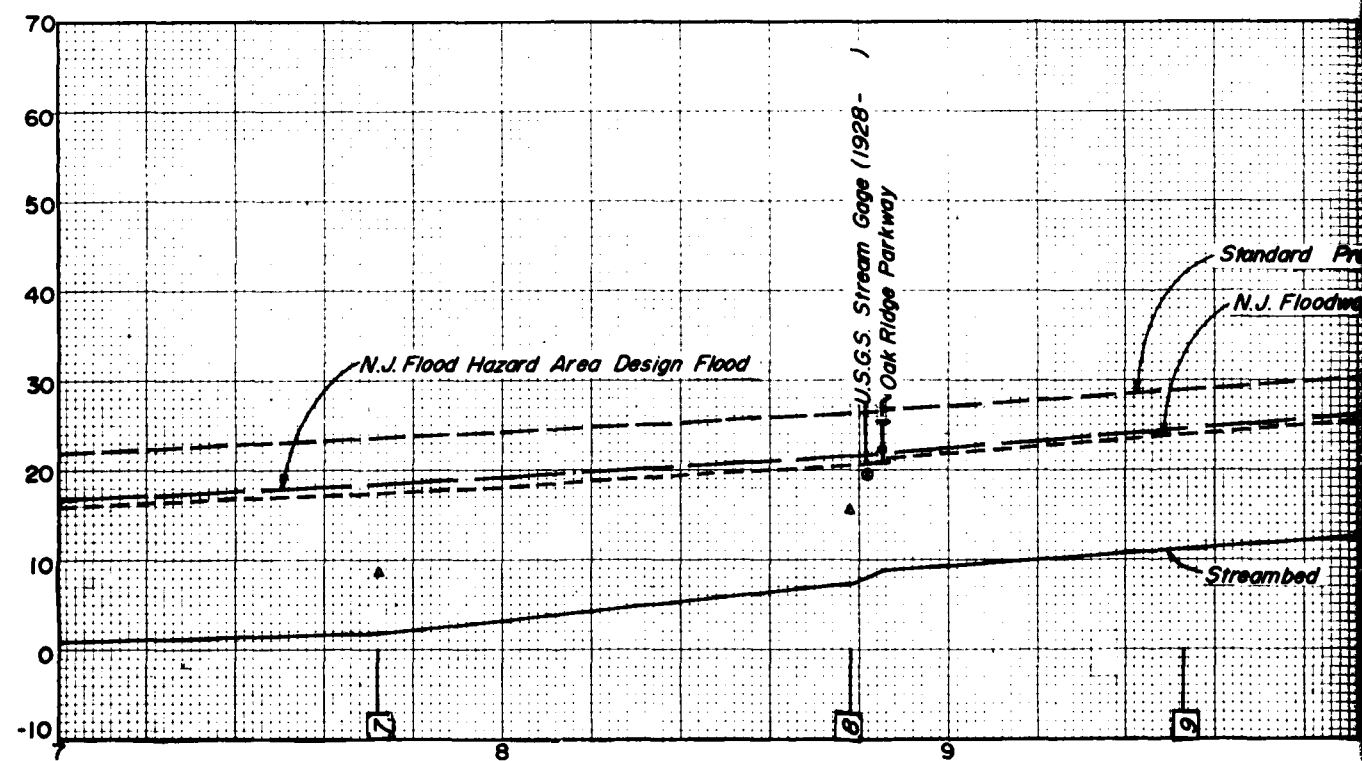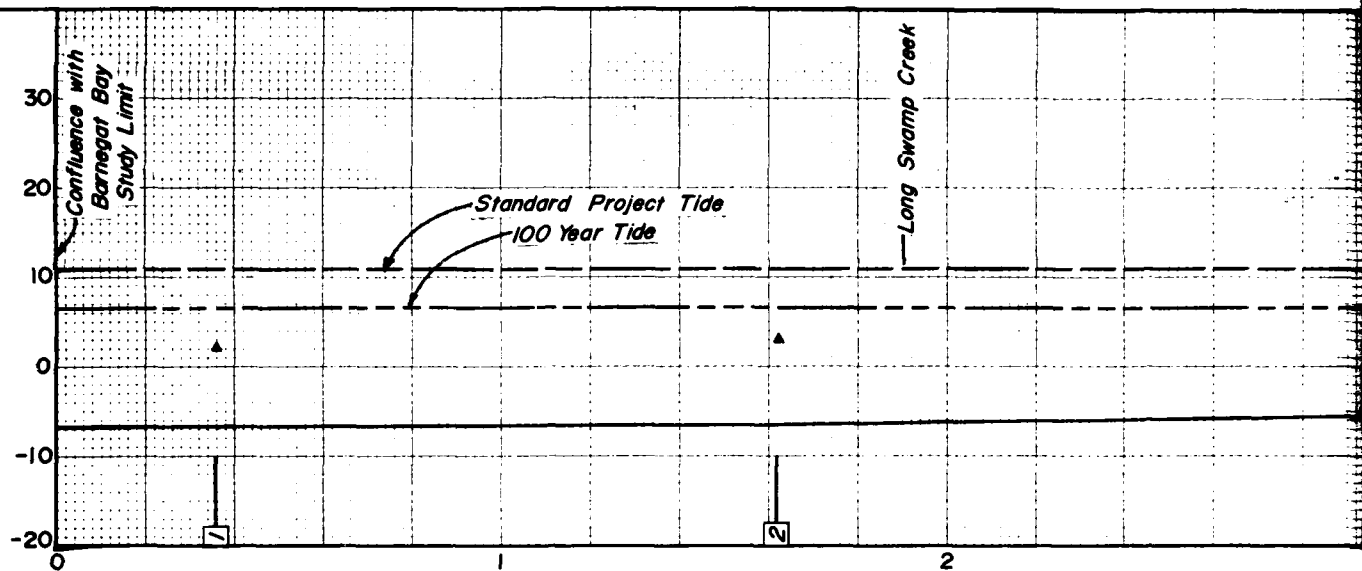

LEGEND



- Top of Bridge Railing
- Bridge Floor
- Underclearance
- Top of Rail (R.R. Bridge)
- Top of Low Bank

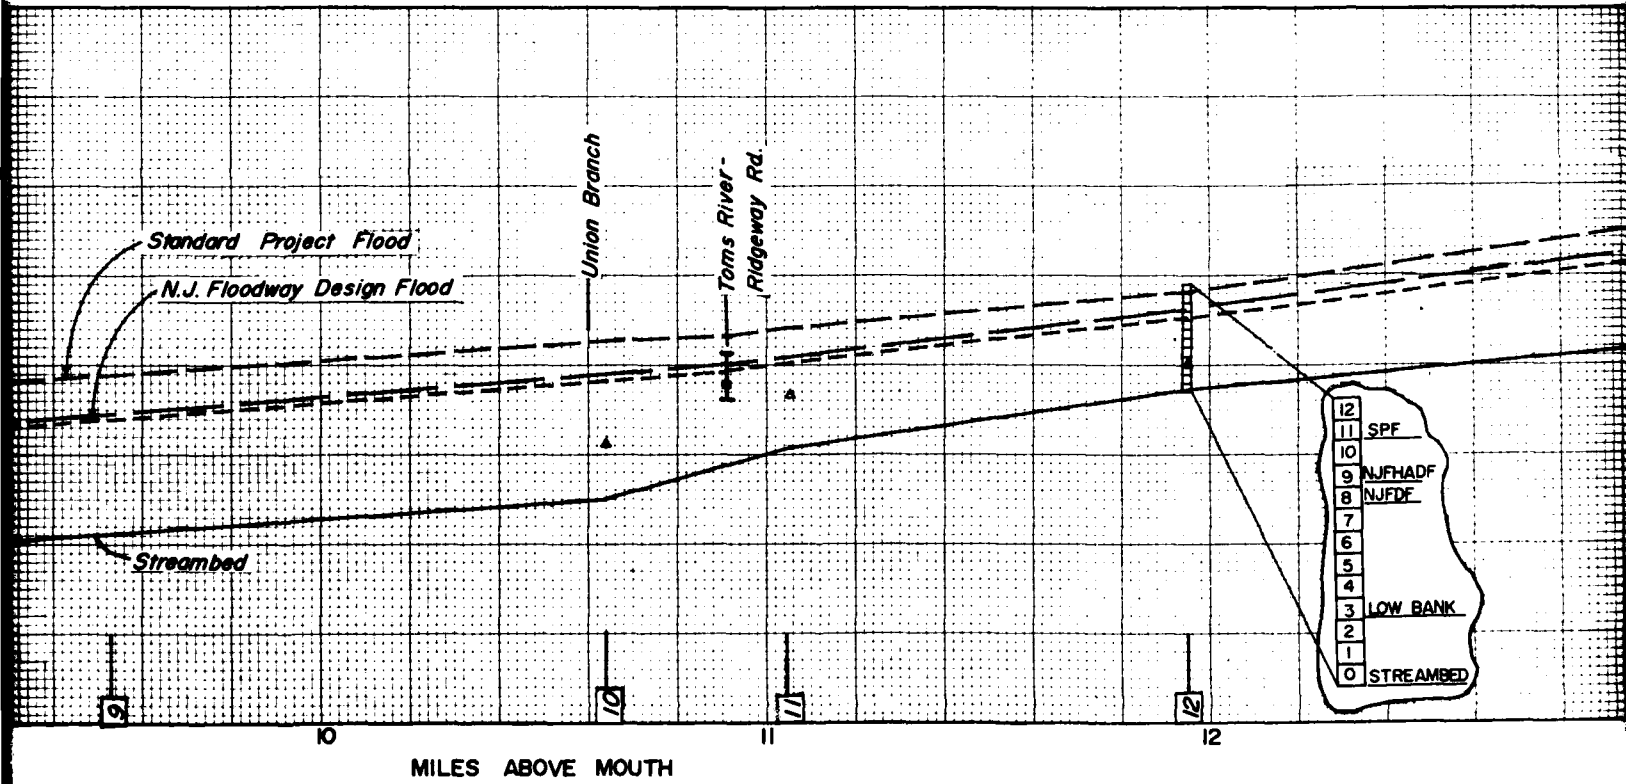
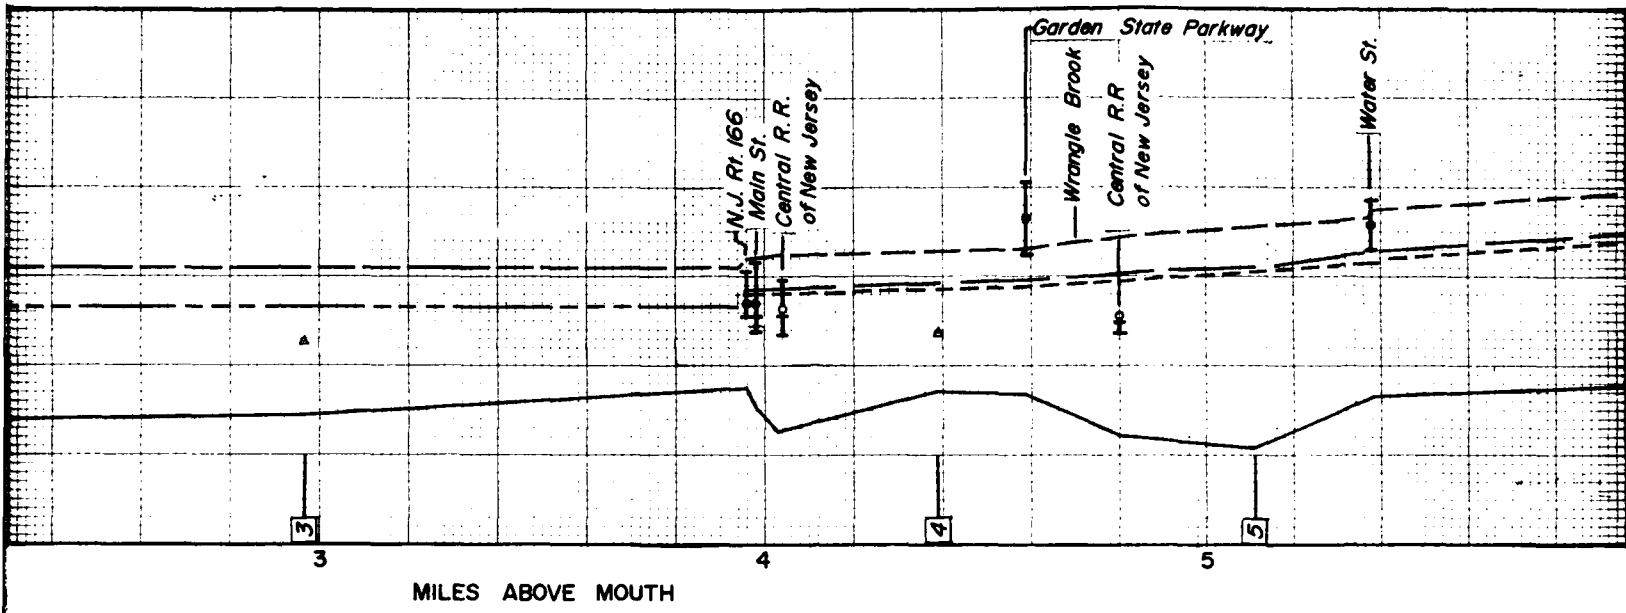


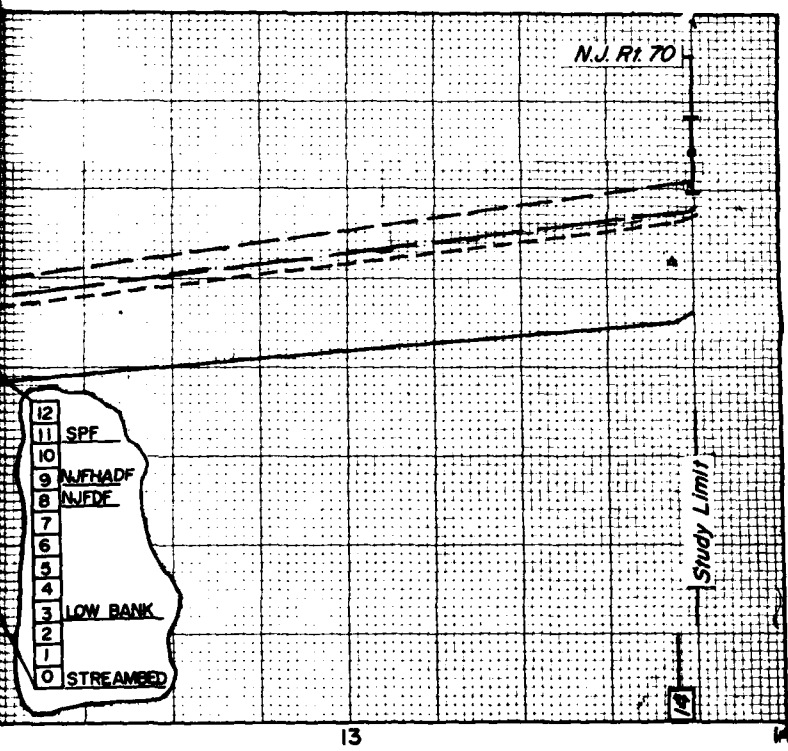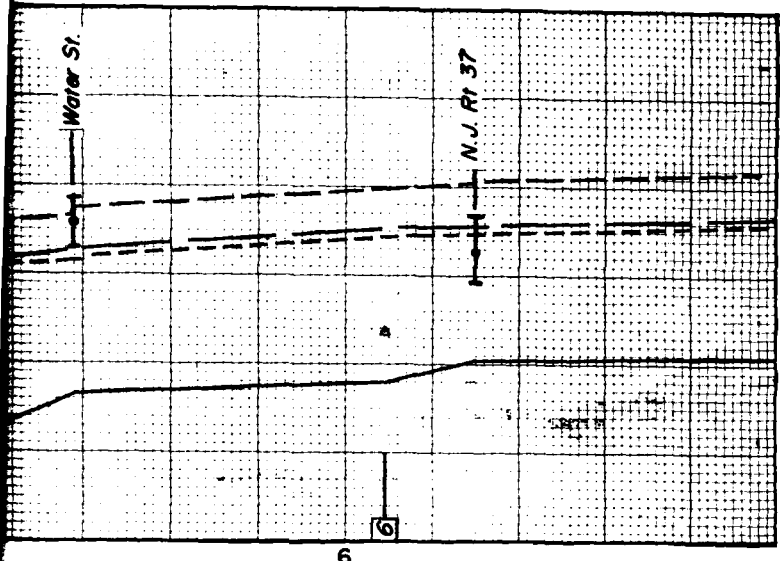

DEPARTMENT OF THE ARMY
 PHILADELPHIA DISTRICT CORPS OF ENGINEERS
 PHILADELPHIA, PENNSYLVANIA
 FLOOD PLAIN INFORMATION
 TOMS RIVER
NEW JERSEY
 HIGH WATER PROFILES
 TOMS RIVER MAIN STEM
 JUNE 1972

ELEVATION IN FEET (U.S.C. & G.S. 1929 ADJ.) MEAN SEA LEVEL DATUM

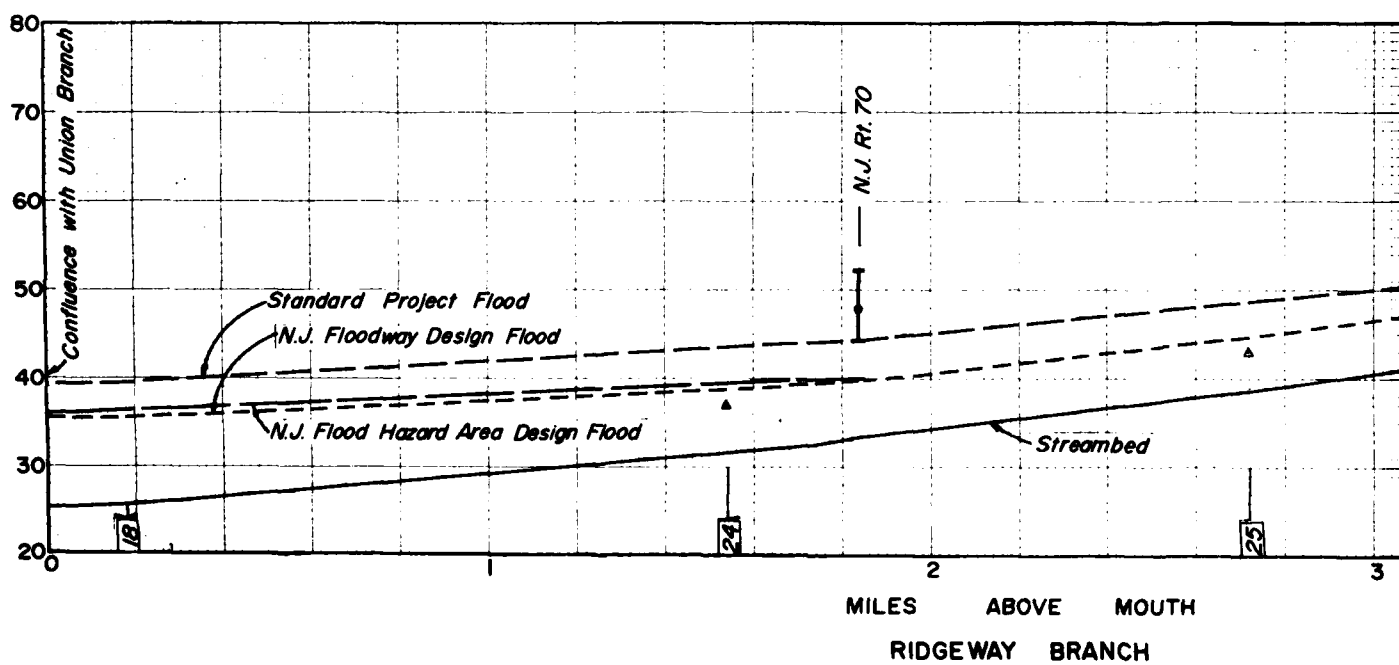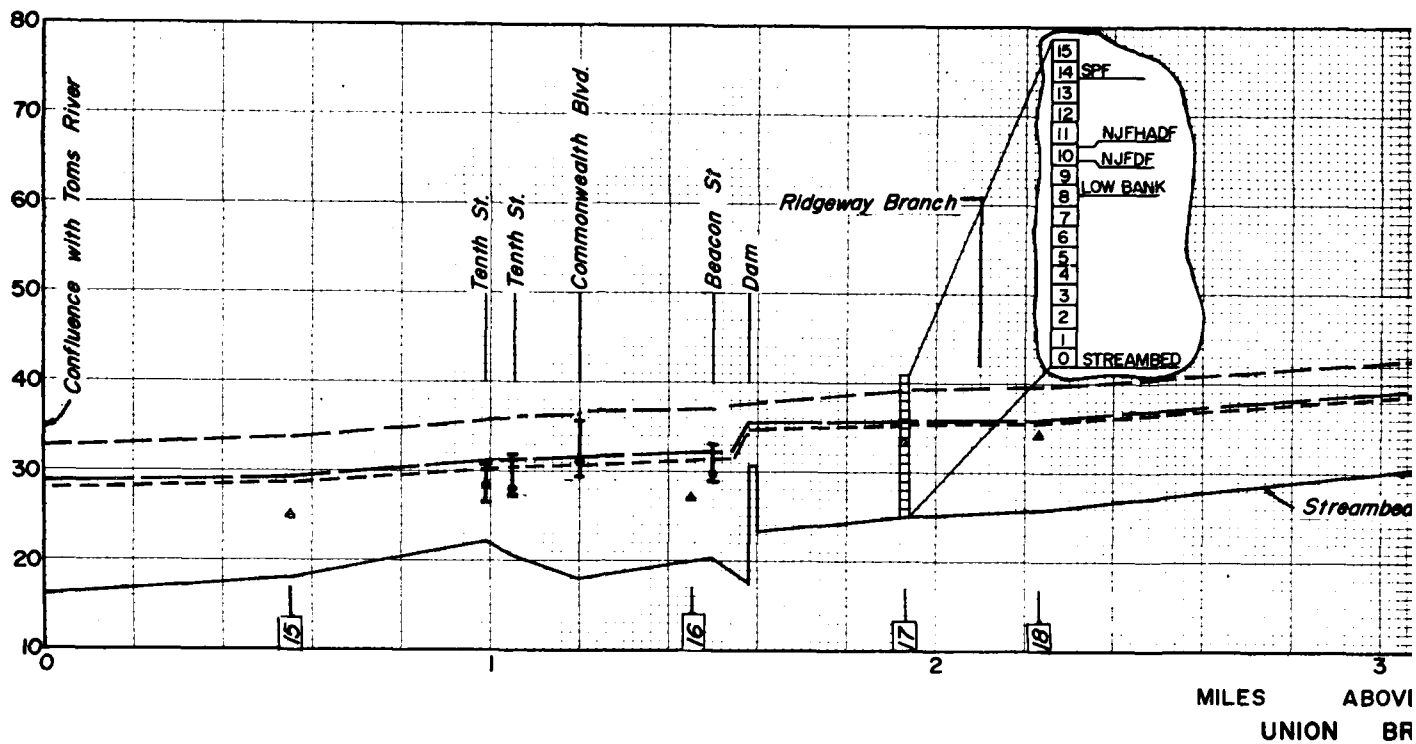

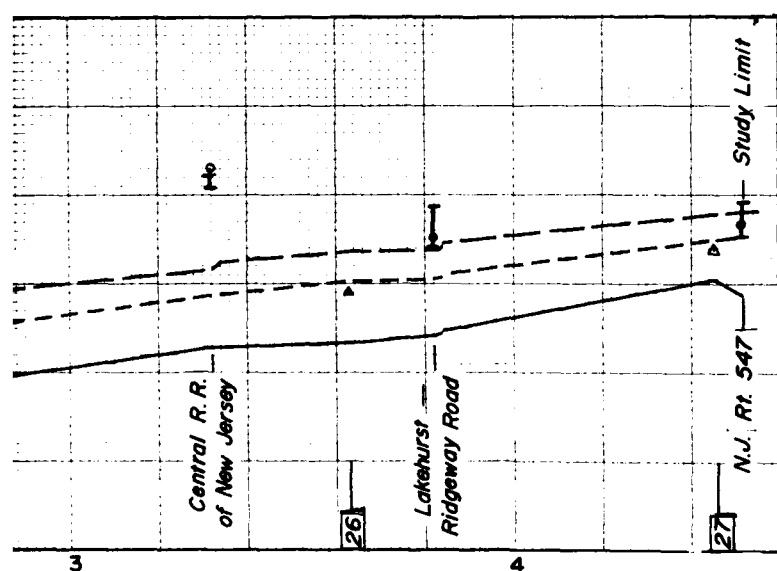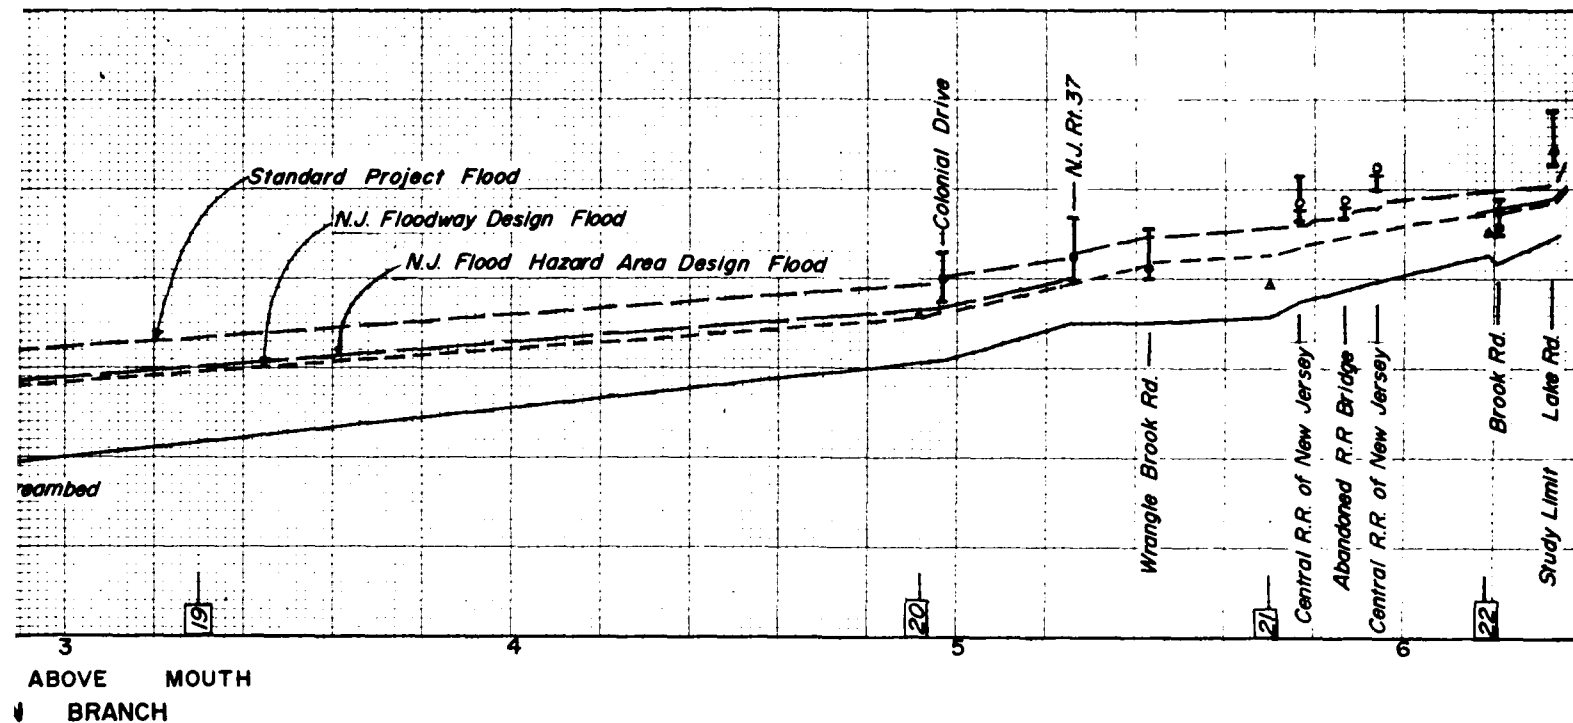


LEGEND

- Top of Bridge Railing
- Bridge Floor
- Underclearance
- Top of Rail (Railroad Bridge)
- Top of Low Bank

NOTE:

Upstream of N.J. Route 37 on Union Branch and upstream of N.J. Route 70 on Ridgeway Branch the Floodway Design and the Flood Hazard Area Design Floods are approximately the same elevation.

DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION
TOMS RIVER
NEW JERSEY
HIGH WATER PROFILES
RIDGWAY BRANCH AND UNION BRANCH
JUNE 1972

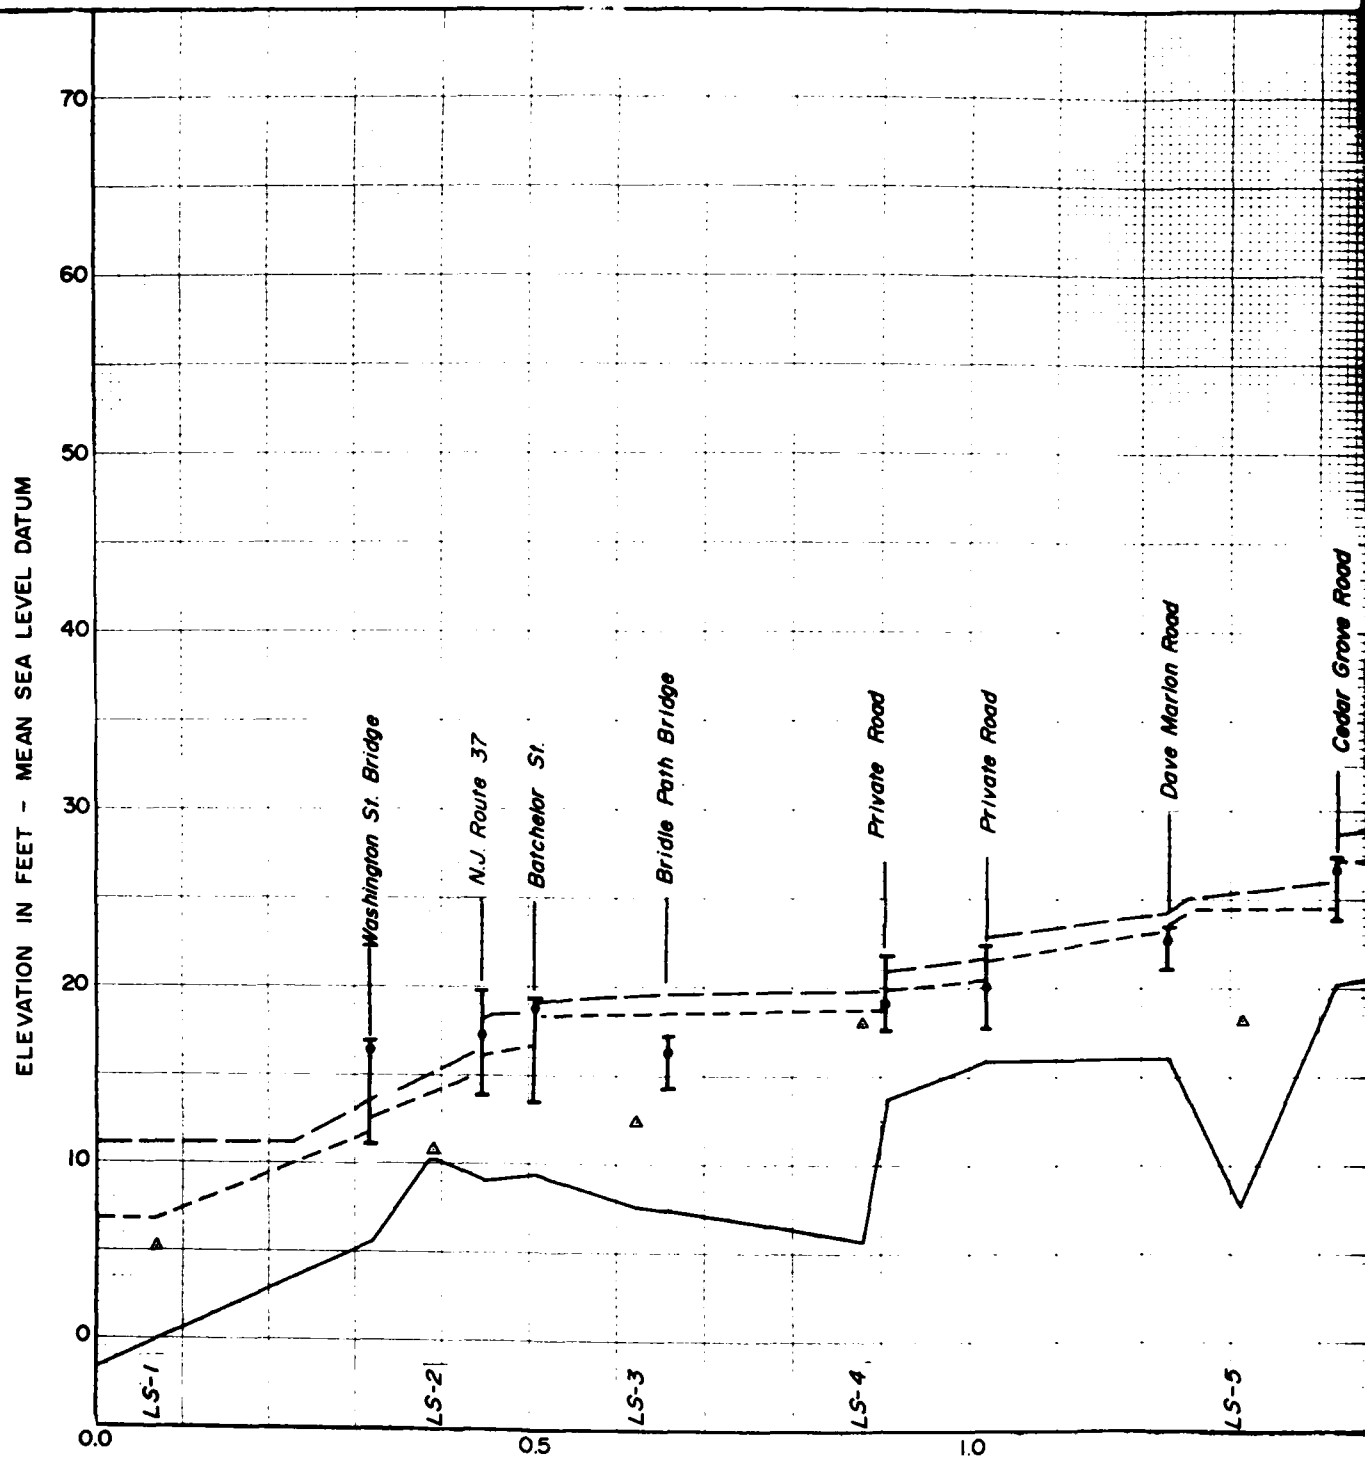



LEGEND

- Top of Bridge Railing
- Bridge Floor
- Underclearance
- Top of Rail (R.R. Bridge)


NOTE:

The N.J. Floodway Design Flood and the Flood Hazard Area Design Flood are approximately the same elevation.

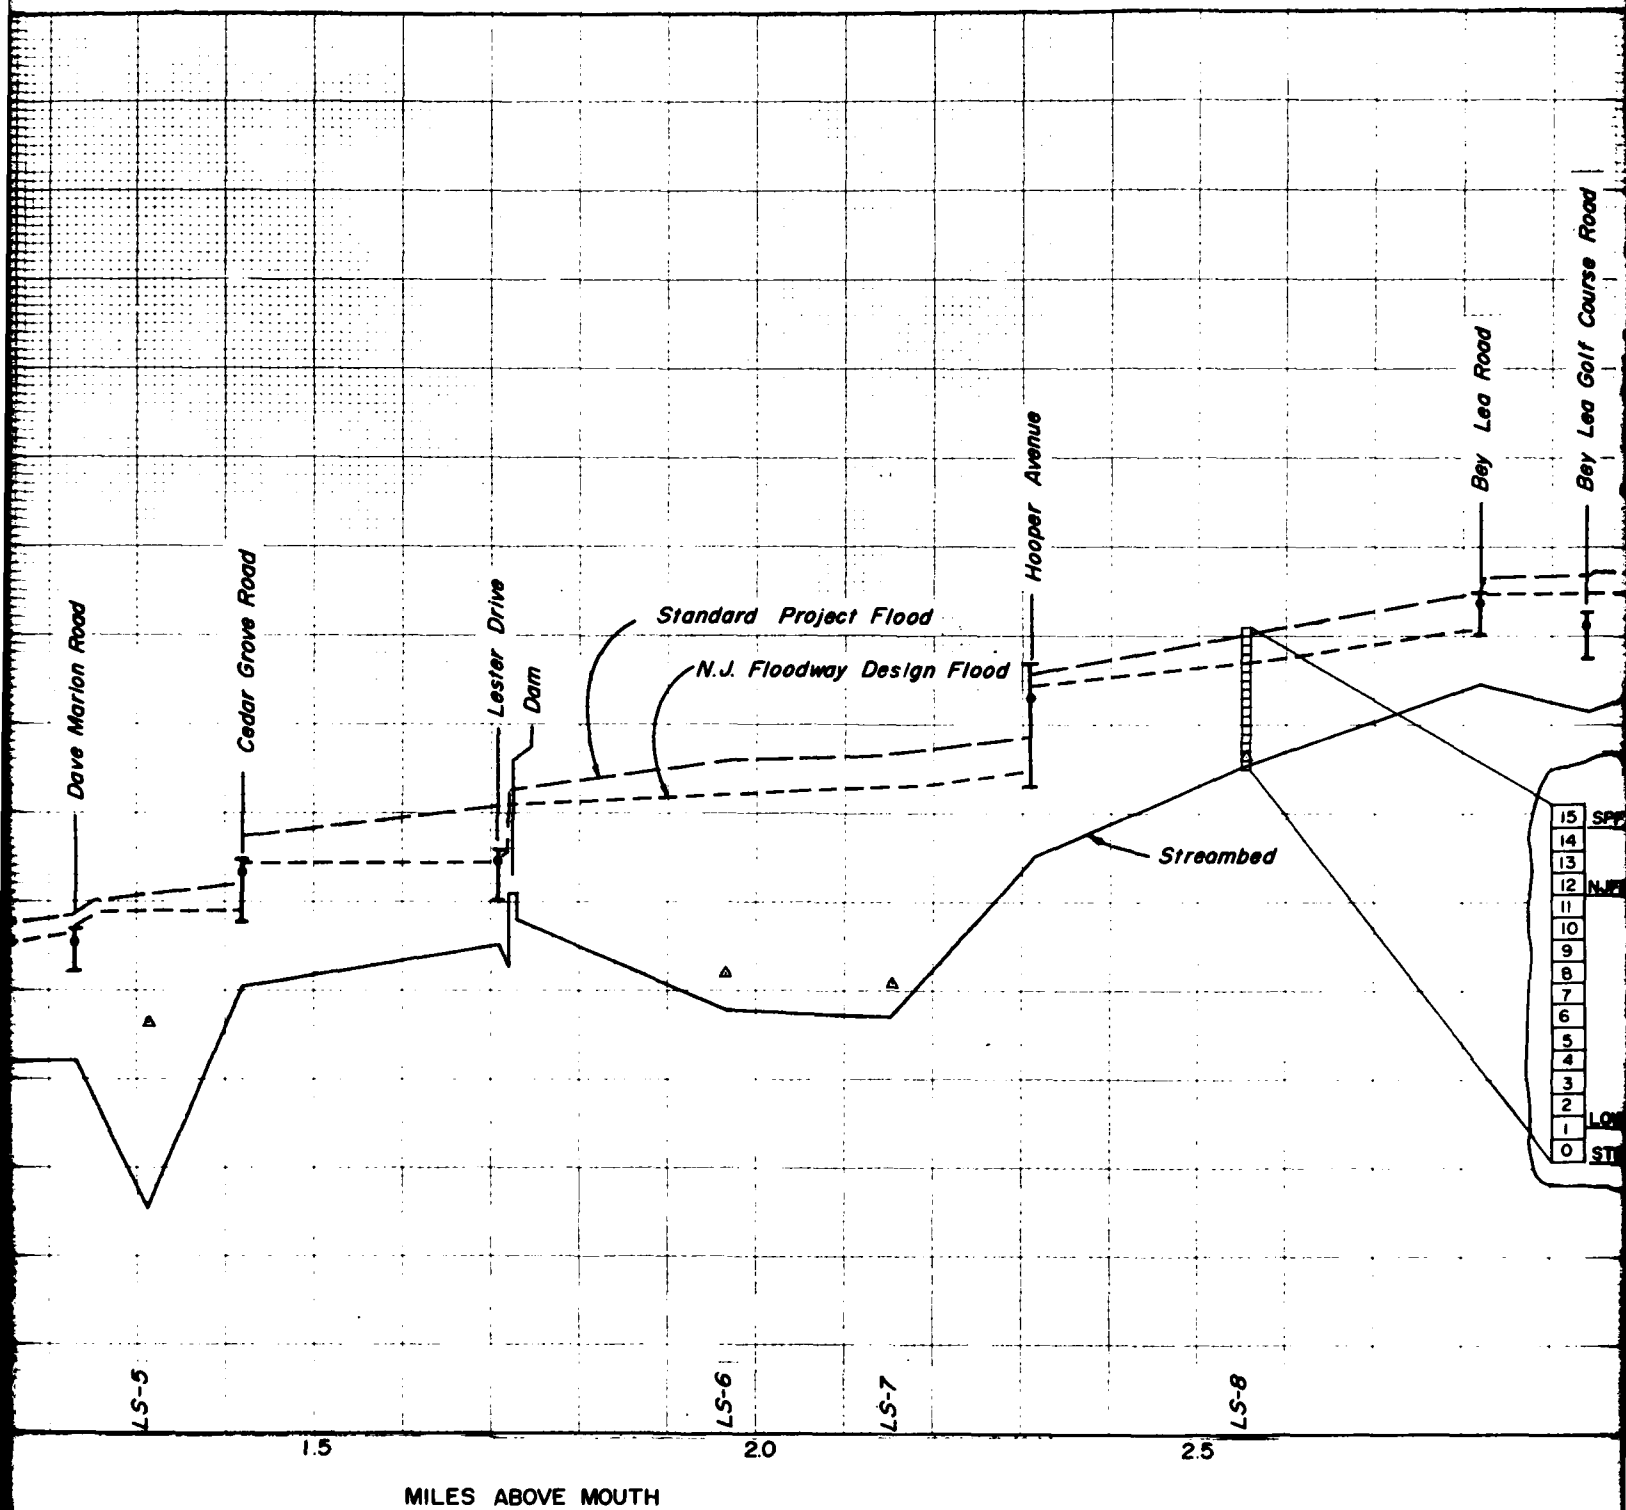


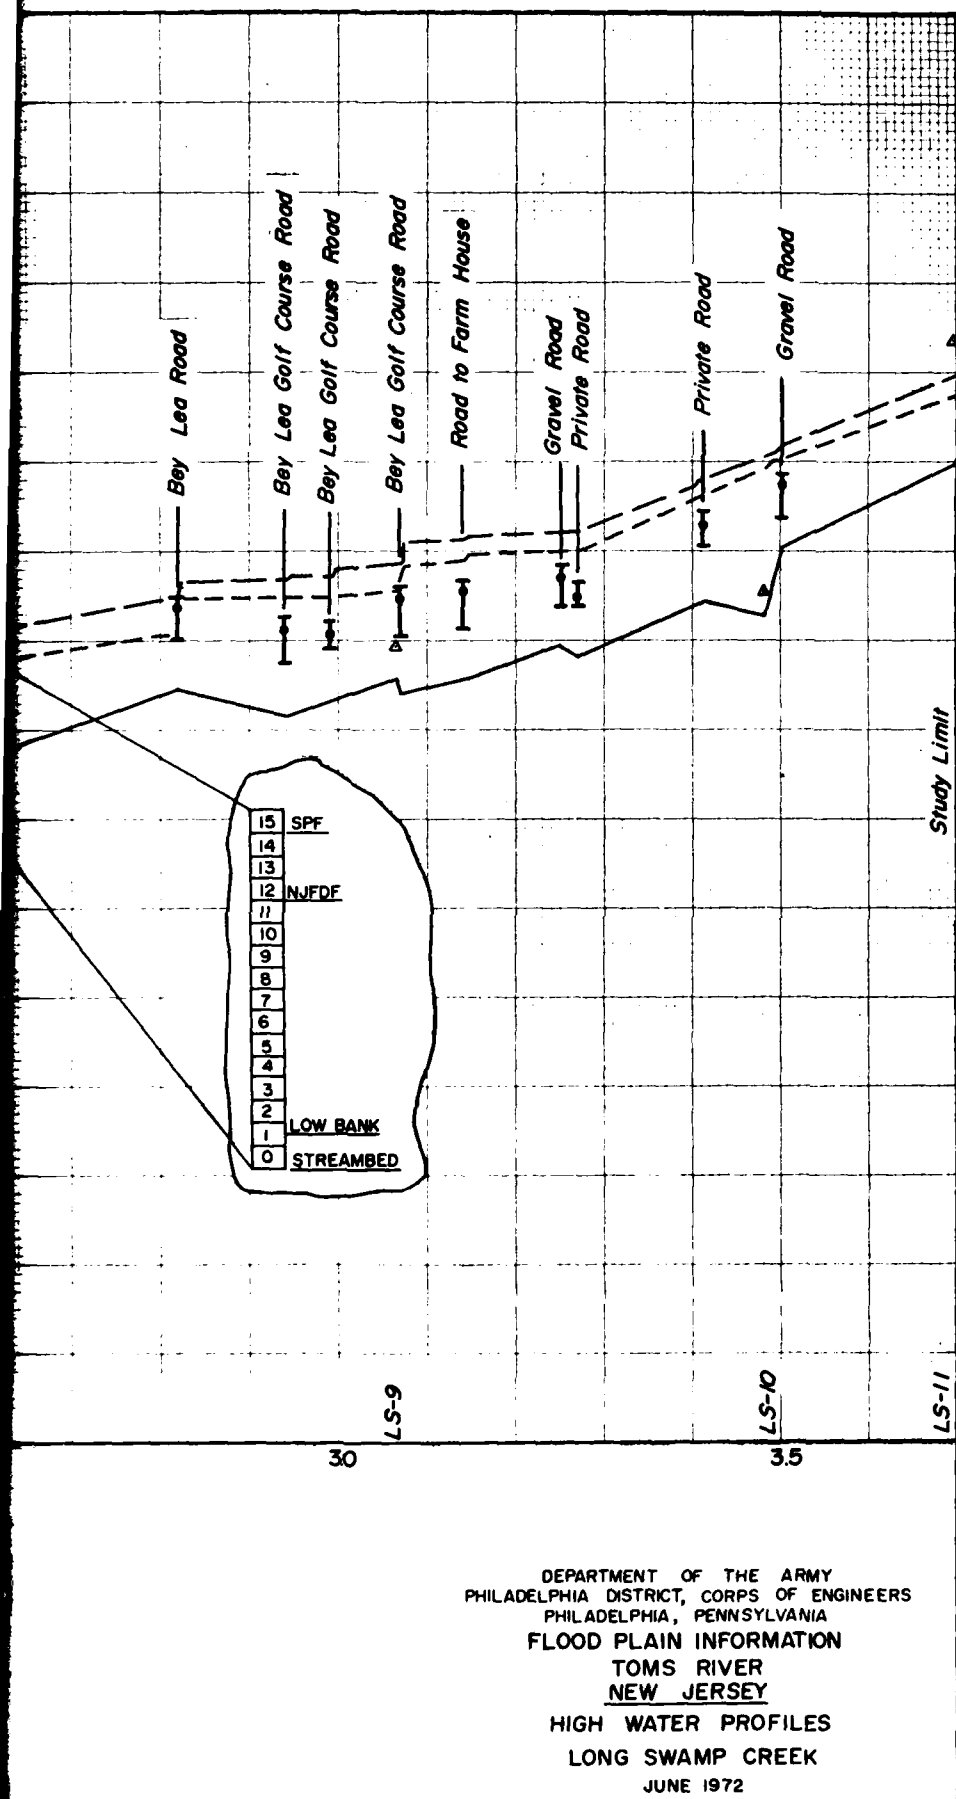


ELEVATION IN FEET (U.S.C. & G.S 1929 ADJ.) MEAN SEA LEVEL DATUM

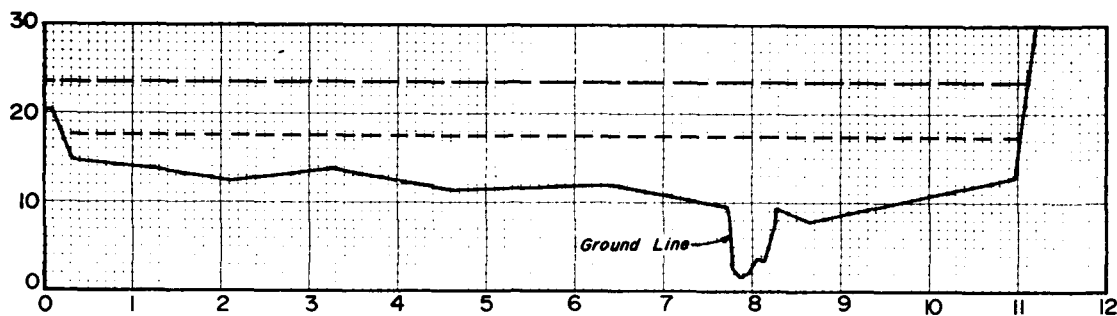

CROSS SECTION NO. 7
MILE 7.72

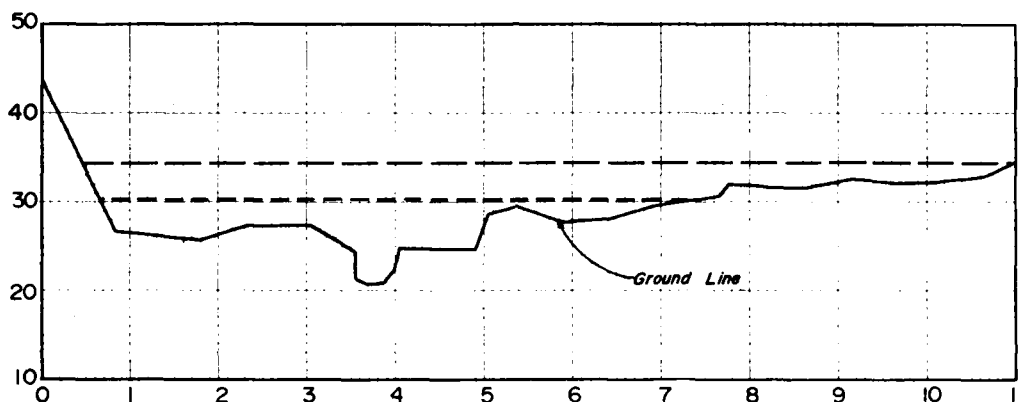

CROSS SECTION NO. 11
MILE 11.05

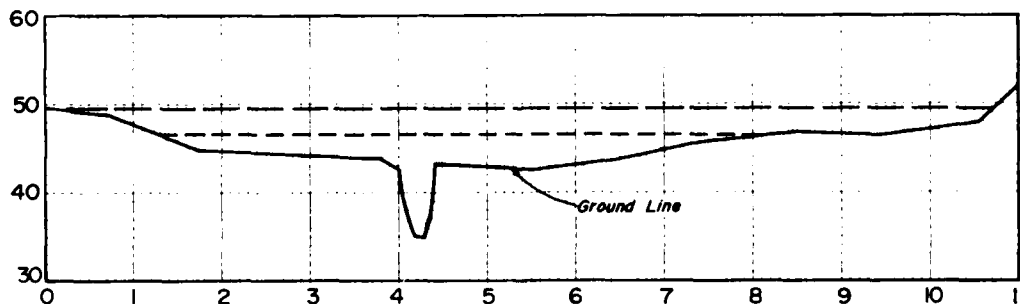


CROSS SECTION NO. 14
MILE 13.75


HORIZONTAL DISTANCE IN HUNDREDS OF FEET

LEGEND

- — — Standard Project Flood
- - - - New Jersey Floodway Design Flood
- Sections taken looking downstream
- 20 Sections not shown

DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION
TOMS RIVER
NEW JERSEY
SELECTED CROSS SECTIONS
TOMS RIVER MAIN STEM
JUNE 1972

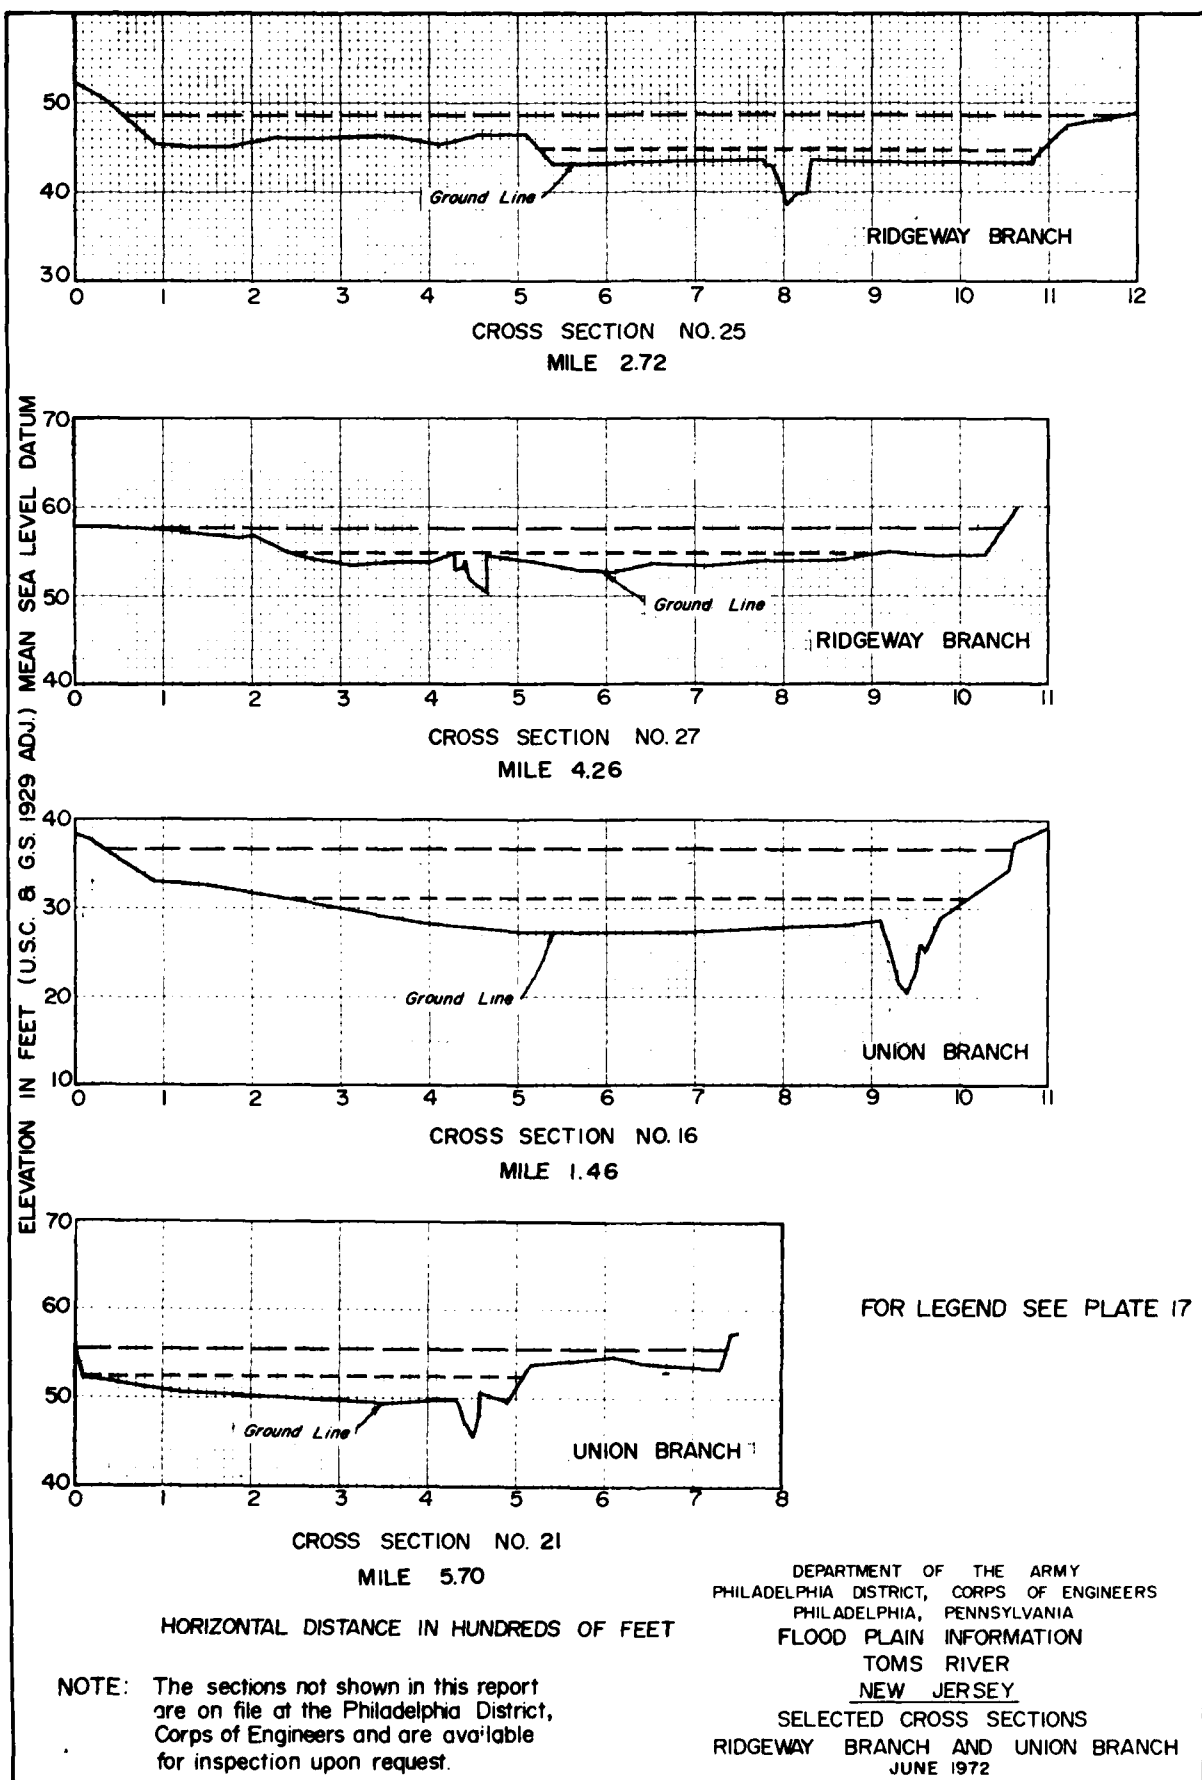

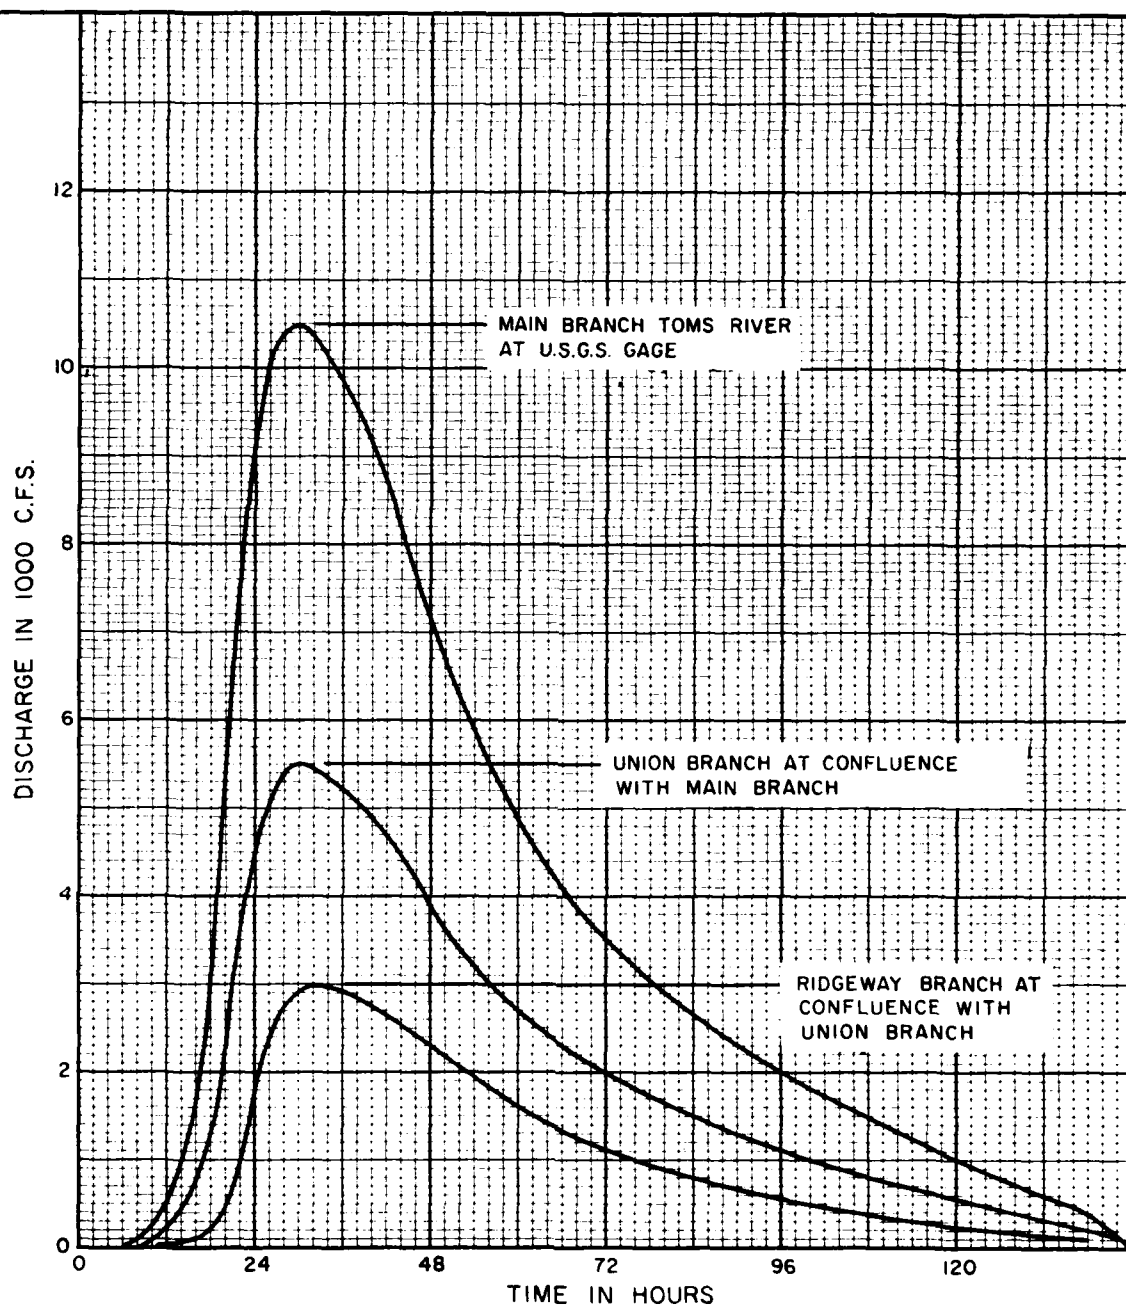

DEPARTMENT OF THE ARMY
PHILADELPHIA DISTRICT, CORPS OF ENGINEERS
PHILADELPHIA, PENNSYLVANIA
FLOOD PLAIN INFORMATION
TOMS RIVER
OCEAN COUNTY, N. J.

STANDARD PROJECT FLOOD
HYDROGRAPH
JUNE 1972

DATE
FILMED
-8